Wall Mounting Options

DRYWALL CUTOUT

PRE-DRILL HOLE ON WALL (4x)

MOUNTING SCREW & PLASTIC ANCHOR
(4 Pieces Each Provided)

EARTH GROUND CABLE

⏚ EARTH GROUND HERE

Recommended Wall Cutout Dimensions

0.250 [6.4]

0.250 [6.4]

Wall Cutout

0.250 [6.4]

0.250 [6.4]

0.250 [6.4]

Dimensions are in Inch [Millimeter]
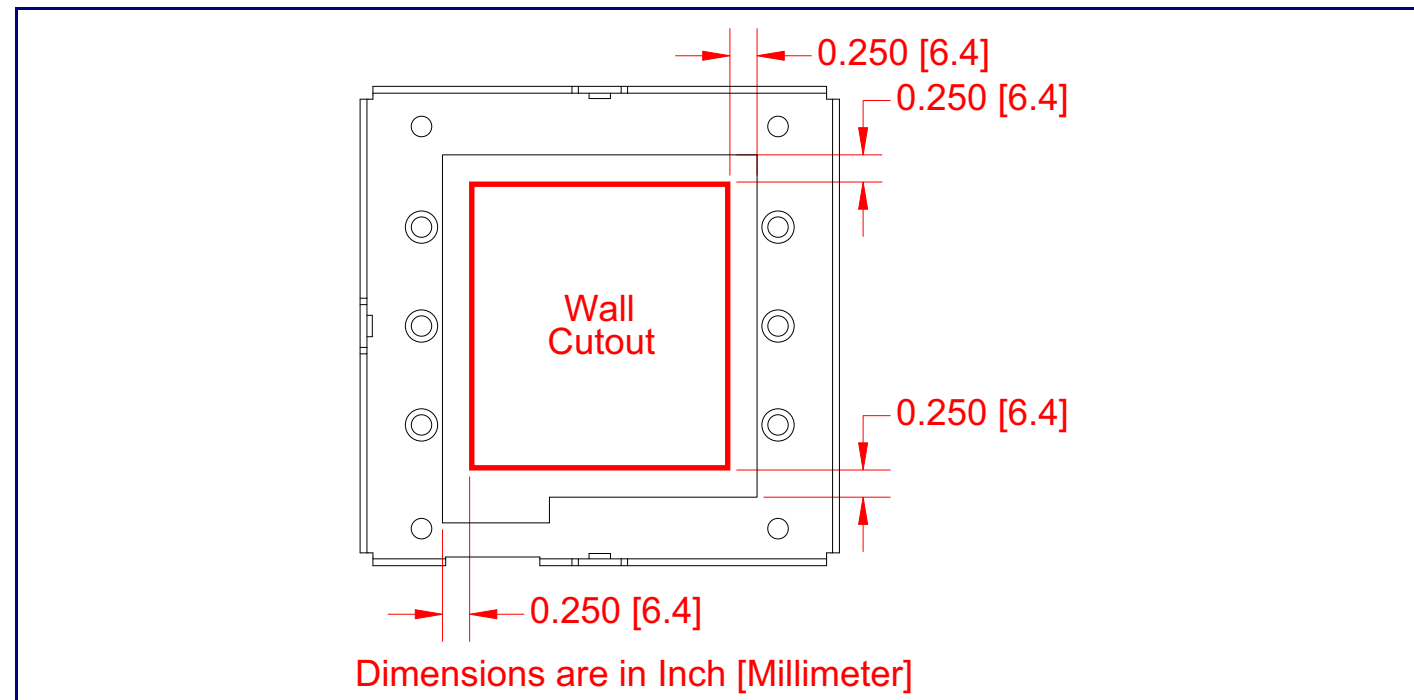
Contacting CyberData

Corporate Headquarters

CyberData Corporation
3 Justin Court
Monterey, CA 93940, USA

Phone: 831-373-2601
Fax: 831-373-4193
www.CyberData.net

Sales: (831) 373-2601 ext. 334
Support: 831-373-2601 ext. 333
Web: **http://www.cyberdata.net/support/contactsupportvoip.html**
RMA Dept: (831) 373-2601 ext. 136
Email: RMA@CyberData.net
RMA Status: **http://www.cyberdata.net/support/rmastatus.html**

Warranty information is available at:
Web: **http://www.cyberdata.net/support/warranty/index.html**

CyberData
The IP Endpoint Company

Installation Quick Reference
VoIP Indoor Office Ringer
SiP Compliant
011149*, RAL 9003, Signal White

Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address[a]	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask[a]	255.0.0.0
Default Gateway[a]	10.0.0.1

a. Default if there is not a DHCP server present.

Typical System Installation

Generic PoE Switch

1 2 3 4 5 6

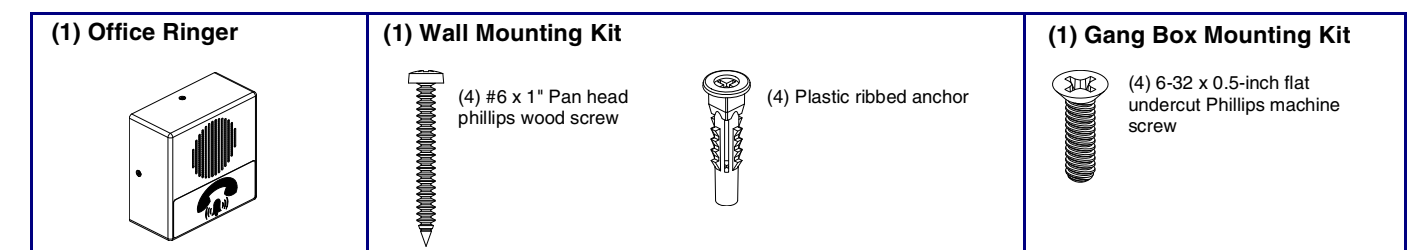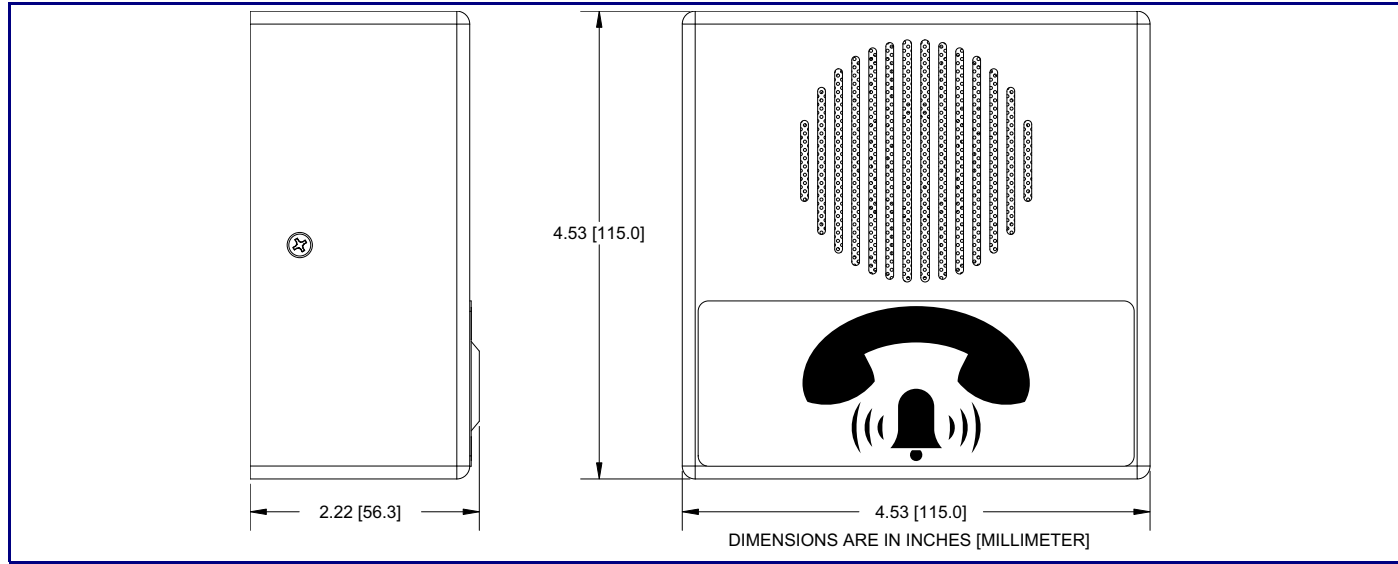Strobe Light   VoIP Office Ringer   VoIP Office Ringer   IP Phone   IP PBX Server
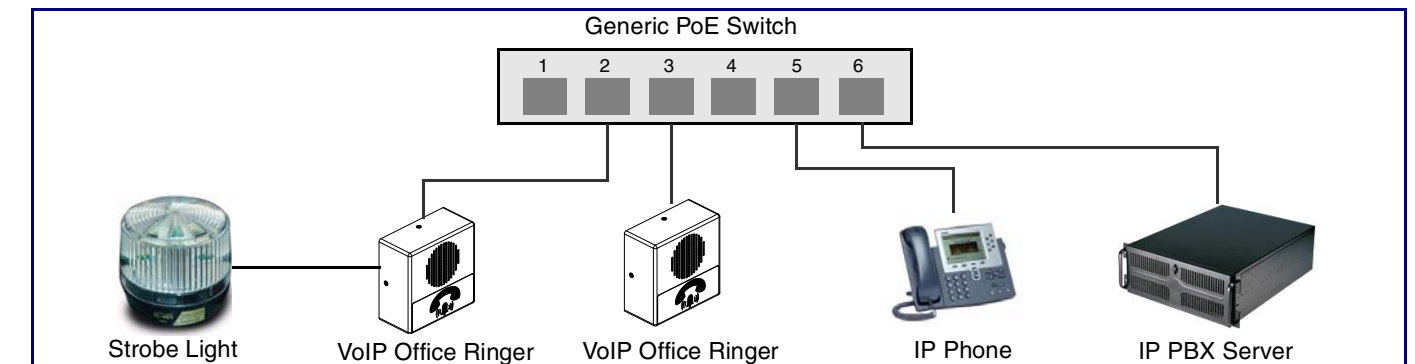
Getting Started

- Download the *VoIP Indoor Office Ringer Operations Guide* PDF file from the following website address:

  http://www.cyberdata.net/products/voip/digitalanalog/officeringer/docs.html

- Create a plan for the locations of your Office Ringers.

- Prior to installation, consult local building and electrical code requirements.

- WARNING: This enclosure is not rated for any AC voltages!

Office Ringer Parts
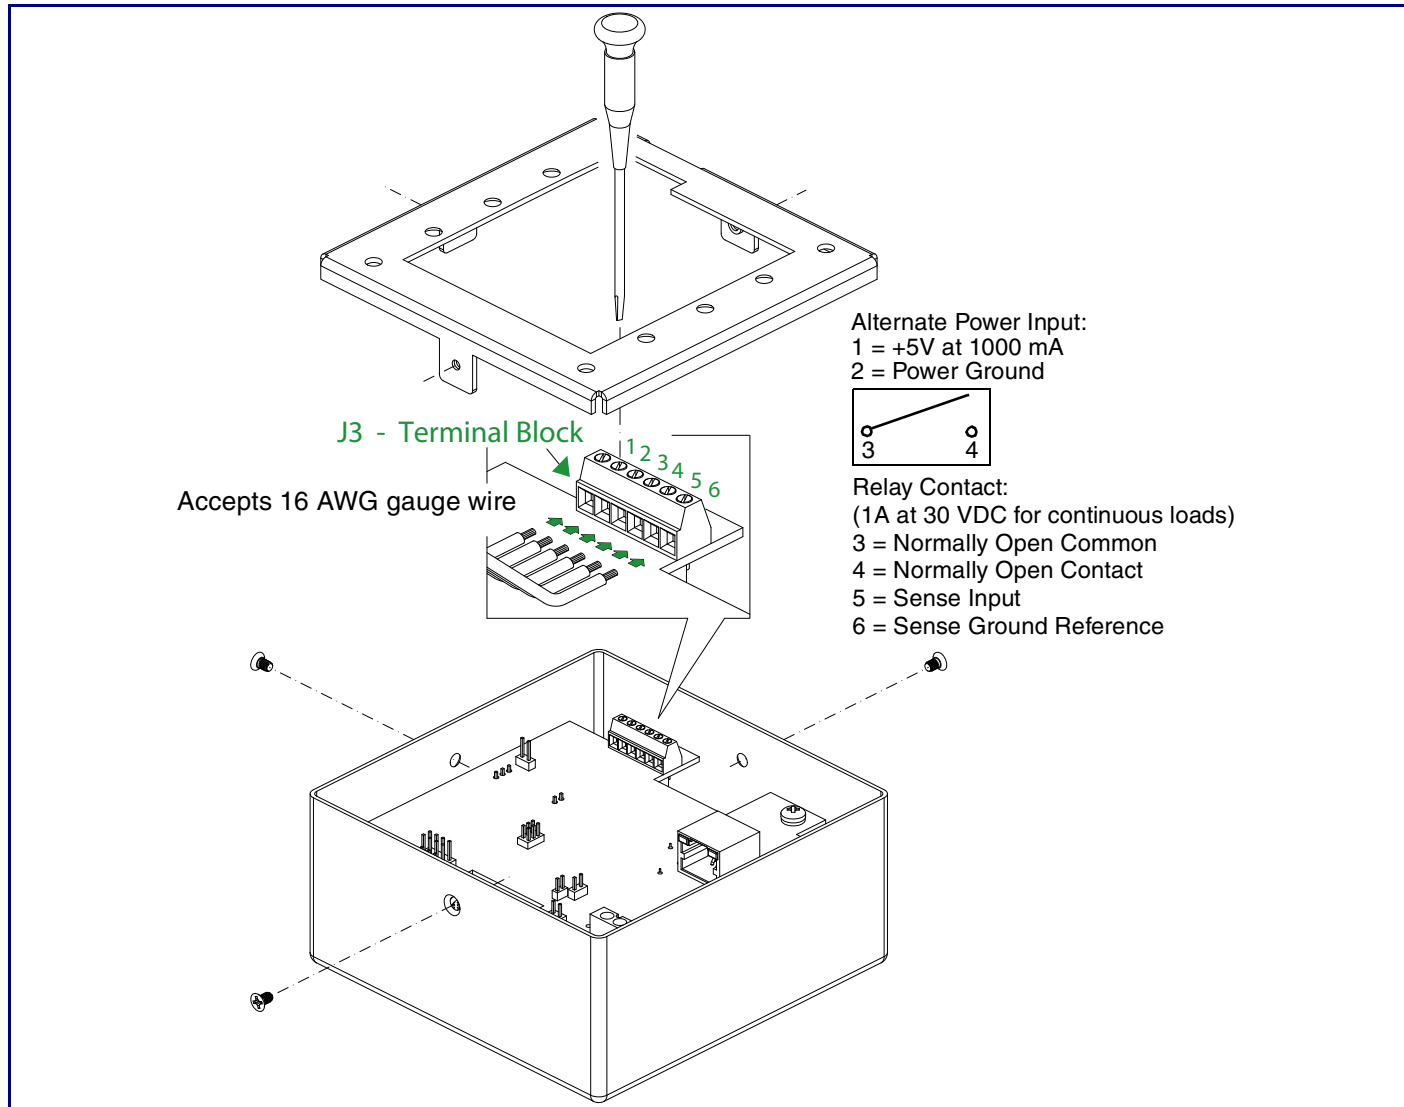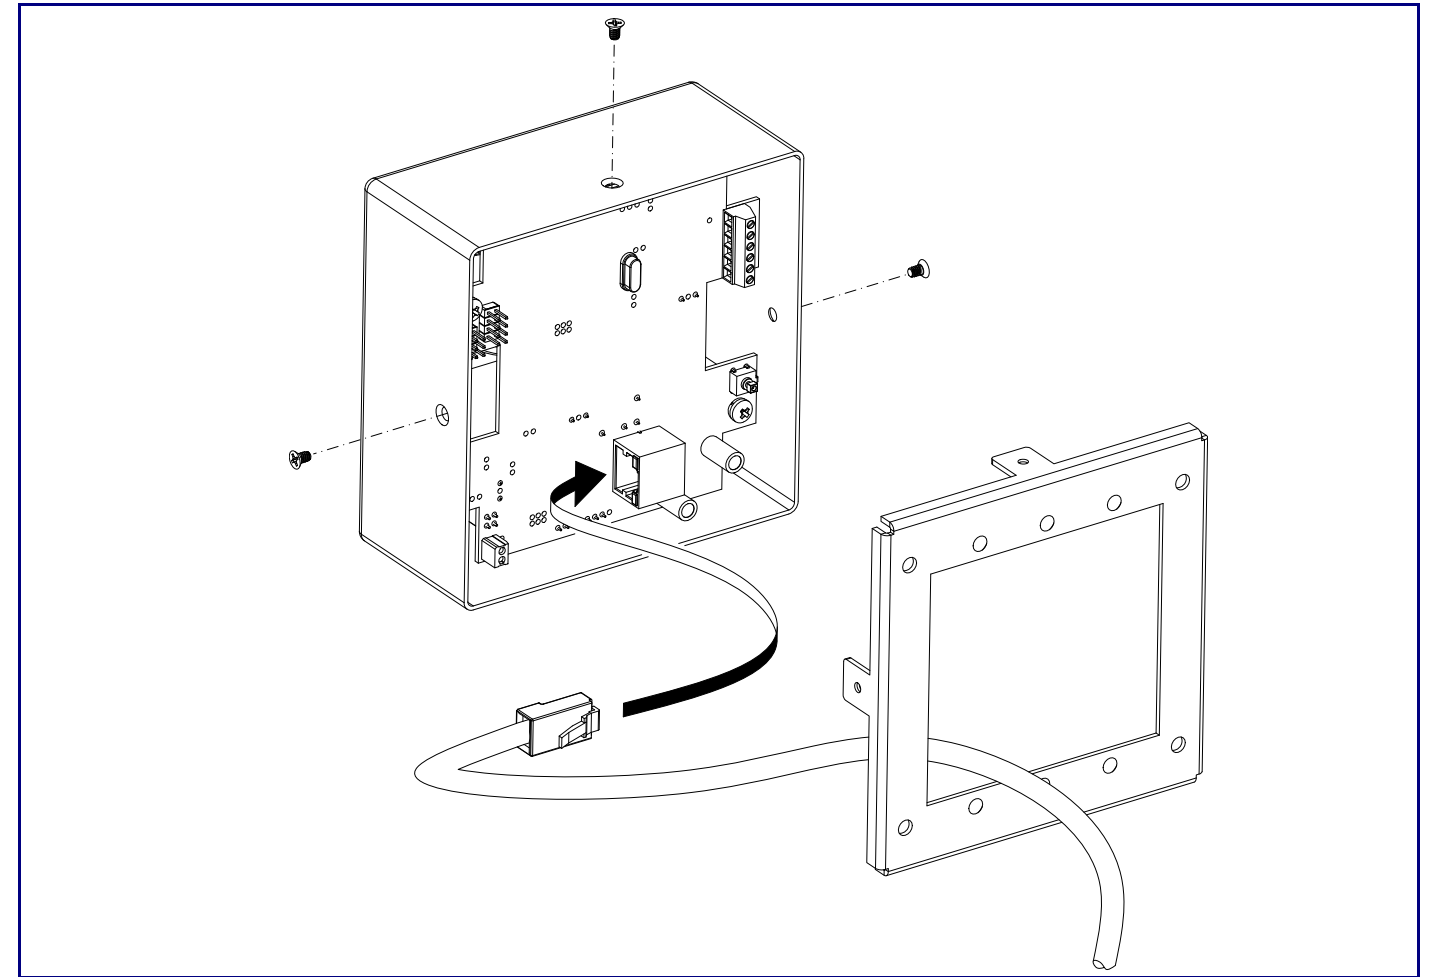
(1) Office Ringer	**(1) Wall Mounting Kit**		**(1) Gang Box Mounting Kit**
	(4) #6 x 1" Pan head phillips wood screw	(4) Plastic ribbed anchor	(4) 6-32 x 0.5-inch flat undercut Phillips machine screw

Dimensions

4.53 [115.0]

2.22 [56.3]

4.53 [115.0]

DIMENSIONS ARE IN INCHES [MILLIMETER]

Terminal Block Connections

Accepts 16 AWG gauge wire

J3 - Terminal Block

1 2 3 4 5 6

Alternate Power Input:
1 = +5V at 1000 mA
2 = Power Ground

3   4

Relay Contact:
(1A at 30 VDC for continuous loads)
3 = Normally Open Common
4 = Normally Open Contact
5 = Sense Input
6 = Sense Ground Reference

Cable Connections

Gang Box Mounting Options

SINGLE
GANG BOX
(Not Provided)

DRYWALL
CUTOUT

TWO
GANG BOX
(Not Provided)

EARTH GROUND
HERE

DRYWALL
CUTOUT

EARTH GROUND
CABLE

EARTH GROUND
CABLE

MOUNTING SCREW
(4 PIECES PROVIDED)

EARTH GROUND
HERE