

# SIP Strobe

Now supporting voice mailbox *Message Waiting Indication*

When installed, the wall-mounted SIP Strobe operates as a visual alerting device. The device can be set up as part of a ring group (call group) with the Strobe engaged as notification of incoming calls.

The SIP Strobe may also be activated by being part of a Multicast group. When audio is detected on a specific Multicast address and port, the strobe will activate.

Through a web page setup, you can have the SIP Strobe respond to message waiting signals by blinking. When the message has been heard, the strobe stops blinking.

Users may also use CyberData's HTTP command set to directly access the strobe's functions.

## Features

- Meets ADA requirements for telephony signaling and notification
- Program or listen to up to 10 multicast addresses
- SIP activation
- Mailbox Message Waiting Indication
- Multicast activation
- Cisco SRST support
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered

## Use areas include:


- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only



## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +12 to 24 VDC at 1000 mA (500 mA minimum)
Light power	90 candela (5-Watt LEDs)
Flash rate	2 per second
LED MTBF	100,000 Hours
Operating Temperature	-30 to 55 C (-22 to 131 F)
Dimensions	5" x 5" x 1.5" (H x W x D)
Warranty	2 years limited
Part Number	011087

# SIP Strobe

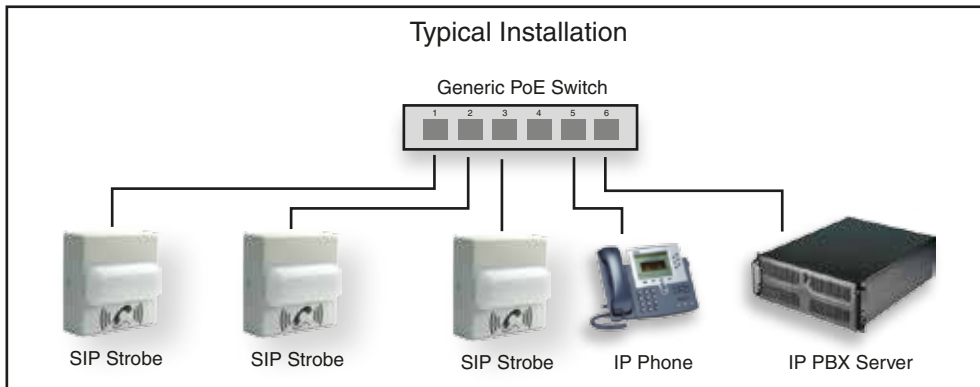

## Mounting Options

