



# Singlewire InformaCast Talk-Back Speaker SIP Compliant

011399\*, RAL 9002, Gray White, Standard 011400\*, RAL 9003, Signal White, Optional


\*Replaces the 011182 and 011183 numbers.



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address <sup>a</sup>	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask <sup>a</sup>	255.0.0.0
Default Gateway <sup>a</sup>	10.0.0.1

a. Default if there is not a DHCP server present.

### Typical System Installation

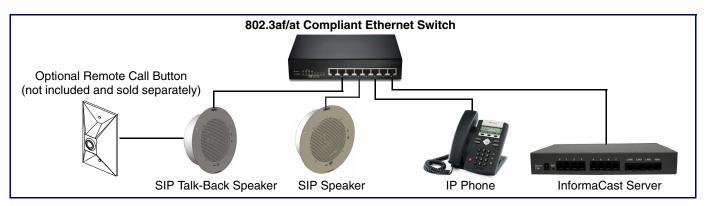


#### Getting Started

- Download the Operations Guide PDF file, from the **Downloads** tab at the following webpage: https://www.cyberdata.net/products/011399-011400
- Create a plan for the locations of your Singlewire InformaCast Talk-Back Speakers.
- WARNING: This product should be installed by a licensed electrician according to all local electrical and building codes.
- WARNING: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation instructions.
- . WARNING: The PoE connector is intended for intra-building connections only and does not route to the outside plant.
- WARNING: This enclosure is not rated for any AC voltages!

#### **Parts**




#### **Dimensions and Connections**

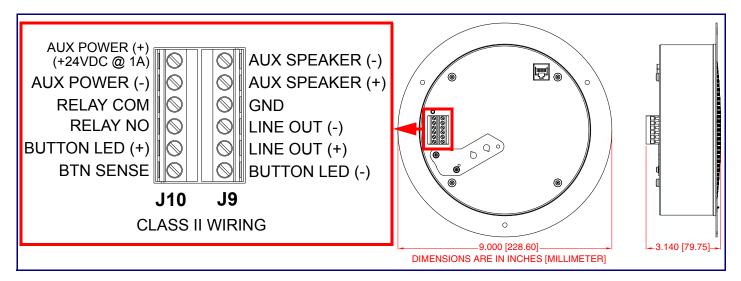


### Connecting Power




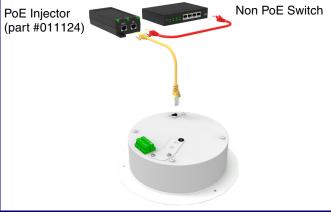

#### **Features**

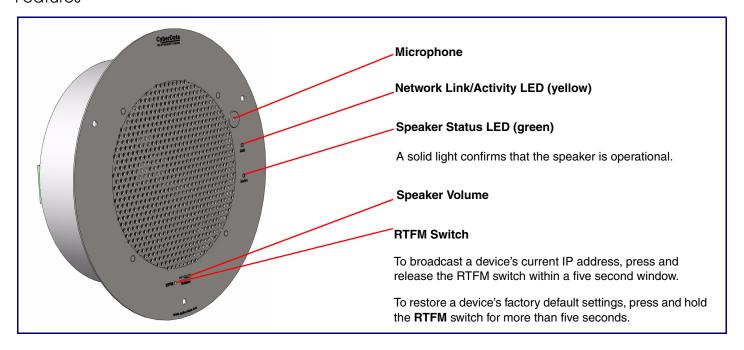

#### Mounting

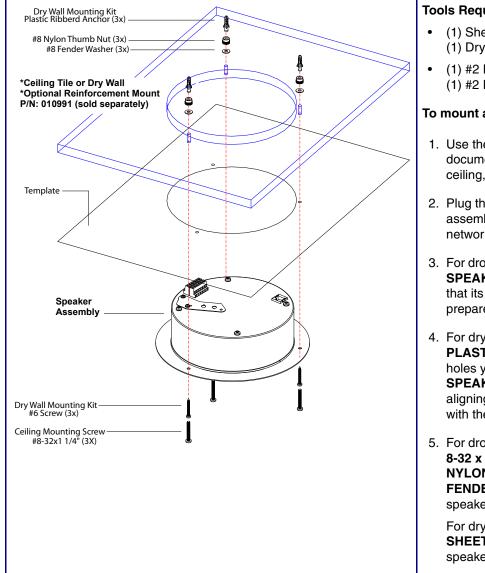

#### **Tools Required for Installation:**

- (1) Sheetrock saw or
- (1) Drywall cutter
- (1) #2 Phillips Screwdriver or
- (1) #2 Phillips Screwdriver Hex Bit

#### To mount a speaker:

- 1. Use the **TEMPLATE** on the back of this document to cut a hole in the wall or ceiling, and prepare holes for the screws.
- 2. Plug the Ethernet cable into the speaker assembly. The yellow light verifies the network connection.
- 3. For drop ceiling mounting, position the IP SPEAKER ASSEMBLY in the ceiling so that its screw holes align with those you prepared.
- 4. For drywall mounting, place the three **PLASTIC RIBBED ANCHORS** in the holes you prepared, and position the IP SPEAKER ASSEMBLY over them, aligning the screw holes in the assembly with the anchors.
- 5. For drop ceiling mounting\*, use the three 8-32 x 1 1/4" MOUNTING SCREWS, #8 NYLON THUMB NUTS, and #8 FENDER WASHERS to secure the speaker.

For drywall mounting, use the three #8 SHEET METAL SCREWS to secure the speaker.

\* For weak ceiling tile, CyberData offers a reinforcing mount (CyberData part number 010991).

## Contacting CyberData

#### Corporate Headquarters

CyberData Corporation 3 Justin Court

Monterey, CA 93940, USA

Phone: 831-373-2601 Fax: 831-373-4193 http://www.cyberdata.net/

Quick Reference

Sales: (831) 373-2601 ext. 334 Support: 831-373-2601 ext. 333

Support Website: <a href="http://support.cyberdata.net/">http://support.cyberdata.net/</a> RMA Department: (831) 373-2601 ext. 136 RMA Email: RMA@CyberData.net

RMA Status: http://support.cyberdata.net/ Warranty Information: http://support.cyberdata.net/