

Auxiliary Analog Speaker

CyberData

The IP Endpoint Company


When paired with any CyberData SIP or InformaCast Enabled Speaker, the Auxiliary Analog Speaker will extend the sound coverage area without increasing the total speaker wattage.

The Auxiliary Analog Speaker can be installed with the same mounting hardware options available for the CyberData Speakers.



Related Products

Speakers



011394 SIP Speaker with Talk-Back

011396 InformaCast Enabled Speaker with Talk-Back

Specifications

Power Input	15 watts at 8 Ohm
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	9.055 in. [230 mm] Grill Diameter 7.25 in. [184.2 mm] Can Diameter 3.08 in. [76.11 mm] Depth
Weight	3.0 lbs [1.36 kg]
Boxed Weight	4.0 lbs. [1.81 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive EN 62368-1; RoHS Compliant; FCC Part 15 Class; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	2 Year Limited
Part Number	011121

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Mounting Hardware



010991 Ceiling Mount




011039 Conduit Speaker Mount



011152 Speaker
Wall Mount

Auxiliary Analog Speaker

Connections

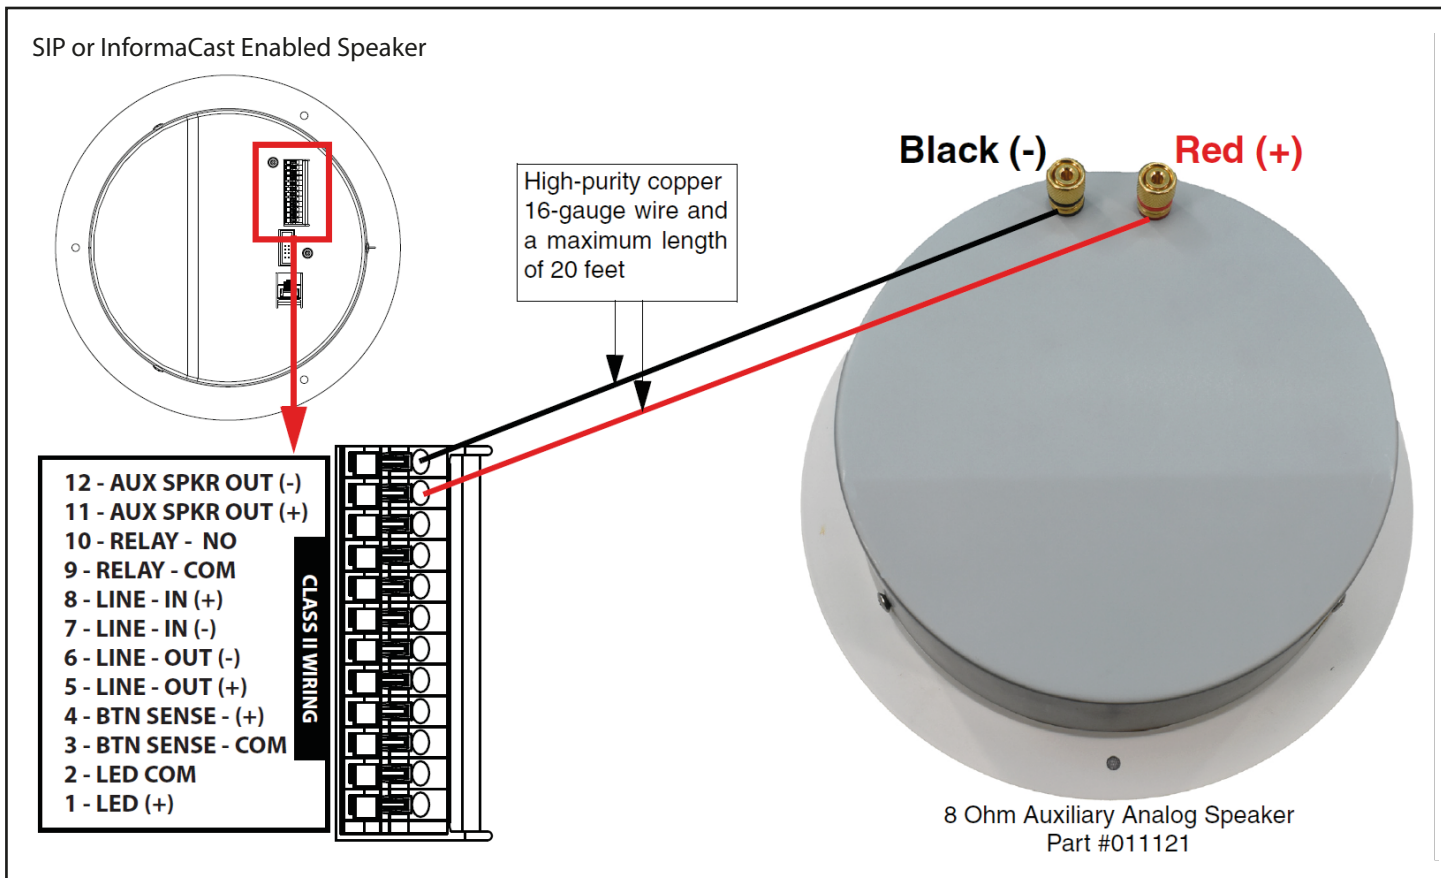

Dimensions

