

Singlewire-enabled Push-to-Talk V2 Ceiling Speaker

011182, RAL 9002, Gray White, Standard
011183, RAL 9003, Signal White, Optional


The Singlewire-enabled Push-to-Talk V2 Ceiling Speaker is compatible with InformaCast Version 8.1 and higher.



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.

Typical System Installation

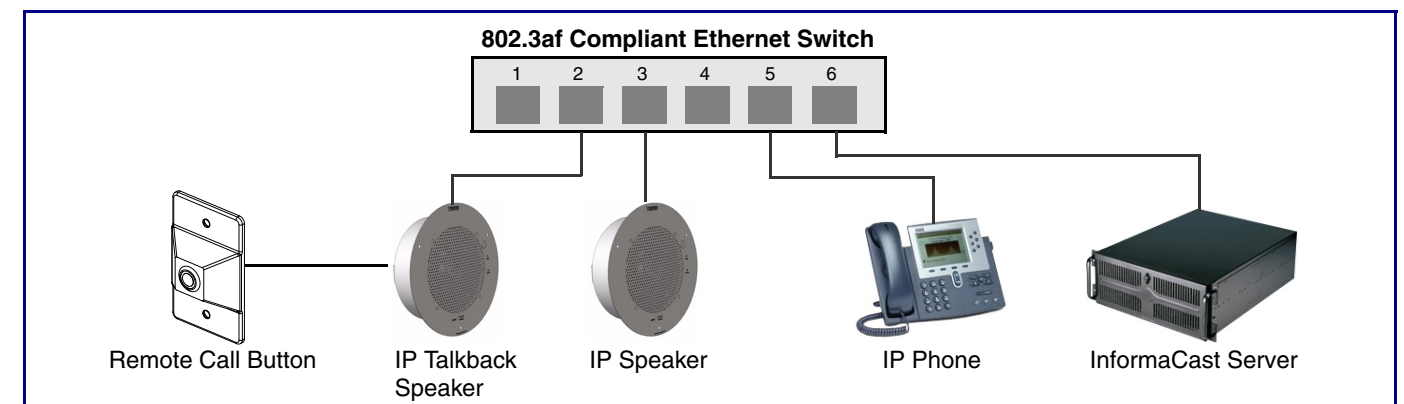


Getting Started

- Download the *Singlewire-enabled Push-to-Talk V2 Ceiling Speaker Operations Guide* PDF file from the **Documentation** page at:
<http://www.cyberdata.net/products/voip/digitalanalog/singlewirespeakerptt/docs.html>
- Create a plan for the locations of your speakers.
- Prior to installation, consult local building and electrical code requirements.


Parts

(1) Speaker Assembly	(1) Template for Speaker and Screw Holes*	(1) Drop Ceiling Mounting Kit	(1) Drywall Mounting Kit
		(3) #8 Nylon Thumb Nuts	(3) Plastic Ribbed Anchors
		(3) #8 Fender Washers	(3) #8 Sheet Metal Screws
		(3) 8-32 x 1 1/4" Mounting Screws	


* See the last page of this document

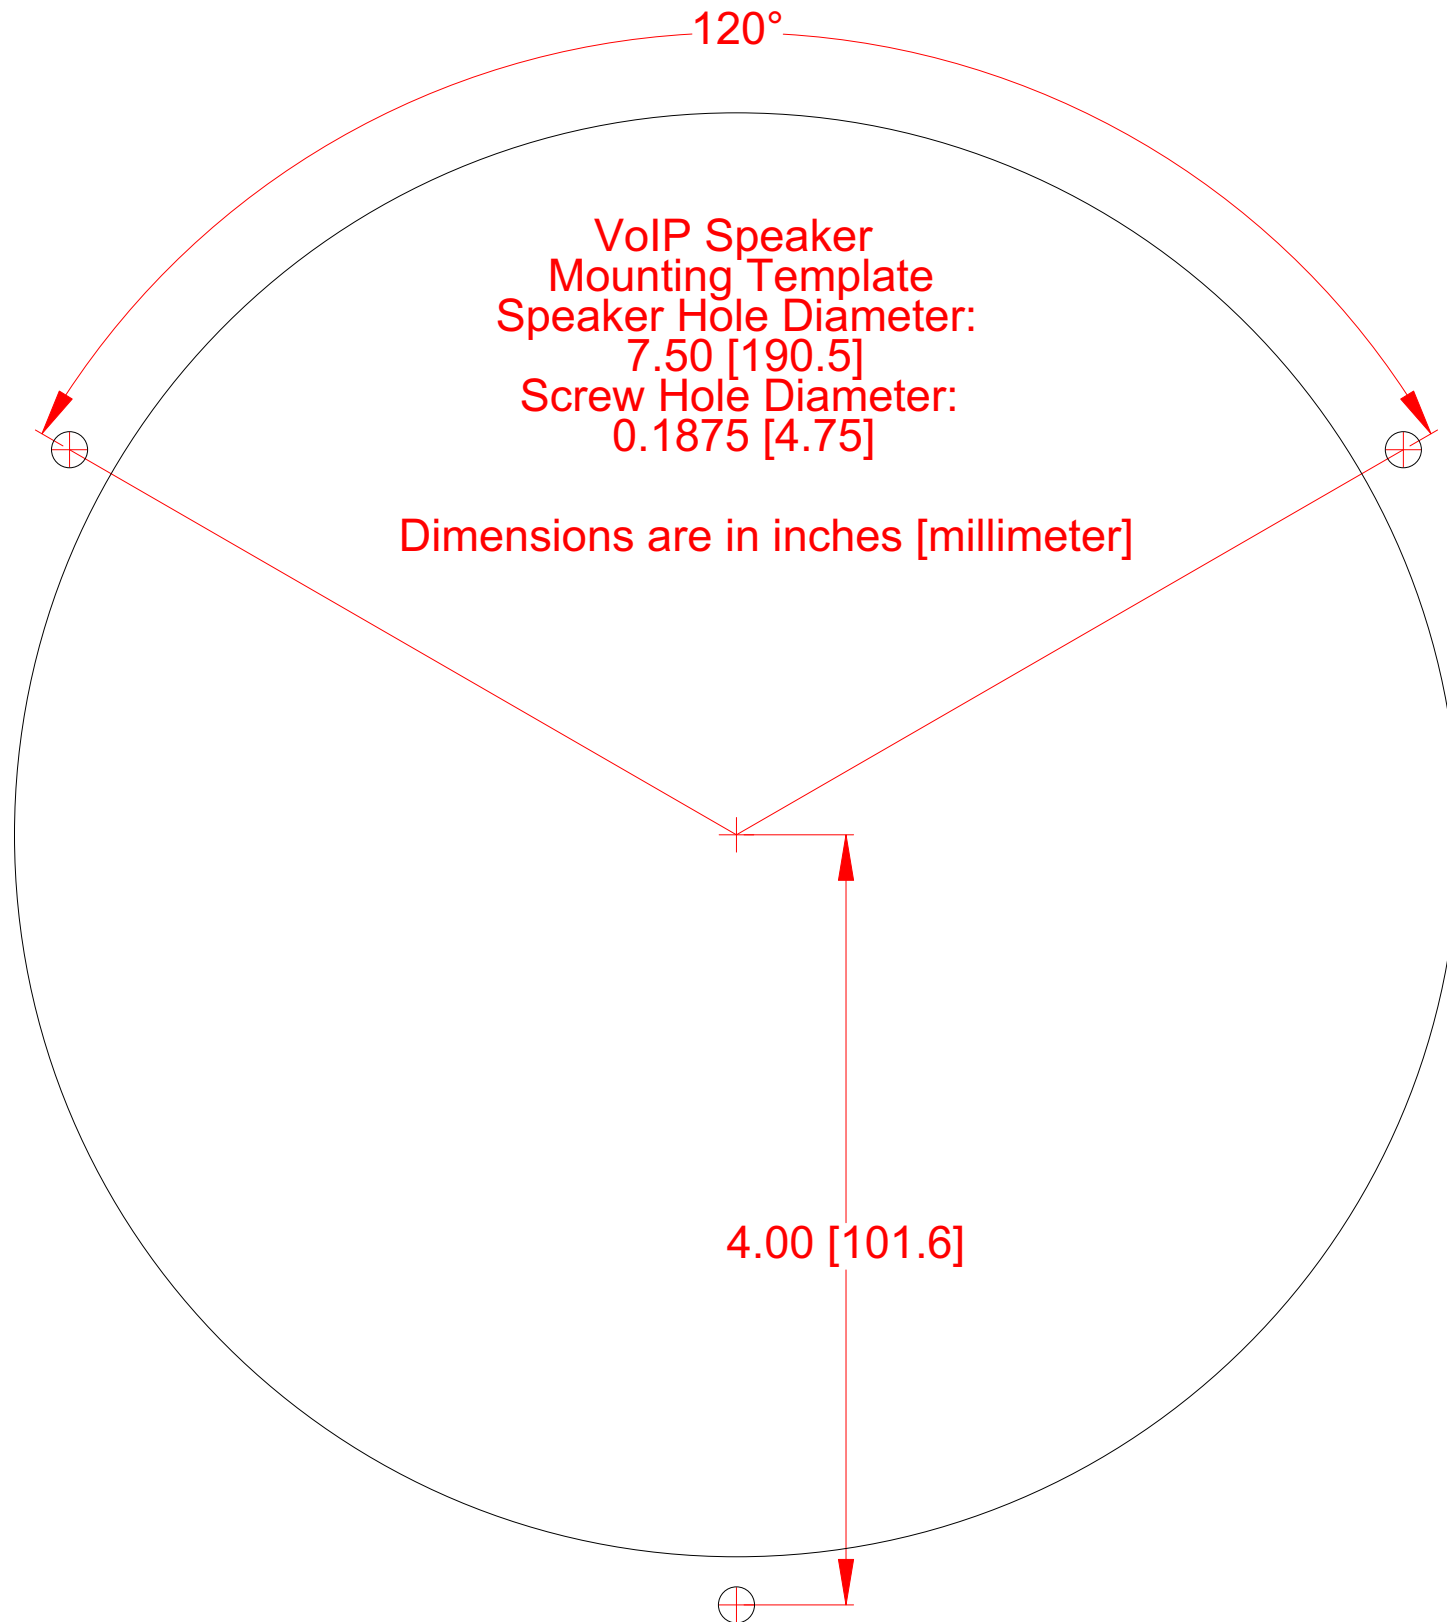


Dimensions and Connections

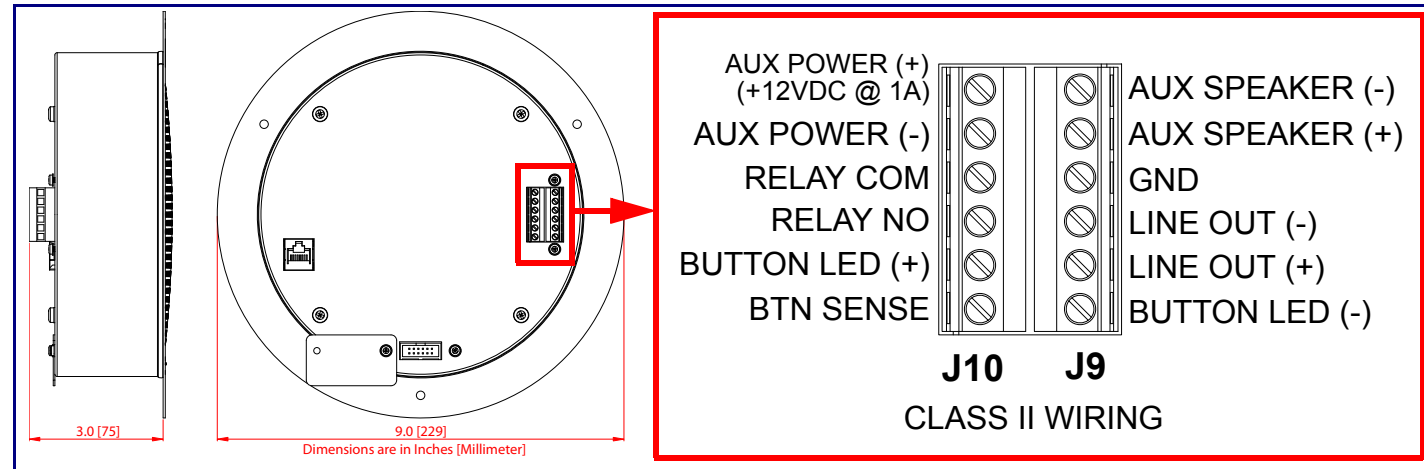


Connecting Power

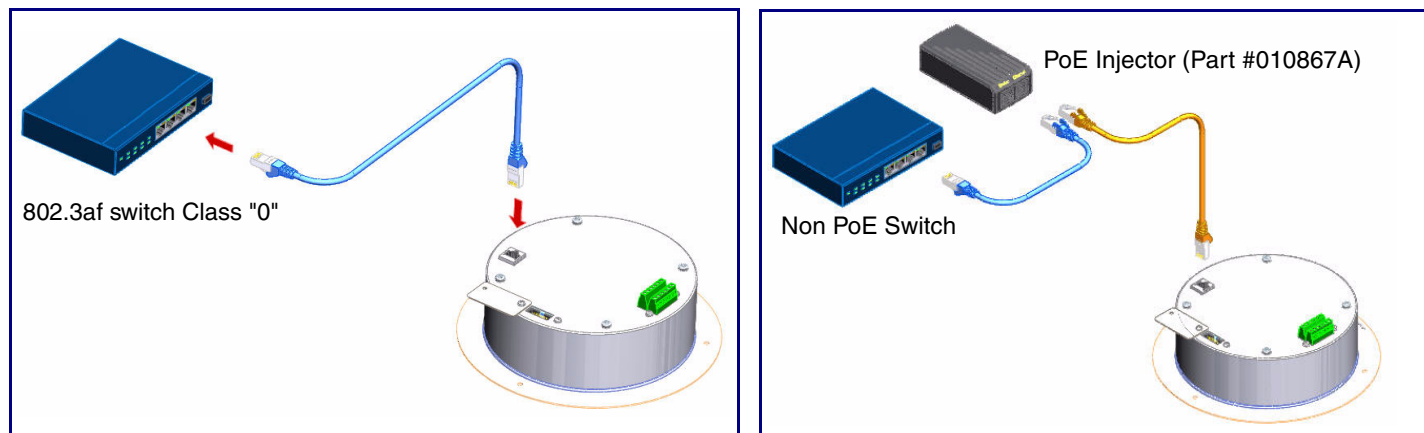

Features

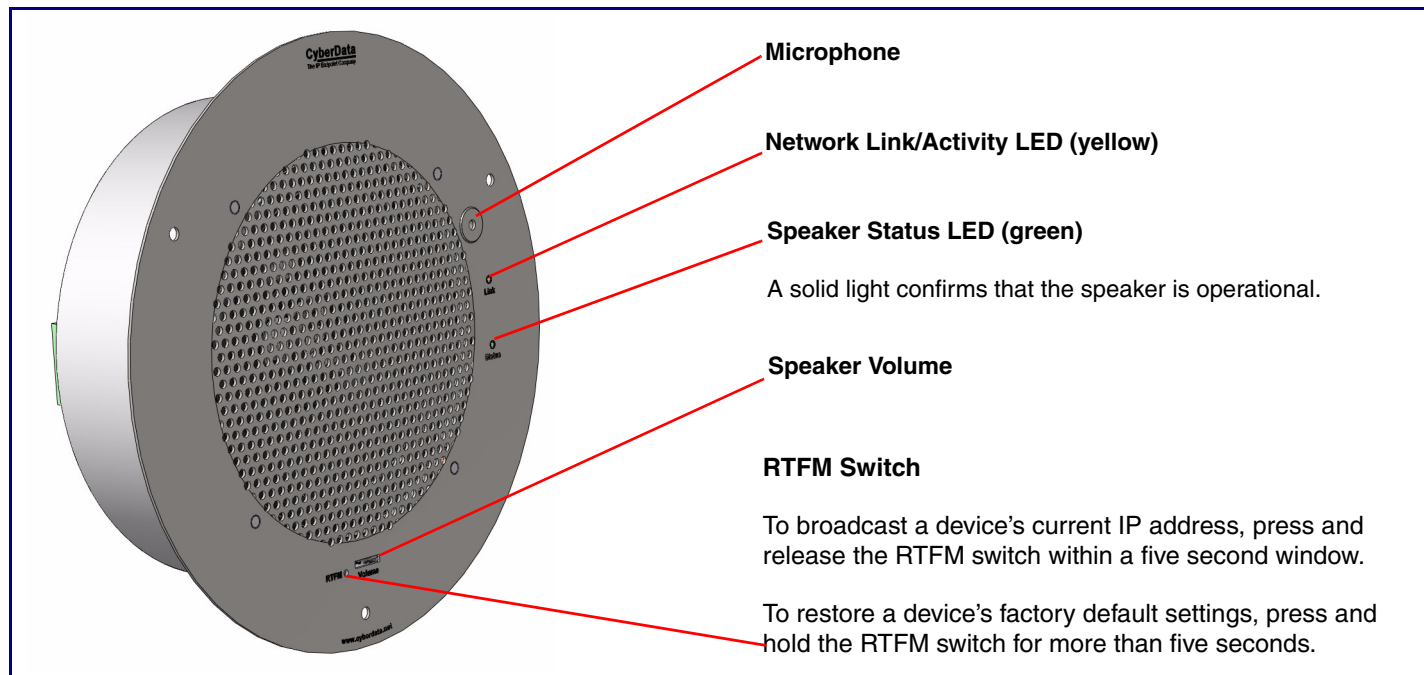

Mounting

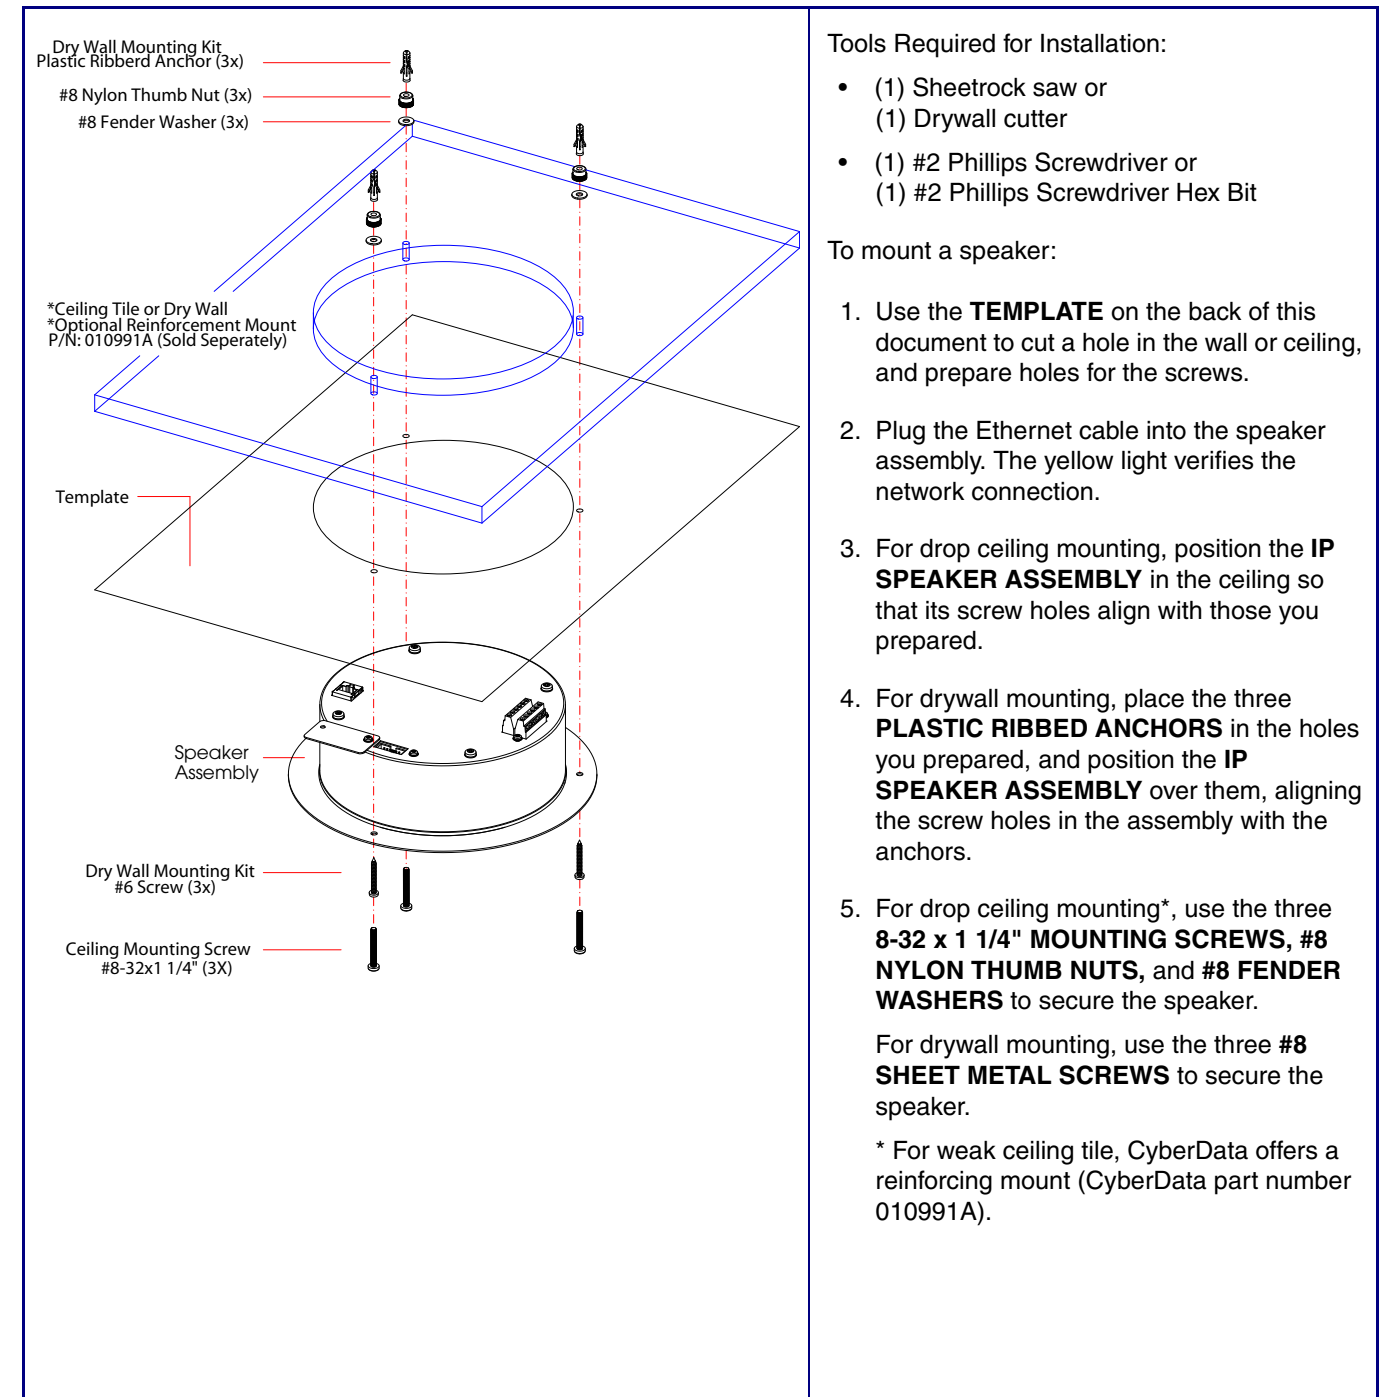

Contacting CyberData

