# Singlewire Informacast/Berbee-enabled VoIP Talkback Ceiling Speaker Push-to-Talk Applications



The CyberData Singlewire-enabled Talkback speaker enables two-way conversations using the Singlewire Push-to-Talk application running on the phone. The Talkback speaker easily connects into local area networks with a single CAT5/6 cable from your PoE switch. Its small footprint allows the speaker to be mounted almost anywhere with multiple mounting options available.

By use of the optional remote call button, calls to a predetermined extension can be initiated from the room with the speaker. During the active calls, the LED light on the switch can be programmed to blink to show call activity.

#### **Features**

- Push-to-Talk
- Informacast-controlled operation
- Web-based configuration
- Web-based firmware upgradeable
- Small footprint
- High efficiency speaker driver
- PoE 802.3af Enabled (Powered-over-Ethernet)
- Network and external speaker volume control
- Optional external call button and LED indicator




Optional remote call button: 011184, RAL 9002 011185, RAL 9003


Specifications	
Sensitivity	96dB / 1W / 1M S.P. Level
Output	10 Watts Peak Power
Ethernet I/F	10/100 Mbps
Protocol	Informacast
Power Input	PoE 802.3af
Operating Temperature	-30 to 55 C (-22 to 131 F)
Payload Types	G711, A-law and μ-law
Dimensions	9" x 2.4"
Warranty	2 years limited
Part Number	011182, RAL 9002 011183, RAL 9003



## Singlewire Informacast/Berbee-enabled VoIP Talkback Ceiling Speaker For Singlewire Push-to-Talk Applications

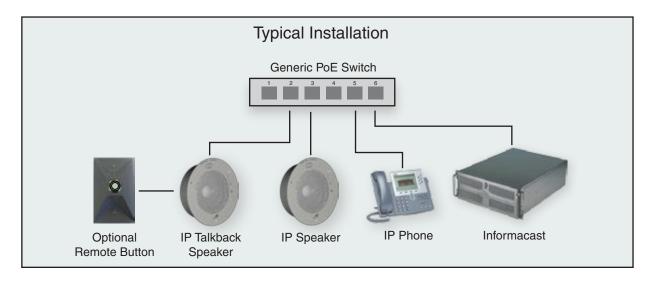

### Talkback Speaker with Optional Remote Call Button

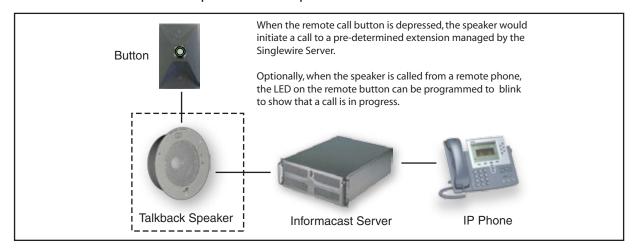

### **Mounting Options**

