



Singlewire/SIP Paging Adapter Operations Guide

Part #011280B

Document Part #931121C
for Firmware Version 11.5.5

CyberData Corporation
3 Justin Court
Monterey, CA 93940
(831) 373-2601

Singlewire/SIP Paging Adapter Operations Guide 931121C
Part #011280B

COPYRIGHT NOTICE:

© 2016, CyberData Corporation, ALL RIGHTS RESERVED.

This manual and related materials are the copyrighted property of CyberData Corporation. No part of this manual or related materials may be reproduced or transmitted, in any form or by any means (except for internal use by licensed customers), without prior express written permission of CyberData Corporation. This manual, and the products, software, firmware, and/or hardware described in this manual are the property of CyberData Corporation, provided under the terms of an agreement between CyberData Corporation and recipient of this manual, and their use is subject to that agreement and its terms.

DISCLAIMER: Except as expressly and specifically stated in a written agreement executed by CyberData Corporation, CyberData Corporation makes no representation or warranty, express or implied, including any warranty or merchantability or fitness for any purpose, with respect to this manual or the products, software, firmware, and/or hardware described herein, and CyberData Corporation assumes no liability for damages or claims resulting from any use of this manual or such products, software, firmware, and/or hardware. CyberData Corporation reserves the right to make changes, without notice, to this manual and to any such product, software, firmware, and/or hardware.

OPEN SOURCE STATEMENT: Certain software components included in CyberData products are subject to the GNU General Public License (GPL) and Lesser GNU General Public License (LGPL) "open source" or "free software" licenses. Some of this Open Source Software may be owned by third parties. Open Source Software is not subject to the terms and conditions of the CyberData COPYRIGHT NOTICE or software licenses. Your right to copy, modify, and distribute any Open Source Software is determined by the terms of the GPL, LGPL, or third party, according to who licenses that software.

Software or firmware developed by Cyberdata that is unrelated to Open Source Software is copyrighted by CyberData, subject to the terms of CyberData licenses, and may not be copied, modified, reverse-engineered, or otherwise altered without explicit written permission from CyberData Corporation.

TRADEMARK NOTICE: CyberData Corporation and the CyberData Corporation logos are trademarks of CyberData Corporation. Other product names, trademarks, and service marks may be the trademarks or registered trademarks of their respective owners.



Technical Support

The fastest way to get technical support for your VoIP product is to submit a VoIP Technical Support form at the following website:
<http://support.cyberdata.net/>

Phone: (831) 373-2601, Ext. 333

Email: support@cyberdata.net

Fax: (831) 373-4193

Company and product information is at www.cyberdata.net.

Revision Information

Revision 931121C, which corresponds to firmware version 11.5.5, was released on February 9, 2016, and has the following changes:



- Updates [Table 2-13, "SIP Configuration Parameters"](#)

Browsers Supported

The following browsers have been tested against firmware version 11.5.5:

- Internet Explorer (version: 10)
- Firefox (also called Mozilla Firefox) (version: 22.0)
- Chrome (version: 27.0.1453.116)
- Safari (version: 6.0.5)

Pictorial Alert Icons

	<p>General Alert</p> <p><i>This pictorial alert indicates a potentially hazardous situation. This alert will be followed by a hazard level heading and more specific information about the hazard.</i></p>
	<p>Ground</p> <p><i>This pictorial alert indicates the Earth grounding connection point.</i></p>

Hazard Levels

Danger: Indicates an imminently hazardous situation which, if not avoided, will result in death or serious injury. This is limited to the most extreme situations.

Warning: Indicates a potentially hazardous situation which, if not avoided, could result in death or serious injury.

Caution: Indicates a potentially hazardous situation which, if not avoided, could result in minor or moderate injury. It may also alert users against unsafe practices.

Notice: Indicates a statement of company policy (that is, a safety policy or protection of property).

The safety guidelines for the equipment in this manual do not purport to address all the safety issues of the equipment. It is the responsibility of the user to establish appropriate safety, ergonomic, and health practices and determine the applicability of regulatory limitations prior to use. Potential safety hazards are identified in this manual through the use of words Danger, Warning, and Caution, the specific hazard type, and pictorial alert icons.

Important Safety Instructions

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.
13. Prior to installation, consult local building and electrical code requirements.



Warning

Electrical Hazard: This product should be installed by a licensed electrician according to all local electrical and building codes.



Warning

Electrical Hazard: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation instructions.



Warning

The PoE connector is intended for intra-building connections only and does not route to the outside plant.

Abbreviations and Terms

Abbreviation or Term	Definition
A-law	A standard companding algorithm, used in European digital communications systems to optimize, i.e., modify, the dynamic range of an analog signal for digitizing.
AVP	Audio Video Profile
Cat 5	TIA/EIA-568-B Category 5
DHCP	Dynamic Host Configuration Protocol
LAN	Local Area Network
LED	Light Emitting Diode
Mbps	Megabits per Second.
NTP	Network Time Protocol
PBX	Private Branch Exchange
PoE	Power over Ethernet (as per IEEE 802.3af standard)
RTFM	Reset Test Function Management
SIP	Session Initiated Protocol
u-law	A companding algorithm, primarily used in the digital telecommunication
UC	Unified Communications
VoIP	Voice over Internet Protocol

Contents

Chapter 1 Product Overview	1
1.1 How to Identify This Product	1
1.2 Product features	2
1.3 Product Specifications	3
1.4 Dimensions	4
 Chapter 2 Installing the Singlewire/SIP Paging Adapter	 5
2.1 Parts List	5
2.2 Typical Installation	6
2.3 Connecting the Singlewire/SIP Paging Adapter	7
2.3.1 Ground Connection	7
2.3.2 Line In	7
2.3.3 Line Out	7
2.3.4 Page Port Output Connections	8
2.3.5 Removable Interface Connector	9
2.3.6 Connect to the Power Source	10
2.3.7 Connect to the Network	11
2.3.8 Confirm that the Singlewire/SIP Paging Adapter is Up and Running	12
2.3.9 Announcing the IP Address	13
2.3.10 Restore the Factory Default Settings	14
2.4 Configure the Device Parameters	15
2.4.1 Singlewire/SIP Paging Adapter Web Page Navigation	16
2.4.2 Using the Toggle Help Button	17
2.4.3 Log in to the Configuration GUI	19
2.4.4 Configure the Device Parameters	23
2.4.5 Configure the Network Parameters	29
2.4.6 Configure the SIP Parameters	32
2.4.7 Configure the Multicast Parameters	38
2.4.8 Configure the Fault Detection Parameters	43
2.4.9 Configure the Audio Parameters	45
2.4.10 Configure the Event Parameters	53
2.4.11 Configure the Autoprovisioning Parameters	58
2.5 Upgrading the Firmware	70
2.5.1 Upgrade the Firmware	70
2.5.2 Reboot the Singlewire/SIP Paging Adapter	72
2.6.1 Command Interface Post Commands	73
2.7 Identifying and Testing a Device when Using InformaCast 4.0 or Later	80
 Appendix A Setting up a TFTP Server	 86
A.1 In a LINUX Environment	86
A.2 In a Windows Environment	86
 Appendix B Troubleshooting/Technical Support	 87
B.1 Frequently Asked Questions (FAQ)	87
B.2 Documentation	87
B.3 Contact Information	88
B.4 Warranty and RMA Information	88
 Index	 89

1 Product Overview

The CyberData Singlewire/SIP Paging Adapter is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK.

The Singlewire/SIP Paging Adapter provides a direct connection to legacy analog paging systems enabling Informacast paging events to be broadcast.


The on board relay can be controlled using InformaCast GPIO commands or can be set to activate when a page has begun.

1.1 How to Identify This Product

To identify the Singlewire/SIP Paging Adapter, look for a model number label similar to the one shown in [Figure 1-1](#). Confirm the following:

- The model number on the label should be **011280B**.
- The serial number on the label should begin with **2801**.

Figure 1-1. Model Number Label

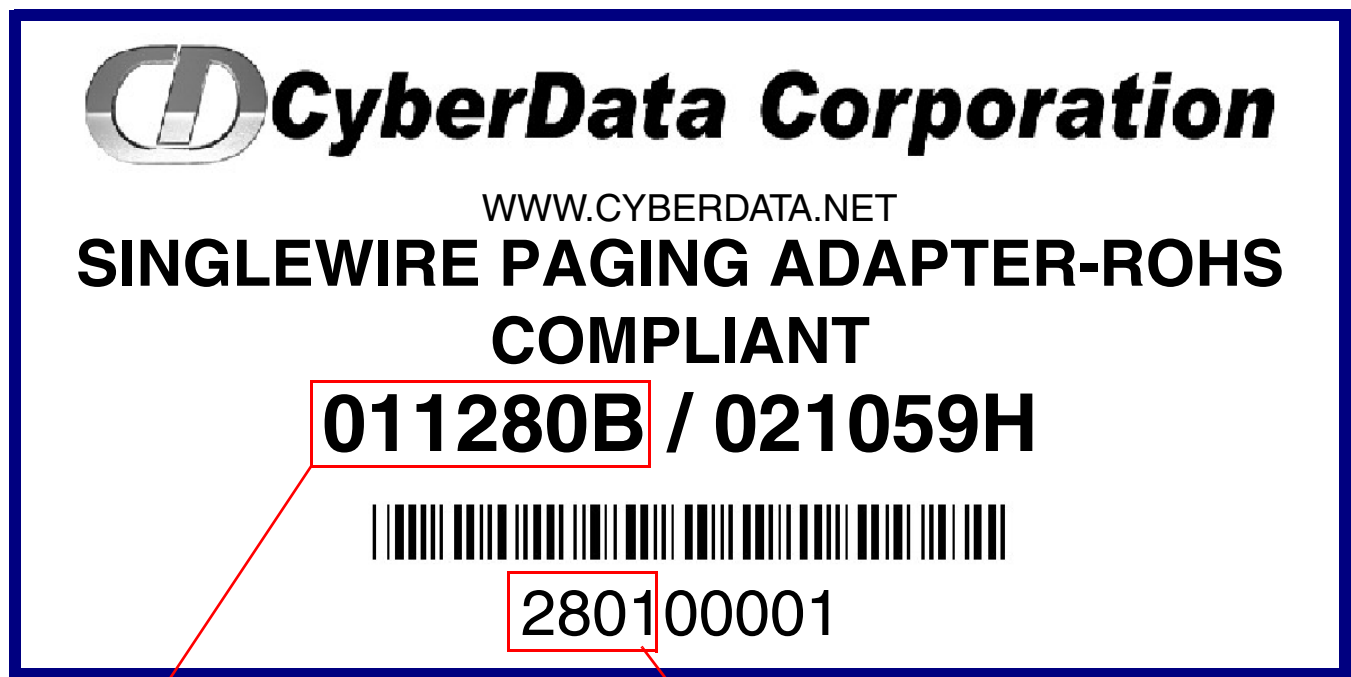

Model number

Serial number begins with **2801**

1.2 Product features

- InformaCast
- 10k Ohm line out and 600 Ohm connectors for interfacing with analog amplifiers
- Audio Codecs
 - G.711 U-law
 - G.711 A-law
 - Singlewire's proprietary "high quality" audio format.
- 802.11Q VLAN support
- Web-based configuration and firmware upload
- PoE 802.3af enabled (Power-over-Ethernet)
- 19-inch rack mount option

1.3 Product Specifications


Table 1-1. Product Specifications

Specifications	
Protocol	Informacast 4.0 or later
Power Requirement	PoE or 48V DC
Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3af or 48VDC
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Payload Types	G711 Singlewire proprietary 'high quality' audio format
Page Port Output	Balanced 600 Ohm 5VPP
Line In:	
Input Signal Amplitudes	2.0 VPP maximum
Input Impedance	10k Ohm
Line Out:	
Output Signal Amplitudes	2.0 VPP maximum
Output Level	+2dBm nominal
Total Harmonic Distortion	0.5% maximum
Output Impedance	10k Ohm
Dimensions	6.11" L x 4.05" W x 1.15" H
Weight	1.2 pounds
Boxed Weight	1.8 pounds
Part Number	011280B

1.4 Dimensions

Figure 1-2 shows the dimensions for the Singlewire/SIP Paging Adapter.

Figure 1-2. Dimensions

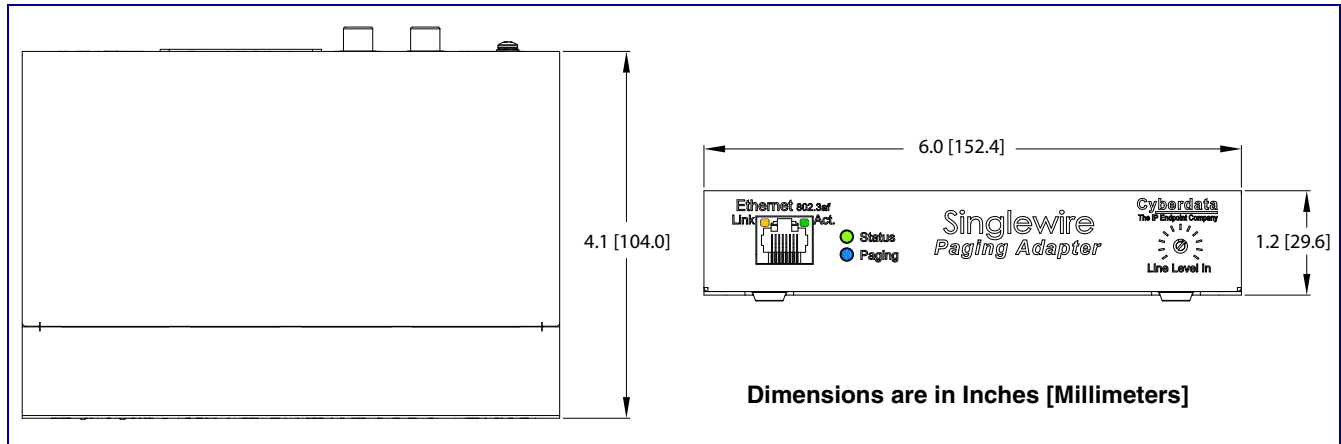





2 Installing the Singlewire/SIP Paging Adapter

2.1 Parts List

The packaging for the Singlewire/SIP Paging Adapter includes the parts in [Table 2-2](#).


Table 2-2. Parts List

Quantity	Part Name	Illustration
1	Singlewire/SIP Paging Adapter	
1	Installation Quick Reference Guide	
1	Mounting Template (located on the last page of the <i>Installation Quick Reference</i>)	
1	Mounting Kit (part #070057A) which includes: (2) #4-6 x 7/8" Mounting Anchors (2) #4 x 1-1/4" Round Phillips Wood Screws	

2.2 Typical Installation

Figure 2-3 illustrates how the Singlewire/SIP Paging Adapter is normally installed as part of a paging system.

Figure 2-3. Typical Installation

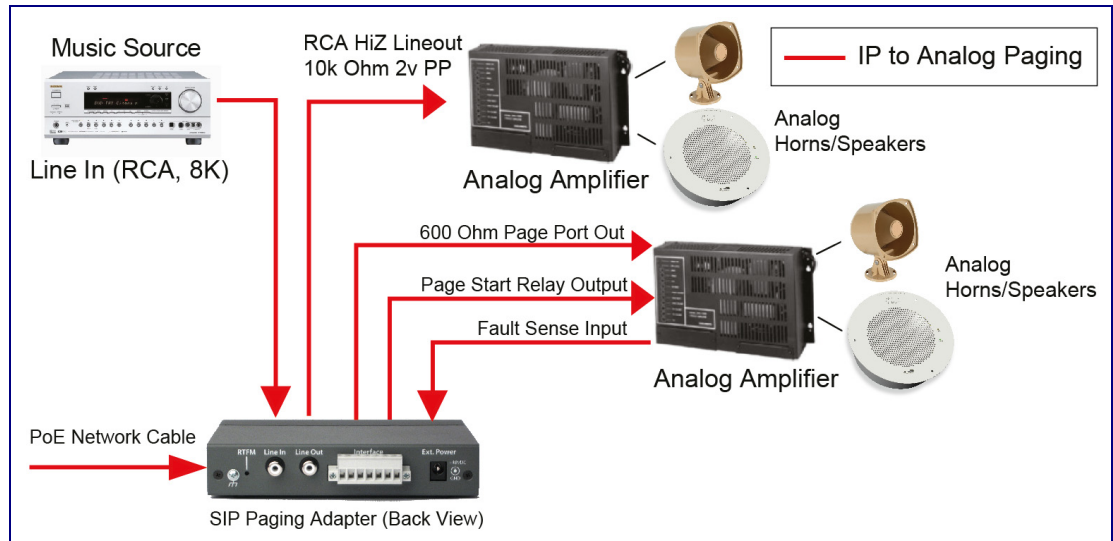


2.3 Connecting the Singlewire/SIP Paging Adapter

Before you connect the Singlewire/SIP Paging Adapter, be sure that you have received all of the parts described in [Section 2.1, "Parts List"](#).

See [Figure 2-4](#) for the connection options that are available for the Singlewire/SIP Paging Adapter.

Figure 2-4. Connection Options

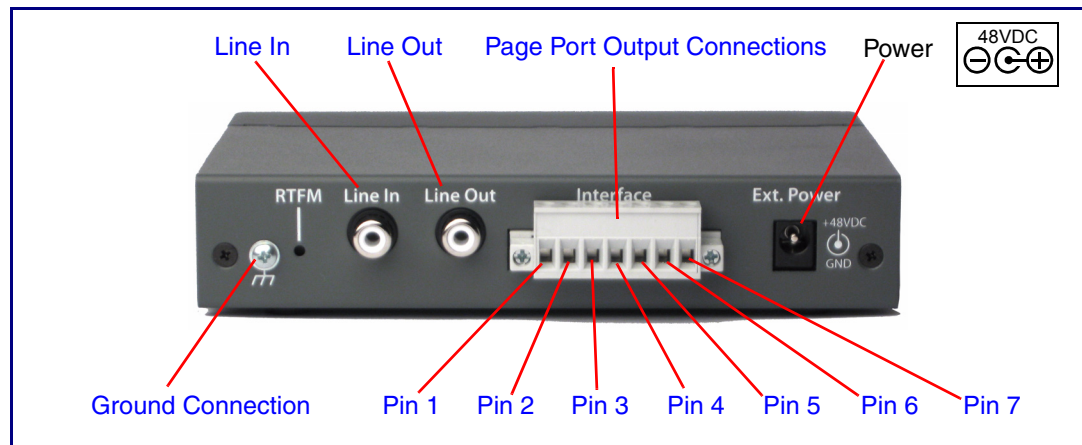

2.3.1 Ground Connection

This connection allows you to connect the device to an electrical ground.

2.3.2 Line In

This RCA 10K Ohm Hi-Z input connection allows you to connect the device to The RCA line-out (10K Ohm Hi-Z) of an external audio amplifier. The level of this input can be controlled by the potentiometer located on the front of the device (see [Section 2.4.8, "Configure the Fault Detection Parameters"](#)).

2.3.3 Line Out

This RCA 10K Ohm Hi-Z output connection allows you to connect the device to The RCA line-in (10K Ohm Hi-Z) of an external audio amplifier.

2.3.4 Page Port Output Connections

Table 2-1. Page Port Output Connections

Pin	Description
Pin 1	Fault Sense Input (Common). See Section 2.3.4.1, "Pin 1 and 2—Fault Sense Input (Common/Sense)" .
Pin 2	Fault Sense Input (Sense). See Section 2.3.4.1, "Pin 1 and 2—Fault Sense Input (Common/Sense)" .
Pin 3	Positive 600-Ohm Audio Output ^a . See Section 2.3.4.2, "Pin 3, 4, and 5—Positive/Negative 600-Ohm Audio Output/Audio Ground Reference" .
Pin 4	Negative 600-Ohm Audio Output ^a . See Section 2.3.4.2, "Pin 3, 4, and 5—Positive/Negative 600-Ohm Audio Output/Audio Ground Reference" .
Pin 5	Audio Ground Reference. See Section 2.3.4.2, "Pin 3, 4, and 5—Positive/Negative 600-Ohm Audio Output/Audio Ground Reference" .
Pin 6	Relay Contact - Common ^b . See Section 2.3.4.3, "Pin 6 and 7—Relay Contact (Common/Normally Open)" .
Pin 7	Relay Contact - Normally Open ^b . See Section 2.3.4.3, "Pin 6 and 7—Relay Contact (Common/Normally Open)" .

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads

2.3.4.1 Pin 1 and 2—Fault Sense Input (Common/Sense)

This input was designed as a method of monitoring an external amplifier that is equipped with a fault sense relay.

When enabled via the web interface ([Section 2.4.8, "Configure the Fault Detection Parameters"](#)), this input (when closed) will play a user uploadable audio file out of the line-out connection and/or place a SIP call to a pre-determined extension and play that file.

2.3.4.2 Pin 3, 4, and 5—Positive/Negative 600-Ohm Audio Output/Audio Ground Reference

This output allows direct connection to paging amplifiers requiring a "Page Port" type input that meets a balanced 600 Ohm 5VPP signal.


2.3.4.3 Pin 6 and 7—Relay Contact (Common/Normally Open)

When enabled on the web interface ([Section 2.4.4, "Configure the Device Parameters"](#)), every time an audio file is played out of the local line-out or 600 Ohm output, the relay will close, thereby enabling amplifiers with a remote turn-on capability to become active.

2.3.5 Removable Interface Connector

Figure 2-5 shows the interface connector that is removable on the Singlewire/SIP Paging Adapter.

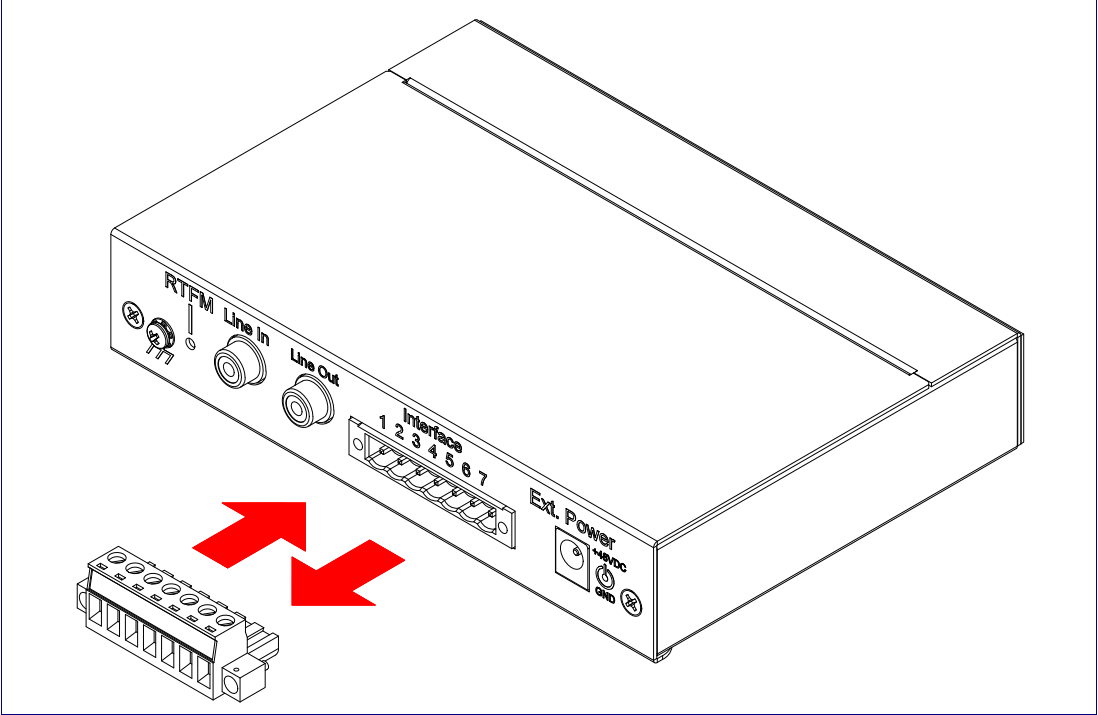


Figure 2-5. Removable Interface Connector



2.3.6 Connect to the Power Source

To use PoE, plug a Cat 5 Ethernet cable from the Singlewire/SIP Paging Adapter **Ethernet** port to your network. As an alternative to PoE, you can plug one end of a +48V DC power supply into the SIP Paging Adapter, and plug the other end into a receptacle. If required, connect the earth grounding wire to the chassis ground on the back of the unit. See [Figure 2-6](#).

Figure 2-6. Connecting to the Power Source
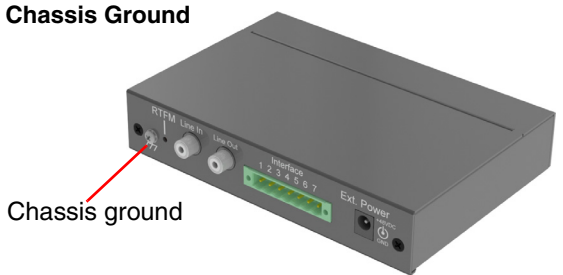
<p>PoE</p> 	<p>To set up the Singlewire/SIP Paging Adapter, connect the device to your network:</p> <p>Poe</p> <ul style="list-style-type: none"> For PoE, plug one end of an 802.3af Ethernet cable into the Singlewire/SIP Paging Adapter Ethernet port. Plug the other end of the Ethernet cable into your network. See the figure on the left.
<p>Non PoE with 48 VDC Power Supply</p> 	<p>Non-Poe</p> <ul style="list-style-type: none"> For Non-PoE, connect the Singlewire/SIP Paging Adapter to a 48VDC power supply. See the figure on the left. Note: Do not use both PoE and external power. Alternatively, you can use our part# 010867 PoE Power Injector as a cost-effective option.
<p>Chassis Ground</p> 	<p>Chassis Ground</p> <ul style="list-style-type: none"> If required, connect the earth grounding wire to the Chassis Ground. See the figure on the left.

2.3.7 Connect to the Network

Plug one end of a standard Ethernet cable into the Singlewire/SIP Paging Adapter **Ethernet** port. Plug the other end into your network.


Figure 2-7. Connecting to the Network



2.3.8 Confirm that the Singlewire/SIP Paging Adapter is Up and Running

The LEDs on the front of the Singlewire/SIP Paging Adapter verify the unit's operations.

Figure 2-8. SIP Paging Adapter LEDs

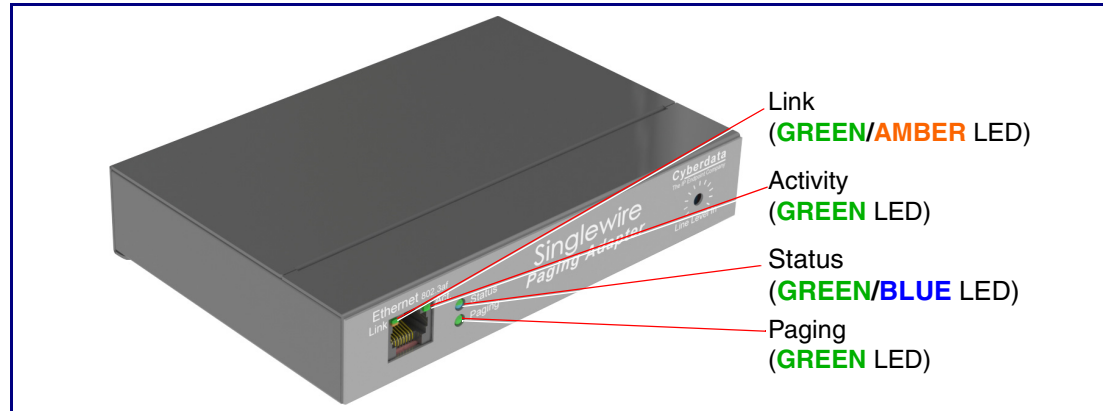

2.3.8.1 Confirm Power on, Network Connectivity, and Connection Speed

When you plug in the Ethernet cable or power supply:

- The **GREEN/BLUE Status** LED and the **GREEN Paging** LED both blink at a rate of 10 times per second during the initial network setup.
- The round, **GREEN/BLUE Status** LED on the front of the Singlewire/SIP Paging Adapter comes on indicating that the power is on. Once the device has been initialized, this LED blinks at one second intervals.
- The square, **GREEN/AMBER Link** LED above the Ethernet port indicates that the network connection has been established. The Link LED changes color to confirm the auto-negotiated connection speed:
 - The Link LED is **GREEN** at 10 Mbps.
 - The Link LED is **AMBER** at 100 Mbps.
- The **GREEN Paging** LED comes on after the device is booted and initialized. This LED blinks when a page is in progress. You can disable **Beep on Initialization** on the **Device Configuration** page.

2.3.8.2 Verify Network Activity

The square, **GREEN Activity** LED blinks when there is network traffic.

2.3.9 Announcing the IP Address

To announce the IP address for the Singlewire/SIP Paging Adapter, briefly press and then quickly release the **RTFM** switch. See [Figure 2-9](#).

Note The IP address announcement can be heard if a speaker or amplified speaker is connected to the unit.


Figure 2-9. RTFM Switch



2.3.10 Restore the Factory Default Settings

The Singlewire/SIP Paging Adapter is delivered with factory set default values for the parameters in [Table 2-3](#). Use the **RTFM** switch (see [Figure 2-10](#)) on the back of the unit to restore these parameters to the factory default settings.

Figure 2-10. RTFM Switch

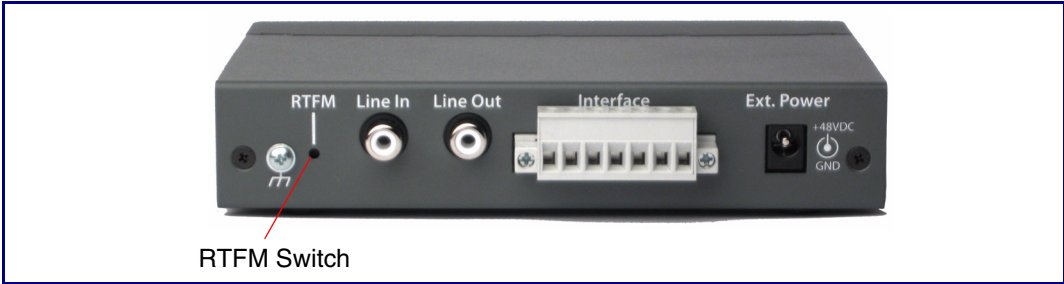

Note When you perform this procedure, the factory default settings are restored. The default parameters for access are shown in [Table 2-3](#).

Table 2-3. Factory Default Settings

Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.

To restore these parameters to the factory default settings:

1. Press and hold the **RTFM** switch until the status and paging lights come on.
2. Continue to press the switch until after the indicator lights go off, and then release it.

Note The “Restoring Defaults” announcement can be heard if a speaker or amplified speaker is connected to the unit.

3. The Singlewire/SIP Paging Adapter settings are restored to the factory defaults.

2.4 Configure the Device Parameters

To configure the device online, use a standard web browser.

Configuration of the device is taken care of by the InformaCast server. If an InformaCast server can not be found, the device will return to factory defaults as shown in [Table 2-4](#)..

Table 2-4. Factory Default Settings











Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.

2.4.1 Singlewire/SIP Paging Adapter Web Page Navigation

Table 2-5 shows the navigation buttons that you will see on every Singlewire/SIP Paging Adapter web page.

Table 2-5. Web Page Navigation

Web Page Item	Description
	Link to the Home page.
	Link to the Device page.
	Link to the Network page.
	Link to go to the SIP page.
	Link to the Multicast page.
	Link to the Fault page.
	Link to the Audiofiles page.
	Link to the Events page.
	Link to the Autoprovisioning page.
	Link to the Firmware page.

2.4.2 Using the Toggle Help Button

The **Toggle Help** button allows you to see a short description of some of the settings on the webpage. To use the **Toggle Help** button, do the following:


1. Click on the **Toggle Help** button that is on the UI webpage. See [Figure 2-11](#) and [Figure 2-12](#).

Figure 2-11. Toggle/Help Button




2. You will see a question mark (?) appear next to each web page item that has been provided with a short description by the Help feature. See [Figure 2-12](#).

Figure 2-12. Toggle Help Button and Question Marks

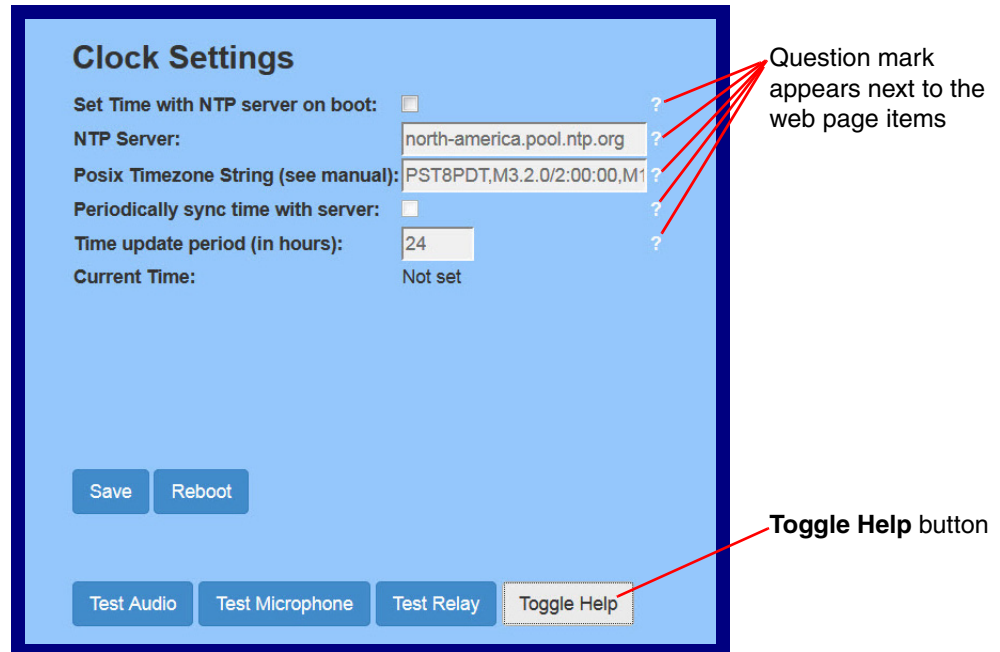

3. Move the mouse pointer to hover over the question mark (?), and a short description of the web page item will appear. See [Figure 2-13](#).

Figure 2-13. Short Description Provided by the Help Feature

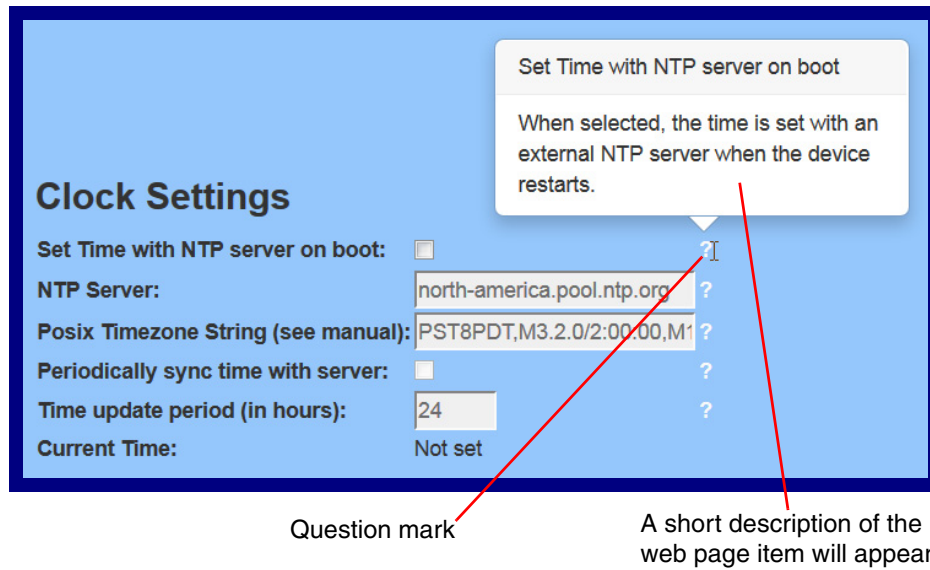

2.4.3 Log in to the Configuration GUI

1. Open your browser to the Singlewire/SIP Paging Adapter IP address.

Note If the network does not have access to a DHCP server, the device will default to an IP address of 10.10.10.10.

Note Make sure that the PC is on the same IP network as the Singlewire/SIP Paging Adapter.

Note You may also download CyberData's VoIP Discovery Utility program which allows you to easily find and configure the default web address of the CyberData VoIP products.

CyberData's VoIP Discovery Utility program is available at the following website address:

http://www.cyberdata.net/support/voip/discovery_utility.html

The unit ships in DHCP mode. To get to the **Home** page, use the discovery utility to scan for the device on the network and open your browser from there.

Note To work with the Singlewire/SIP Paging Adapter configuration *after* the initial configuration, log in using the IP address you assign to the device. [Section 2.4.5, "Configure the Network Parameters"](#) provides instructions for entering the IP address.

2. When prompted, use the following default **Username** and **Password** to open the configuration Home page:

Username: **admin**

Password: **admin**

Change the
Default Username
and Password

To change the default Web access Username and Password:

1. Enter the new Username from four to 25 alphanumeric characters in the **Change Username** field. The Username is case-sensitive.
2. Enter the new Password from four to 20 alphanumeric characters in the **Change Password** field. The Password is case-sensitive.
3. Enter the new password again in the **Re-enter New Password** field.

Click **Save Settings**.

Figure 2-14. Home Page

HomeDeviceNetworkSIPMulticastFaultAudiofilesEventsAutoprovFirmware

CyberData v3.1 SWSPA

Current Status

Serial Number: 280100001
Mac Address: 00:20:f7:03:11:cf
Firmware Version: v11.5.5

IP Addressing: DHCP
IP Address: 10.10.1.117
Subnet Mask: 255.0.0.0
Default Gateway: 10.0.0.1
DNS Server 1: 10.0.1.56
DNS Server 2:

SIP Mode: Enabled
Multicast Mode: Disabled
Event Reporting: Disabled
Nightringer: Disabled

Primary SIP Server: **Not registered**
Backup Server 1: Not registered
Backup Server 2: Not registered
Nightringer Server: Not registered

Admin Settings

Username: admin
Password:
Confirm Password:

Singlewire Status

Boot Time: 2016/01/25 15:34:15
Current Time: 2016/01/25 15:35:11
IC Servers: 10.0.1.195
10.0.1.196
Configuration File: InformaCastSpeaker.cfg
B'casts Accepted: 0
B'casts Rejected: 0
B'casts Active: 0

SaveRebootToggle Help

Import Settings

Browse... No file selected.

Import Config

Export Settings

Export Config

4. On the **Home Page**, review the setup details and navigation buttons described in [Table 2-6](#)

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-6. Home Page Overview







Web Page Item	Description
Admin Settings	
Username ?	The username to access the web interface. Enter up to 25 characters.
Password ?	The password to access the web interface. Enter up to 25 characters.
Confirm Password ?	Confirm the web interface password.
Current Status	
Serial Number	Shows the device serial number.
Mac Address	Shows the device Mac address.
Firmware Version	Shows the current firmware version.
IP Addressing	Shows the current IP addressing setting (DHCP or static).
IP Address	Shows the current IP address.
Subnet Mask	Shows the current subnet mask address.
Default Gateway	Shows the current default gateway address.
DNS Server 1	Shows the current DNS Server 1 address.
DNS Server 2	Shows the current DNS Server 2 address.
SIP Mode	Shows the current status of the SIP mode.
Multicast Mode	Shows the current status of the Multicast mode.
Event Reporting	Shows the current status of the Event Reporting mode.
Nightringer	Shows the current status of the Nightringer mode.
Primary SIP Server	Shows the current status of the Primary SIP Server.
Backup Server 1	Shows the current status of Backup Server 1.
Backup Server 2	Shows the current status of Backup Server 2.
Nightringer Server	Shows the current status of Nightringer Server.
Singlewire Status	
Boot Time	Shows the boot time.
Current Time	Shows the current time.
IC Servers	Shows the InformaCast Server IP address.
Configuration File	Shows the configuration file.
B'casts Accepted	Shows the number of B'casts accepted.
B'casts Rejected	Shows the number of B'casts rejected.
B'casts Active	Shows the number of active B'casts.
Import Settings	
	Use this button to select a configuration file to import.

Table 2-6. Home Page Overview (continued)

Web Page Item	Description
	After selecting a configuration file, click Import to import the configuration from the selected file. Then, click Save and Reboot to store changes.
Export Settings	
	Click Export to export the current configuration to a file.
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

At this point you can:

- Review the Singlewire/SIP Paging Adapter's **Current Settings**. Use the RTFM switch to restore the factory default settings. See [Section 2.3.10, "Restore the Factory Default Settings"](#).
- Configure the device parameters. Click on the **Device** button and see [Section 2.4.4, "Configure the Device Parameters"](#).
- Configure the network parameters. Click on the **Network** button and refer to [Section 2.4.5, "Configure the Network Parameters"](#) for instructions.
- Configure the SIP parameters. Click on the **SIP** button and see [Section 2.4.6, "Configure the SIP Parameters"](#).
- Configure the multicast parameters. Click on the **Multicast** button and see [Section 2.4.7, "Configure the Multicast Parameters"](#) for instructions.
- Configure the fault detection parameters. Click on the **Fault** button and see [Section 2.4.8, "Configure the Fault Detection Parameters"](#).
- Configure the audio parameters. Click on the **Audiofiles** button and see [Section 2.4.9, "Configure the Audio Parameters"](#) for instructions.
- Configure the event parameters. Click on the **Events** button and see [Section 2.4.10, "Configure the Event Parameters"](#) for instructions.
- Configure the autoprovisioning parameters. Click on the **Autoprov** button and see [Section 2.4.11, "Configure the Autoprovisioning Parameters"](#) for instructions.

Note Click on the **Firmware** button any time you need to upload new versions of the firmware. See [Section 2.5, "Upgrading the Firmware"](#) for instructions.

2.4.4 Configure the Device Parameters

Miscellaneous device settings such as the page prompt and analog options are configured on this page. In addition, you may also enable Polycom Paging to page Polycom IP phones using their proprietary Polycom Paging protocol.

1. Click on the **Device** button to open the **Device** page. See [Figure 2-15](#).

Figure 2-15. Device Page

Home Device Network SIP Multicast Fault Audiofiles Events Autoprov Firmware

CyberData v3.1 SWSPA

Line-in Settings

Enable Line-in to Line-out Loopback ☐

Relay Settings

Activate Relay on Local Audio: ☐

Clock Settings

Set Time with NTP server on boot: ☐

NTP Server:

Posix Timezone String (see manual):

Periodically sync time with server: ☐

Time update period (in hours):

Current Time:

DTMF Settings

DTMF Duration:

Bypass DTMF Menus (Go straight to page): ☐

Send pre-configured DTMF for Analog Zone: ☐

Zone:

Manual DTMF Entry for Analog Zone: ☐

Require Security Code: ☐

Security Code:

Misc Settings

Device Name:

Beep on Init: ☐

Beep on Page: ☒

Disable HTTPS (NOT recommended): ☐

Test Audio Test Relay

Save Reboot Toggle Help






2. On the **Device** page, you may enter values for the parameters indicated in [Table 2-7](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-7. Device Configuration Parameters

Web Page Item	Description
Line-in Settings	
Enable Line-in to Line-out Loopback ?	Line-in audio will play back out the device's audio output ports. This is the lowest priority audio and will be preempted by any other audio stream.
Clock Settings	
Set Time with NTP Server on boot ?	When selected, the time is set with an external NTP server when the device restarts.
NTP Server ?	Use this field to set the address (in IPv4 dotted decimal notation or as a canonical name) for the NTP Server. This field can accept canonical names of up to 64 characters in length.
Posix Timezone String ?	See Section 2.4.4.1, "Time Zone Strings" for information about how to use the Posix Timezone String to specify time zone and daylight savings time where applicable. Enter up to 63 characters.
Periodically sync time with server ?	When selected, the time is periodically updated with the NTP server at the configured interval below.
Time update period (in hours) ?	The time interval after which the device will contact the NTP server to update the time. Enter up to 4 digits.
Current Time	Allows you to input the current time. (6 character limit)
Misc Settings	
Device Name ?	Type the device name. Enter up to 25 characters.
Beep on Init ?	Device will play the user defined "pagetone" audio file when it boots.
Beep on Page ?	Device will play the user defined "pagetone" audio file before playing a SIP page.
Disable HTTPS (NOT recommended) ?	Disables the encrypted connection to the webpage. We do not recommend disabling HTTPS for security reasons.
Relay Settings	
Activate Relay on Local Audio ?	The relay will be activated (closed) when the device is playing audio. Use this to activate an external amplifier when the device is playing audio.
DTMF Settings	
DTMF Duration ?	The duration, in milliseconds, of DTMF tones played out of the device's analog audio ports (0-65535).
Bypass DTMF Menus (Go straight to page) ?	When selected, the DTMF menu options are bypassed when a page is sent, and the device begins a live/buffered page no ability to send stored messages).
Send pre-configured DTMF for Analog Zone ?	When selected, a pre-configured DTMF sequence is sent to activate an analog zone when Bypass DTMF Menus (Go straight to page) setting is enabled.
Zone ?	Type the pre-configured DTMF sequence for the analog zone.

Table 2-7. Device Configuration Parameters (continued)

Web Page Item	Description
Manual DTMF Entry for Analog Zone ?	When selected, the device will prompt the caller to enter a DTMF sequence to activate an analog zone before prompting the caller to press 1 through 9 to send a stored message or press 0 to page. Note: The user must press the # key after entering the zone.
Require Security Code ?	When selected, the user will be prompted to enter a Security Code (entered on the Device Page) before being able to execute a page when calling the device.
Security Code ?	Type the security code in this field.
	Click on the Test Audio button to do an audio test. When the Test Audio button is pressed, you will hear a voice message for testing the device audio quality and volume.
	Click on the Test Relay button to do a relay test.
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.4.1 Time Zone Strings

The posix time zone string tells the internal date and time utilities how to handle daylight savings time for different time zones. The following table shows some common strings.

Table 2-8. Common Time Zone Strings

Time Zone	Time Zone String
US Pacific time	PST8PDT,M3.2.0/2:00:00,M11.1.0/2:00:00
US Mountain time	MST7MDT,M3.2.0/2:00:00,M11.1.0/2:00:00
US Eastern Time	EST5EDT,M3.2.0/2:00:00,M11.1.0/2:00:00
Phoenix Arizona ^a	MST7
US Central Time	CST6DST,M3.2.0/2:00:00,M11.1.0/2:00:00

a. Phoenix, Arizona does not use daylight savings time.

The following table shows a breakdown of the parts that constitute the following time zone string:

- ***CST6DST,M3.2.0/2:00:00,M11.1.0/2:00:00***

Table 2-9. Time Zone String Parts

Time Zone String Part	Meaning
CST6CDT	The time zone offset from GMT and three character identifiers for the time zone.
CST	Central Standard Time
6	The (hour) offset from GMT/UTC
CDT	Central Daylight Time
M3.2.0/2:00:00	The date and time when daylight savings begins.
M3	The third month (March)
.2	The 2nd occurrence of the day (next item) in the month
.0	Sunday
/2:00:00	Time of day to change
M11.1.0/2:00:00	The date and time when daylight savings ends.
M11	The eleventh month (November)
.1	The 1st occurrence of the day (next item) in the month
.0	Sunday
/2:00:00	Time of day to change

Time Zone String Examples

The following table has some more examples of time zone strings.

Table 2-10. Time Zone String Examples


Time Zone	Time Zone String
Tokyo ^a	IST-9
Berlin ^b	CET-1MET,M3.5.0/1:00,M10.5.0/1:00

a. Tokyo does not use daylight savings time.

b. For Berlin, daylight savings time starts on the last Sunday in March at 01:00 UTC, and ends on the last Sunday in October at 01:00 UTC, and is one hour ahead of UTC.

Time Zone Identifier A user-definable three or four character time zone identifier (such as PST, EDT, IST, MUT, etc) is needed at the beginning of the posix time zone string to properly set the time. However, the specific letters or numbers used for the time zone identifier are not important and can be any three or four letter or number combination that is chosen by the user. However, the time zone identifier cannot be blank.

Figure 2-16. Three or Four Character Time Zone Identifier

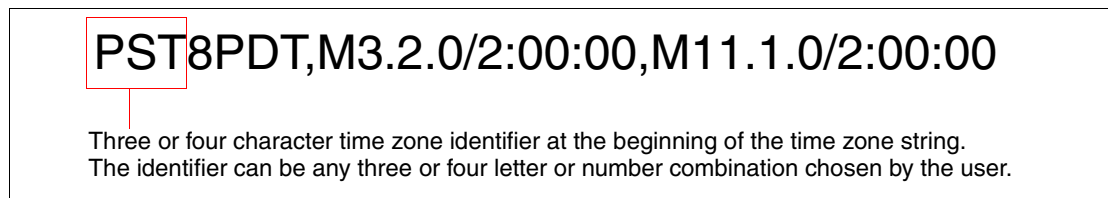

You can also use the following URL when a certain time zone applies daylight savings time:

<http://www.timeanddate.com/time/dst/2011.html>

World GMT Table

The following table has information about the GMT time in various time zones.

Table 2-11. World GMT Table

Time Zone	City or Area Zone Crosses
GMT-12	Eniwetok
GMT-11	Samoa
GMT-10	Hawaii
GMT-9	Alaska
GMT-8	PST, Pacific US
GMT-7	MST, Mountain US
GMT-6	CST, Central US
GMT-5	EST, Eastern US
GMT-4	Atlantic, Canada
GMT-3	Brazilia, Buenos Aries
GMT-2	Mid-Atlantic
GMT-1	Cape Verdes
GMT	Greenwich Mean Time, Dublin

Table 2-11. World GMT Table (continued)

Time Zone	City or Area Zone Crosses
GMT+1	Berlin, Rome
GMT+2	Israel, Cairo
GMT+3	Moscow, Kuwait
GMT+4	Abu Dhabi, Muscat
GMT+5	Islamabad, Karachi
GMT+6	Almaty, Dhaka
GMT+7	Bangkok, Jakarta
GMT+8	Hong Kong, Beijing
GMT+9	Tokyo, Osaka
GMT+10	Sydney, Melbourne, Guam
GMT+11	Magadan, Soloman Is.
GMT+12	Fiji, Wellington, Auckland

2.4.5 Configure the Network Parameters

Configuring the network parameters enables your network to recognize the Singlewire/SIP Paging Adapter and communicate with it. Click the **Network** button on the **Home** page to open the **Network** page.

Figure 2-17. Network Page

Home **Device** **Network** **SIP** **Multicast** **Fault** **Audiofiles** **Events** **Autoprov** **Firmware**

CyberData v3.1 SWSPA

Stored Network Settings

Addressing Mode: ☐ Static ☒ DHCP

Hostname:

IP Address:

Subnet Mask:

Default Gateway:

DNS Server 1:

DNS Server 2:

DHCP Timeout in seconds*:

* A value of -1 will retry forever

VLAN Settings

VLAN ID (0-4095):

VLAN Priority (0-7):

Current Network Settings

IP Address: 10.10.1.117

Subnet Mask: 255.0.0.0

Default Gateway: 10.0.0.1

DNS Server 1: 10.0.1.56

DNS Server 2:




On the **Network** page, enter values for the parameters indicated in [Table 2-12](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-12. Network Configuration Parameters

Web Page Item	Description
Stored Network Settings	
Addressing Mode ?	Select either DHCP IP Addressing or Static Addressing by marking the appropriate radio button. DHCP Addressing mode is enabled on default and the device will attempt to resolve network addressing with the local DHCP server upon boot. If DHCP Addressing fails, the device will revert to the last known IP address or the factory default address if no prior DHCP lease was established. See Section 2.3.10, "Restore the Factory Default Settings" for factory default settings. Be sure to click Save and Reboot to store changes when configuring a Static address.
Hostname ?	This is the hostname provided by the DHCP server. See the DHCP/ DNS server documentation for more information. Enter up to 64 characters.
IP Address ?	Enter the Static IPv4 network address in dotted decimal notation.
Subnet Mask ?	Enter the Subnet Mask in dotted decimal notation.
Default Gateway ?	Enter the Default Gateway IPv4 address in dotted decimal notation.
DNS Server 1 ?	Enter the primary DNS Server IPv4 address in dotted decimal notation.
DNS Server 2 ?	Enter the secondary DNS Server IPv4 address in dotted decimal notation.
DHCP Timeout in seconds ?	Specify the desired time-out duration (in seconds) that the device will wait for a response from the DHCP server before reverting back to the stored static IP address. The stored static IP address may be the last known IP address or the factory default address if no prior DHCP lease was established. Enter up to 8 characters. A value of -1 will retry forever.
VLAN Settings	
VLAN ID (0-4095) ?	Specify the IEEE 802.1Q VLAN ID number. Enter up to 4 digits. Note: The device supports 802.1Q VLAN tagging support. The switch port connected to the device will need to be in "trunking mode" for the VLAN tags to propagate.
VLAN Priority (0-7) ?	Specify the IEEE 802.1p VLAN priority level. Enter 1 digit. A value of 0 may cause the VLAN ID tag to be ignored.
Current Network Settings	
IP Address	Shows the current Static IP address.
Subnet Mask	Shows the current Subnet Mask address.
Default Gateway	Shows the current Default Gateway address.
DNS Server 1	Shows the current DNS Server 1 address.
DNS Server 2	Shows the current DNS Server 2 address.

Table 2-12. Network Configuration Parameters (continued)

Web Page Item	Description
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

On this page:

1. Specify whether you use **Static** or **DHCP IP Addressing** by marking the appropriate radio button. If you select **Static IP Addressing**, go to [Step 2](#).
2. For Static IP Addressing, also enter values for the following parameters:
 - The Singlewire/SIP Paging Adapter's **IP Address**: The Singlewire/SIP Paging Adapter is delivered with a factory default IP address. Change the default address to the correct IP address for your system.
 - The **Subnet Mask**.
 - The **Default Gateway**.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.6 Configure the SIP Parameters

The SIP parameters enable the Singlewire/SIP Paging Adapter to contact and register with the SIP server. Click on the **SIP** button to open the **SIP** page.

Figure 2-18. SIP Page

SIP Settings

Enable SIP operation: ☒

Register with a SIP Server: ☒

Use Cisco SRST: ☐

Primary SIP Server: 10.0.0.253

Primary SIP User ID: 199

Primary SIP Auth ID: 199

Primary SIP Auth Password: *****

Backup SIP Server 1:

Backup SIP User ID 1:

Backup SIP Auth ID 1:

Backup SIP Auth Password 1:

Backup SIP Server 2:

Backup SIP User ID 2:

Backup SIP Auth ID 2:

Backup SIP Auth Password 2:

Remote SIP Port: 5060

Local SIP Port: 5060

Outbound Proxy:

Outbound Proxy Port: 0

Disable rport Discovery: ☐

Buffer SIP Calls: ☐

Re-registration Interval (in seconds): 360

Unregister on Boot: ☐

Keep Alive Period: 10000

RTP Settings

RTP Port (even): 10500

Nightringer Settings

Enable Nightringer: ☐

SIP Server: 10.0.0.253

Remote SIP Port: 5060

Local SIP Port: 5061

Outbound Proxy:

Outbound Proxy Port: 0

User ID: 241

Authenticate ID: 241

Authenticate Password: *****

Re-registration Interval (in seconds): 360

Relay rings to multicast: ☐

Multicast Address: 224.1.2.32

Multicast Port: 2020

Call Disconnection

Terminate Call after delay: 0

Codec Selection

Force Selected Codec: ☐

Codec: PCMU (G.711, u-law) ▼

Save Reboot Toggle Help

On the **SIP** page, enter values for the parameters indicated in [Table 2-13](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-13. SIP Configuration Parameters

Web Page Item	Description
SIP Settings	
Enable SIP Operation ?	When enabled, the device will transmit, receive, and process SIP messages according to the configured SIP settings below.
Register with a SIP Server ?	When enabled, the device will attempt to register to the configured SIP Server(s) on this page. To configure the device to send and receive point-to-point SIP calls, enable SIP Operation and disable Register with a SIP Server (see Section 2.4.8, "Configure the Fault Detection Parameters").
Use Cisco SRST ?	When enabled, the backup servers are handled according to Cisco SRST (Survivable Remote Site Telephony). It is required for use in clustered Cisco Unified Communications Manager topologies.
Primary SIP Server ?	Enter the SIP server address as an IPv4 address in dotted decimal notation or a fully qualified domain name. This parameter also becomes the host portion of the SIP-URI for the device's extension on the primary SIP server. This field can accept entries of up to 255 characters in length.
Primary SIP User ID ?	Specify the SIP User ID for the Primary SIP Server. This parameter becomes the user portion of the SIP-URI for the device's extension on the primary SIP server. Enter up to 64 alphanumeric characters.
Primary SIP Auth ID ?	Specify the Authenticate ID for the Primary SIP Server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Primary SIP Auth Password ?	Specify the Authenticate Password for the Primary SIP Server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Backup SIP Server 1 ?	Enter the backup SIP server address as an IPv4 address in dotted decimal notation or a fully qualified domain name. This parameter also becomes the host portion of the SIP-URI for the device's extension on the backup SIP server. This field can accept entries of up to 255 characters in length.
Backup SIP User ID 1 ?	Specify the SIP User ID for the first backup SIP Server. This parameter becomes the user portion of the SIP-URI for the device's extension on the first backup SIP server. Enter up to 64 alphanumeric characters.
Backup SIP Auth ID 1 ?	Specify the Authenticate ID for the first backup SIP server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Backup SIP Auth Password 1 ?	Specify the Authenticate Password for the first backup SIP server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Backup SIP Server 2 ?	Enter a second backup SIP server address as an IPv4 address in dotted decimal notation or a fully qualified domain name. This parameter also becomes the host portion of the SIP-URI for the device's extension on the second backup SIP server. This field can accept entries of up to 255 characters in length.
Backup SIP User ID 2 ?	Specify the SIP User ID for the second backup SIP Server. This parameter becomes the user portion of the SIP-URI for the device's extension on the second backup SIP server. Enter up to 64 alphanumeric characters.



Table 2-13. SIP Configuration Parameters (continued)

Web Page Item	Description
Backup SIP Auth ID 2 ?	Specify the Authenticate ID for the second backup SIP server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Backup SIP Auth Password 2 ?	Specify the Authenticate Password for the second backup SIP server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Remote SIP Port ?	The Remote SIP Port is the port number the device will use as the destination port when sending SIP messages. The default Remote SIP Port is 5060. The supported range is 0-65536. Enter up to 5 digits.
Local SIP Port ?	The Local SIP Port is the port number the device will use to receive SIP messages. The default Local SIP Port is 5060. The supported range is 0-65536. Enter up to 5 digits.
Outbound Proxy ?	Enter the Outbound Proxy address as an IPv4 address in dotted decimal notation or a fully qualified domain name (FQDN). When an IP address is configured, the device will send all SIP messages to this IP address. When an FQDN is configured, the device will run DNS NAPTR, SRV, and A queries on the FQDN to resolve an IP address to which it will send all SIP messages. This field can accept entries of up to 255 characters in length.
Outbound Proxy Port ?	The Outbound Proxy Port is port number used as the destination port when sending SIP messages to the outbound proxy. A value of 0 will default to 5060. The supported range is 0-65536. Enter up to 5 digits.
Disable rport Discovery ?	Disabling rport Discovery will prevent the device from including the public WAN IP address and port number in the contact information that is sent to the remote SIP servers. This will generally only need to be enabled when using an SBC or SIP ALG in conjunction with a remote SIP server.
Buffer SIP Calls ?	Also referred to as "delayed paging." Device will buffer up to four minutes of audio then play back the recording after hang up or after the buffer is full.
Re-registration Interval (in seconds) ?	The SIP Re-registration interval (in seconds) is the SIP Registration lease time, also known as the expiry. The supported range is 30-3600 seconds. Enter up to 4 digits.
Unregister on Boot ?	When enabled, the device will send one registration with an expiry of 0 on boot.
Keep Alive Period ?	The minimum time in milliseconds between keep-alive packets sent for nat traversal. A value of 0 will disable keep alive packets.
RTP Settings	
RTP Port (even) ?	Specify the port number used for the RTP stream after establishing a SIP call. This port number must be an even number and defaults to 10500. The supported range is 0-65536. Enter up to 5 digits.
Nightringer Settings	
Enable Nightringer ?	When Nightringer is enabled, the device will attempt to register a second extension with the SIP server. Any calls made to this extension will play a ringtone (corresponds to Night Ring on the Audiofiles page). By design, it is not possible to answer a call to the Nightringer extension.
SIP Server ?	Enter the SIP server address as an IPv4 address in dotted decimal notation or a fully qualified domain name. This parameter also becomes the host portion of the SIP-URI for the device's Nightringer extension on the SIP server. This field can accept entries of up to 255 characters in length.

Table 2-13. SIP Configuration Parameters (continued)

Web Page Item	Description
Remote SIP Port ?	The Remote SIP Port is the port number the device will use as the destination port when sending SIP messages for the Nightringer extension. The default Remote SIP Port is 5060. The supported range is 0-65536. Enter up to 5 digits.
Local SIP Port ?	The Local SIP Port is the port number the device will use to receive SIP messages for the Nightringer extension. This value cannot be the same as the Local SIP Port for the primary extension. The default Local SIP Port is 5061. The supported range is 0-65536. Enter up to 5 digits.
Outbound Proxy ?	Enter the Outbound Proxy address as an IPv4 address in dotted decimal notation or a fully qualified domain name (FQDN). When an IP address is configured, the device will send all SIP messages to this IP address for the Nightringer extension. When an FQDN is configured, the device will run DNS NAPTR, SRV, and A queries on the FQDN to resolve an IP address to which it will send all SIP messages for the Nightringer extension. This field can accept entries of up to 255 characters in length.
Outbound Proxy Port ?	The Outbound Proxy Port is port number used as the destination port when sending SIP messages to the outbound proxy for the Nightringer extension. A value of 0 will default to 5060. The supported range is 0-65536. Enter up to 5 digits.
User ID ?	Specify the SIP User ID for the SIP server. This parameter becomes the user portion of the SIP-URI for the device's Nightringer extension. Enter up to 64 alphanumeric characters.
Authenticate ID ?	Specify the Authenticate ID for the SIP Server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Authenticate Password ?	Specify the Authenticate Password for the SIP Server. This parameter is required for SIP registration authentication. Enter up to 64 alphanumeric characters.
Re-registration Interval (in seconds) ?	The SIP Re-registration Interval (in seconds) is the SIP Registration lease time, also known as the expiry. The supported range is 30-3600 seconds. Enter up to 4 digits.
Relay rings to multicast ?	When selected, the device will play ring tones to the specified multicast address and port.
Multicast Address ?	The multicast address used for nightring audio.
Multicast Port ?	The multicast port used for nightring audio.
Call Disconnection	
Terminate Call After Delay ?	Automatically terminate an active call after a given delay in seconds. A value of 0 will disable this function. Enter up to 8 digits.
Codec Selection	
Force Selected Codec ?	When configured, this option will allow you to force the device to negotiate for the selected codec [PCMU(G.711, u-law), PCMA(G.711, a-law), or G.722]. Otherwise, the device will perform codec negotiation using the default list of supported codecs.
Codec ?	Select desired codec (only one may be chosen).
Save	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.

Table 2-13. SIP Configuration Parameters (continued)

Web Page Item	Description
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

Note For specific server configurations, go to the following website address:

<http://www.cyberdata.net/support/server/index.html>

1. Enter the IP address of the **SIP Server**.
2. Enter the port numbers used for SIP signaling:
 - a. **Remote SIP Port**
 - b. **Local SIP Port**
3. Enter the SIP registration parameters:
 - a. **SIP User ID**
 - b. **Authenticate ID**
 - c. **Authenticate Password**
4. For **SIP Registration**, designate whether you want the VoIP Paging Server to register with your SIP server.
5. At **Unregister on Reboot**:
 - a. Select **Yes** to automatically unregister the Singlewire/SIP Paging Adapter when you reboot it.
 - b. Select **No** to keep the Singlewire/SIP Paging Adapter registered when you reboot it.
6. In the **Register Expiration** field, enter the number of seconds the Singlewire/SIP Paging Adapter registration lease remains valid with the SIP Server. The Singlewire/SIP Paging Adapter automatically re-registers with the SIP server before the lease expiration timeout.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.6.1 Point-to-Point Configuration

When the board is set to not register with a SIP server, it's possible to set the device to dial out to a single endpoint. To do this, do the following:

1. On the **SIP** page (Figure 2-19), make sure that the **Register with a SIP Server** parameter is not selected.
2. Type the IP address of the remote device that you want to contact into the **Dial out Extension** field

Note Establishing point-to-point SIP calls may not work with all phones.

Figure 2-19. SIP Page Set to Point-to-Point Mode

Home Device Network **SIP** Multicast Fault Audiofiles Events Autoprov Firmware

CyberData v3.1 SWSPA

SIP Settings

Enable SIP operation: ☒

Register with a SIP Server: ☐

Use Cisco SRST: ☐

Primary SIP Server: 10.0.0.253

Primary SIP User ID: 199

Primary SIP Auth ID: 199

Primary SIP Auth Password: *****

Backup SIP Server 1:

Backup SIP User ID 1:

Backup SIP Auth ID 1:

Backup SIP Auth Password 1:

Backup SIP Server 2:

Backup SIP User ID 2:

Backup SIP Auth ID 2:

Backup SIP Auth Password 2:

Remote SIP Port: 5060

Local SIP Port: 5060

Outbound Proxy:

Outbound Proxy Port: 0

Disable rport Discovery: ☐

Buffer SIP Calls: ☐

Re-registration Interval (in seconds): 360

Unregister on Boot: ☐

Keep Alive Period: 10000

RTP Settings

RTP Port (even): 10500

Nightringer Settings

Enable Nightringer: ☐

SIP Server: 10.0.0.253

Remote SIP Port: 5060

Local SIP Port: 5061

Outbound Proxy:

Outbound Proxy Port: 0

User ID: 241

Authenticate ID: 241

Authenticate Password: *****

Re-registration Interval (in seconds): 360

Relay rings to multicast: ☐

Multicast Address: 224.1.2.32

Multicast Port: 2020

Call Disconnection

Terminate Call after delay: 0

Codec Selection

Force Selected Codec: ☐

Codec: PCMU (G.711, u-law) ▼

Save Reboot Toggle Help

Device is set to **NOT** register with a SIP server

2.4.7 Configure the Multicast Parameters

Multicast groups use multicasting to create public address paging zones. Multicasting is based on the concept of a group. Multicast addresses specify an arbitrary group of IP hosts that have joined the group and want to receive traffic sent to the group. Group members send IGMP messages to their local multicast routers, allowing the group traffic traversal from the source.

The **Multicast Configuration** page allows the device to join up to 10 paging zones for receiving ulaw/alaw encoded RTP audio streams. A paging zone can consist of one or many CyberData multicast group-enabled products. There is no limit to how many devices can be in a given paging zone. Each multicast group is defined by a multicast address and port number. Each multicast group is assigned a priority, allowing simultaneously arriving pages to be serviced based on importance. Multicast groups are compatible with IGMP through version three. The device supports simultaneous SIP and Multicast.

1. Click on the **Multicast** button to open the **Multicast** page. See [Figure 2-20](#).

Figure 2-20. Multicast Page

Home

Device

Network

SIP

Multicast

Fault

Audiofiles

Events

Autoprov

Firmware

CyberData v3.1 SWSPA

Multicast Settings

Enable Multicast Operation: ☐

Priority	Address	Port	Name	Beep
9	239.168.3.10	11000	Emergency	<input type="checkbox"/>
8	239.168.3.9	10000	MG8	<input type="checkbox"/>
7	239.168.3.8	9000	MG7	<input type="checkbox"/>
6	239.168.3.7	8000	MG6	<input type="checkbox"/>
5	239.168.3.6	7000	MG5	<input type="checkbox"/>
4	239.168.3.5	6000	MG4	<input type="checkbox"/>
3	239.168.3.4	5000	MG3	<input type="checkbox"/>
2	239.168.3.3	4000	MG2	<input type="checkbox"/>
1	239.168.3.2	3000	MG1	<input type="checkbox"/>
0	239.168.3.1	2000	Background Music	<input type="checkbox"/>

Polycom Default Channel

1

Polycom Priority Channel

24

Polycom Emergency Channel

25

SIP calls are considered priority 4.5

Port range can be from 2000-65535

Priority 9 is the highest and 0 is the lowest

A higher priority audio stream will always supersede a lower one

* You need to reboot for changes to take effect



Save

Reboot

2. On the **Multicast** page, enter values for the parameters indicated in [Table 2-14](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-14. Multicast Configuration Parameters

Web Page Item	Description
Enable Multicast Operation	Enables or disables multicast operation.
Priority	Indicates the priority for the multicast group. Priority 9 is the highest (emergency streams). 0 is the lowest (background music). SIP calls are considered priority 4.5 . See Section 2.4.7.1, "Assigning Priority" for more details.
Address	Enter the multicast IP Address for this multicast group (15 character limit).
Port	Enter the port number for this multicast group (5 character limit [range can be from 2000 to 65535]). Note: The multicast ports have to be even values. The webpage will enforce this restriction.
Name	Assign a descriptive name for this multicast group (25 character limit).
Beep	When selected, the device will play a beep before multicast audio is sent.
Polycom Default Channel	When a default Polycom channel/group number is selected, the SIP Paging Adapter will subscribe to the default channel for one-way group pages. Group Numbers 1-25 are supported. Or, select Disabled to disable this channel.
Polycom Priority Channel	When a priority Polycom channel/group number is selected, the SIP Paging Adapter will subscribe to the priority channel for one-way group pages. Group Numbers 1-25 are supported. Or, select Disabled to disable this channel.
Polycom Emergency Channel	When an emergency Polycom channel/group number is selected, the SIP Paging Adapter will subscribe to the default channel for one-way group pages. Group Numbers 1-25 are supported. Or, select Disabled to disable this channel.
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
	Click on the Reboot button to reboot the system.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.7.1 Assigning Priority

When playing multicast streams, audio on different streams will preempt each other according to their priority in the list. An audio stream with a higher priority will interrupt a stream with a lower priority.

If both SIP and Multicast is enabled, SIP audio streams are considered priority **4.5**. SIP audio will interrupt multicast streams with priority **0** through **4** and will be interrupted by multicast streams with priority **5** through **9**.

Note SIP calls, multicast streams, ring tones, ringback tones, and nightring tones are all prioritized.

Ringtones and
Nightringtones

Ringtones all play at the same priority level. This means that it is possible to have a nightring tone and a normal ringtone playing at the same time.

2.4.7.2 Polycom Paging

Page your entire paging infrastructure, including legacy analog paging systems, using Polycom IP phones and a CyberData SIP Paging Adapter. Simultaneously paging your IP phones and overhead speakers can be as simple as pressing the Paging soft key on a Polycom IP phone.

The Polycom Paging feature is supported on Polycom IP phones using UC Software 4.0.0 and higher. The Polycom paging feature operates in two modes: Push-to-Talk (PTT) and Group Paging. Only Group Paging mode pages are supported by the SIP Paging Adapter.

Polycom phones use the same multicast IP address and port number for both PTT and Group Paging multicasts. Make sure to note the Polycom multicast IP address and port number before configuring the CyberData SIP Paging Adapter. Polycom phones use a default multicast IP address of 224.0.1.116 and odd-numbered port 5001.

While the same multicast IP address and port number is used for all Polycom pages in both modes, Polycom uses numbered "groups" or "channels" to differentiate between each paging group. Each "group" or "channel" is numbered 1 through 25.

The SIP Paging Adapter can subscribe to Group Numbers 1 through 25 for Group Paging one-way audio pages. You may configure up to three group numbers or "channels", which are labeled **Polycom Default Channel**, **Polycom Priority Channel**, and **Polycom Emergency Channel** on the **Multicast Page**. Each of the three available channels can be disabled.

It is important to note the SIP Paging Adapter assigns a priority to each multicast group, as referenced in [Section 2.4.7.2, "Polycom Paging"](#). Polycom priority assignments by channel are ignored.

When configuring Polycom phones for their Group Paging feature, be sure the following settings are configured:

- Payload Size = 20 ms (milliseconds)
- Codec = G.711Mu

The SIP Paging Adapter supports Polycom Group Paging multicasts that are G.711Mu encoded with a payload size of 20 ms.

Use the following steps to configure Polycom Group Paging on the SIP Paging Adapter:

1. Identify the Polycom multicast IP address and port number used by the Polycom phones.

2. Check the box to **Enable Multicast Operation** on the **Multicast Page**.
3. Choose a priority group and enter the Polycom IP address and port number into the **Priority**, **Address**, and **Port** fields on the **Multicast Page**.
4. Select up to three channel/group numbers for Group Paging subscriptions at the bottom of the **Multicast Page**.
5. Save and reboot to store changes.

2.4.8 Configure the Fault Detection Parameters

1. Click on the **Fault** button to open the **Fault** page. See [Figure 2-21](#).





Figure 2-21. Fault Page

The screenshot shows the 'Fault' page of the CyberData v3.1 SWSPA web interface. At the top is a navigation bar with tabs: Home, Device, Network, SIP, Multicast, Fault (selected), Audiofiles, Events, Autopro, and Firmware. Below the navigation bar, the title 'CyberData v3.1 SWSPA' is displayed in large, bold, black text. Underneath the title, the section 'Fault Detection Settings' is visible. This section contains four settings: 'Play Stored Audio Locally:' with an unchecked checkbox, 'Make call to extension:' with an unchecked checkbox, 'Dial Out Extension:' with a text input field containing '600', and 'Dial Out ID:' with a text input field containing 'id204'. Below these settings is a 'Repeat Message:' label and a text input field containing '0'. At the bottom of the settings section, there are three buttons: 'Save', 'Reboot', and 'Toggle Help'. Below these buttons is a 'Test Fault Detection' button. The entire page has a light blue background.

2. On the **Fault Detection** page, enter values for the parameters indicated in [Table 2-15](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-15. Fault Detection Configuration Parameters

Web Page Item	Description
Fault Detection Settings	
Play Stored Audio Locally ?	When selected, the device will play the user defined “sensor triggered” audio file when the fault detection is triggered.
Make Call to Extension ?	When selected, the device will call an extension when fault detection is triggered. Use the Dial Out Extension field to specify the extension the device will call.
Dial Out Extension ?	Specify the extension the device will call when fault detection is triggered. Enter up to 64 alphanumeric characters.
Dial Out ID ?	An additional Caller identification string added to outbound calls. Enter up to 64 alphanumeric characters.
Repeat Message ?	The number of times to repeat the audio message through the local speaker or to the remote endpoint. A value of 0 will repeat forever. Enter a value from 0-65536.
	Click on the Test Fault Detection button to test the fault detection feature.
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.9 Configure the Audio Parameters

Click on the **Audiofiles** button to open the **Audiofiles** page. See [Figure 2-22](#). The **Audiofiles** page is used to add custom audio to the board. User uploaded audio will take precedence over the audio files shipped with the device.

Figure 2-22. Audiofiles Page

Home Device Network SIP Multicast Fault **Audiofiles** Events Autoprov Firmware

CyberData v3.1 SWSPA

Available Space 36.17MB

Stored Messages

Stored Message 1: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 2: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 3: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 4: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 5: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 6: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 7: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 8: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>
Stored Message 9: Currently set to: default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>	Repeat: <input type="text" value="0"/>	Infinite: <input type="checkbox"/>

Figure 2-23. Audiofiles Page

Audio Files

0:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
1:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
2:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
3:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
4:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
5:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
6:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
7:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
8:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
9:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
Dot:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
Audio Test:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
Enter Code:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
Invalid Code:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>
Page Tone:	Currently set to default	<input type="button" value="Browse..."/>	No file selected.	<input type="button" value="Play"/>	<input type="button" value="Delete"/>	<input type="button" value="Save"/>

Figure 2-24. Audiofiles Page

Your IP Address Is:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Rebooting:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Restoring Default:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Sensor Triggered:
Currently set to [file_sensortriggered]

Browse...
No file selected.

Play
Delete
Save

Night Ring:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Menu Audio Files

Cancel:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Currently Playing:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Fault Detection Message:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Invalid Entry:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Page:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Play Stored Message:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Pound (#):
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Press:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Stored Message:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Through:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

To:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

Enter Zone:
Currently set to default

Browse...
No file selected.

Play
Delete
Save

** If repeat/infinite values are changed, device must be rebooted for those changes to take effect*

Save
Reboot

On the **Audiofiles** page, enter values for the parameters indicated in [Table 2-16](#).

Note Each entry on the **Audiofiles** page replaces one of the stock audio files on the board. When the input box displays the word **default**, the Singlewire/SIP Paging Adapter is using the stock audio file. If that file is replaced with a user file, it will display the uploaded filename.

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-16. Audiofiles Configuration Parameters

Web Page Item	Description
Stored Messages	
Stored Message 1 through 9	<p>Stored Message 1 corresponds to the message played after pressing 1 on a phone keypad.</p> <p>Stored Message 2 corresponds to the message played after pressing 2 on a phone keypad.</p> <p>Stored Message 3 corresponds to the message played after pressing 3 on a phone keypad.</p> <p>Stored Message 4 corresponds to the message played after pressing 4 on a phone keypad.</p> <p>Stored Message 5 corresponds to the message played after pressing 5 on a phone keypad.</p> <p>Stored Message 6 corresponds to the message played after pressing 6 on a phone keypad.</p> <p>Stored Message 7 corresponds to the message played after pressing 7 on a phone keypad.</p> <p>Stored Message 8 corresponds to the message played after pressing 8 on a phone keypad.</p> <p>Stored Message 9 corresponds to the message played after pressing 9 on a phone keypad.</p>
Repeat	Type the number of times that you want the specific Stored Message to repeat. A value of 0 means the message will play once (no repeat). A value of 1 means the message will play twice (one repeat).
Infinite	<p>When selected, the specific Stored Message will repeat indefinitely after pressing the specific number key on a phone keypad.</p> <p>Note: The repeatedly playing audio can be canceled by calling, selecting the paging zone, and pressing the # key.</p>
Audio Files	
0-9	<p>The name of the audio configuration option is the same as the spoken audio that plays on the board (24 character limit).</p> <p>'0' corresponds to the spoken word "zero."</p> <p>'1' corresponds to the spoken word "one."</p> <p>'2' corresponds to the spoken word "two."</p> <p>'3' corresponds to the spoken word "three."</p> <p>'4' corresponds to the spoken word "four."</p> <p>'5' corresponds to the spoken word "five."</p> <p>'6' corresponds to the spoken word "six."</p> <p>'7' corresponds to the spoken word "seven."</p> <p>'8' corresponds to the spoken word "eight."</p> <p>'9' corresponds to the spoken word "nine."</p>
Dot	Corresponds to the spoken word "dot." (24 character limit).
Audio Test	Corresponds to the message "This is the CyberData IP speaker test message..." (24 character limit).
Enter Code	Corresponds to the message "Enter Code" (24 character limit).

Table 2-16. Audiofiles Configuration Parameters (continued)







Web Page Item	Description
Invalid Code	Corresponds to the message "Invalid Code" (24 character limit).
Page Tone	Corresponds to a simple tone that is unused by default (24 character limit).
Your IP Address is	Corresponds to the message "Your IP address is..." (24 character limit).
Rebooting	Corresponds to the spoken word "Rebooting" (24 character limit).
Restoring Default	Corresponds to the message "Restoring default" (24 character limit).
Sensor Triggered	Corresponds to the message "Sensor Triggered" (24 character limit).
Night Ring	Specifies the ringtone for nightring. By default this parameter uses the same audio file that is selected for the Ring Tone parameter.
Menu Audio Files	Menu Audio Files are user-uploadable messages that create the audio menu played to the caller.
Cancel	Corresponds to the word "Cancel" used in the audio menu played to the caller. (24 character limit).
Currently Playing	Corresponds to the words "Currently Playing" used in the audio menu played to the caller. (24 character limit).
Fault Detection Message	Corresponds to the words "Fault Detection Message" used in the audio menu played to the caller. (24 character limit).
Invalid Entry	Corresponds to the words "Invalid Entry" used in the audio menu played to the caller. (24 character limit).
Page	Corresponds to the word "Page" used in the audio menu played to the caller. (24 character limit).
Play Stored Message	Corresponds to the words "Play Stored Message" used in the audio menu played to the caller. (24 character limit).
Pound (#)	Corresponds to whatever word or phrase the user wishes to call the pound key in the audio menu played to the caller (24 character limit).
Press	Corresponds to the word "Press" used in the audio menu played to the caller. (24 character limit).
Stored Message	Corresponds to the words "Stored Message" used in the audio menu played to the caller. (24 character limit).
Through	Corresponds to the word "Through" used in the audio menu played to the caller. (24 character limit).
To	Corresponds to the word "To" used in the audio menu played to the caller. (24 character limit).
Enter Zone	Corresponds to the words "Enter Zone" used in the audio menu played to the caller. (24 character limit).
	The Browse button will allow you to navigate to and select an audio file.
	The Play button will play that audio file.
	The Delete button will delete any user uploaded audio and restore the stock audio file.
	The Save button will download a new user audio file to the board once you've selected the file by using the Browse button. The Save button will delete any pre-existing user-uploaded audio files.
	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.

Table 2-16. Audiofiles Configuration Parameters (continued)

Web Page Item	Description
	Click on the Reboot button to reboot the system.

2.4.9.1 User-created Audio Files

User-created audio files must be saved in one of the following formats:

- RIFF (little-endian) data,
- WAVE audio, Microsoft PCM
- 16 bit, mono 8000 Hz

Note These audio format restrictions are enforced by the webpage.

You can use the free utility *Audacity* to convert audio files into this format. See [Figure 2-25](#) through [Figure 2-27](#).

Figure 2-25. Audacity 1

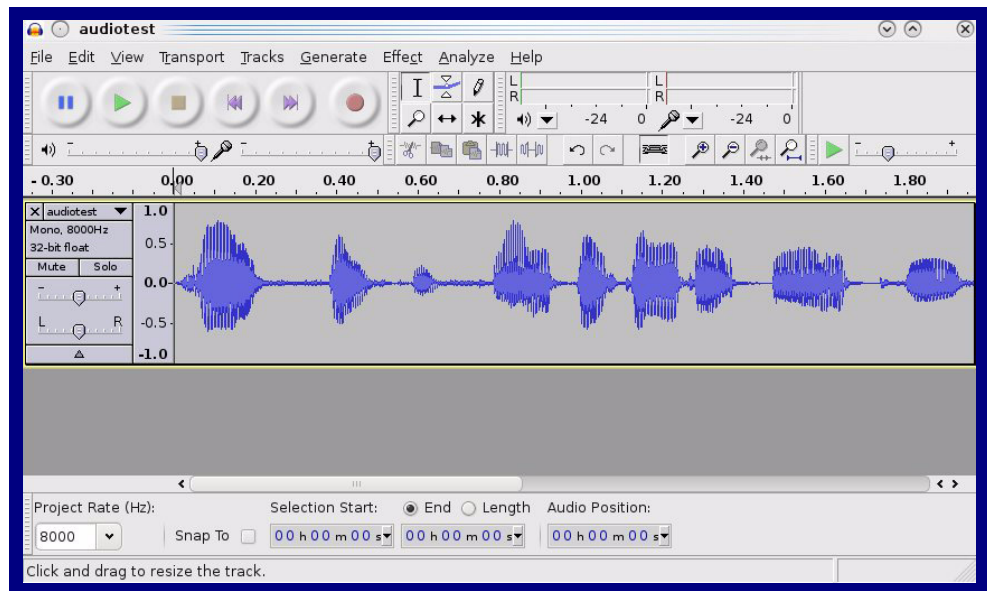


Figure 2-26. Audacity 2

Use arrow keys (or RETURN key after editing) to navigate fields.

Tag Name	Tag Value
Artist Name	
Track Title	
Album Title	
Track Number	
Year	
Genre	
Comments	

Add Remove Clear


Genres Edit... Template Reset... Load... Save... Set Default

Cancel OK

When you export an audio file with Audacity, save the output as:

- **WAV (Microsoft) signed 16 bit PCM.**

Figure 2-27. WAV (Microsoft) signed 16 bit PCM

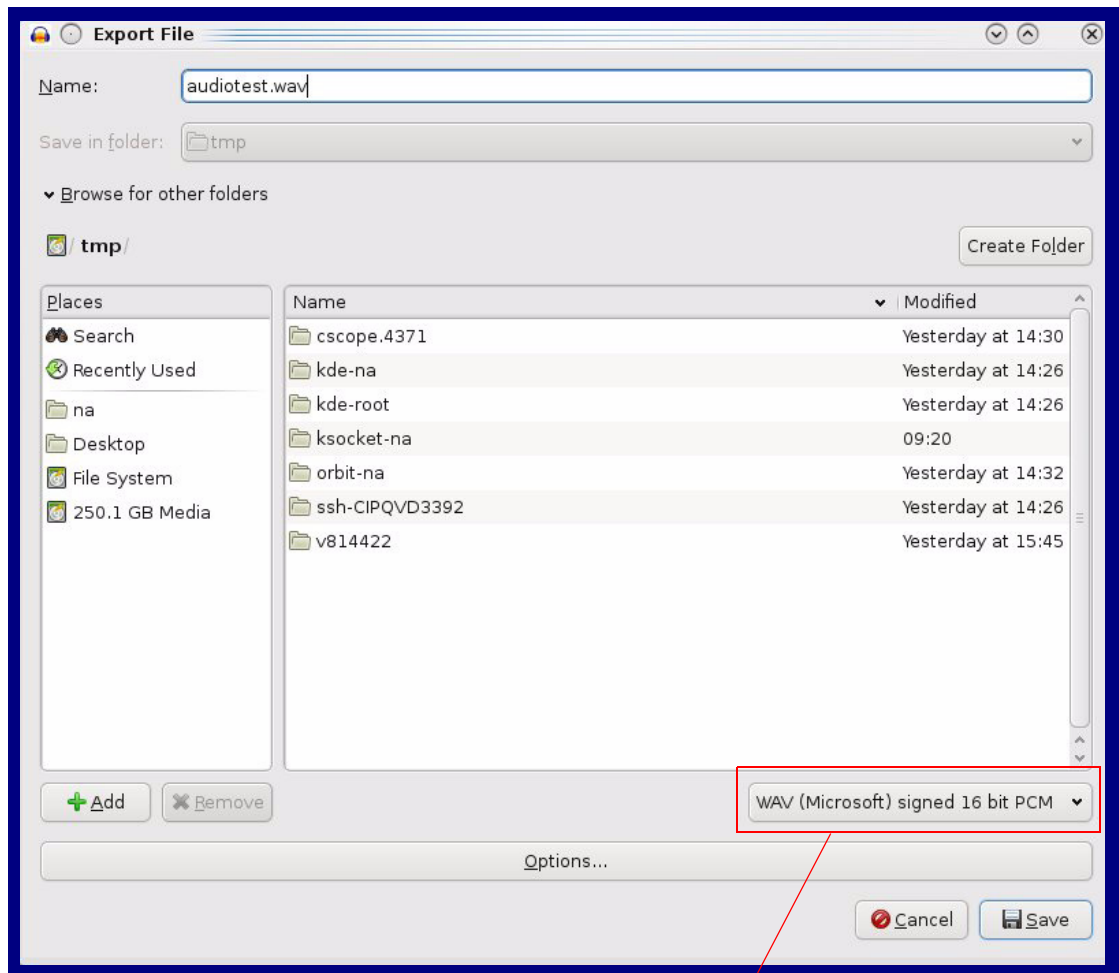

WAV (Microsoft) signed 16 bit PCM

2.4.10 Configure the Event Parameters

Click on the **Events** button to open the **Events** page (Figure 2-28). The **Events** page specifies a remote server that can be used to receive HTTP POST events when actions take place on the board.

Figure 2-28. Events Page

Home Device Network SIP Multicast Fault Audiofiles **Events** Autopro Firmware

CyberData v3.1 SWSPA

Enable Event Generation: ☐

Events

Enable Call Start Events: ☐

Enable Call Terminated Events: ☐

Enable Relay Activated Events: ☐

Enable Relay Deactivated Events: ☐

Enable Night Ring Events: ☐

Enable Power On Events: ☐

Enable Fault Events: ☐

Enable 60 Second Heartbeat: ☐

[Check All](#) [Uncheck All](#)

Event Server

Server IP Address: 10.0.0.252

Server Port: 9999

Server URL: xmlparse_engine

[Save](#) [Reboot](#) [Toggle Help](#)

Table 2-17 shows the web page items on the **Events** page.

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-17. Events Configuration

Web Page Item	Description
Enable Event Generation ?	The device will send HTTP POST events to the specified remote server and port number whenever a certain action takes place. Select an event type below to generate an HTTP POST event. See Section 2.4.10.1, "Example Packets for Events" for sample packets.
Events	
Enable Call Start Events ?	When selected, the device will report the start of a SIP call.
Enable Call Terminated Events ?	When selected, the device will report the end of a SIP call.
Enable Relay Activated Events ?	When selected, the device will report relay activation.
Enable Relay Deactivated Events ?	When selected, the device will report relay deactivation.
Enable Night Ring Events ?	When selected, the device will report when it starts ringing upon an incoming SIP call to the Nightringer extension. As a reminder, the Nightringer extension always rings upon an incoming SIP call and it is not possible to alter this behavior.
Enable Power On Events ?	When selected, the device will report when it boots.
Enable Fault Events ?	When selected, the device will report when the on-board fault detection is activated.
Enable 60 Second Heartbeat ?	When enabled, the device will report a Heartbeat event every 60 seconds. SIP registration is not required to generate Heartbeat events.
Event Server	
Server IP Address ?	The IPv4 address of the event server in dotted decimal notation.
Server Port ?	Specify the event server port number. The supported range is 0-65536. Enter up to 5 digits.
Server URL ?	Generally, the destination URL is the name of the application that receives the events and the string in the HTTP POST command. It can be a script used to parse and process the HTTP POST events. Enter up to 127 characters.
Check All	Click on Check All to select all of the events on the page.
Uncheck All	Click on Uncheck All to de-select all of the events on the page.
Save	Click the Save button to save your configuration settings. Note: You need to reboot for changes to take effect.
Reboot	Click on the Reboot button to reboot the system.
Toggle Help	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.10.1 Example Packets for Events

The server and port are used to point to the listening server and the 'Remote Event Server URL' is the destination URL (typically the script running on the remote server that's used to parse and process the POST events).

Note The XML is URL-encoded before transmission so the following examples are not completely accurate.

Here are example packets for every event:

```
POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 197
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>POWERON</event>
</cyberdata>
```

```
POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 199
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>HEARTBEAT</event>
</cyberdata>
```

```
POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 196
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>BUTTON</event>
</cyberdata>
```

```
POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 201
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>CALL_ACTIVE</event>
</cyberdata>
POST xmlparse_engine HTTP/1.1
```

```
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 205
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>CALL_TERMINATED</event>
</cyberdata>

POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 197
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>RINGING</event>
</cyberdata>

POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 234
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>MULTICAST_START</event>
<index>8</index>
</cyberdata>

POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 233
Content-Type: application/x-www-form-urlencoded

<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>MULTICAST_STOP</event>
<index>8</index>
</cyberdata>

POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 234
Content-Type: application/x-www-form-urlencoded
<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>RELAY_ACTIVATED</event>
</cyberdata>
POST xmlparse_engine HTTP/1.1
```

```
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 234
Content-Type: application/x-www-form-urlencoded
<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>RELAY_DEACTIVATED</event>
</cyberdata>

POST xmlparse_engine HTTP/1.1
Host: 10.0.3.79
User-Agent: CyberData/1.0.0
Content-Length: 234
Content-Type: application/x-www-form-urlencoded
<?xml version="1.0" encoding="ISO-8859-1"?>
<cyberdata NAME='CyberData VoIP Device' MAC='0020f70015b6'>
<event>NIGHTRINGING</event>
</cyberdata>
```


2.4.11 Configure the Autoprovisioning Parameters

Autoprovisioning can be used to automatically configure your device. The autoprovisioning file is an xml file with the device configuration. Values found in this file will override values stored in on-board memory.

Note By default, the device will try to set up its configuration with autoprovisioning.

1. Click the **Autoprov** menu button to open the **Autoprovisioning** page. See [Figure 2-29](#).

Figure 2-29. Autoprovisioning Page

Home Device Network SIP Multicast Fault Audiofiles Events Autoprov Firmware

CyberData v3.1 SWSPA

Disable Autoprovisioning: ☐

Autoprovisioning Server:

Autoprovisioning Filename:

Use http: ☐

Username:

Password:

Autoprovisioning autoupdate (in minutes):

Autoprovision at time (HHMMSS):

Autoprovision when idle (in minutes > 10):

See the manual to learn how to use autoprovisioning to configure your device.

Autoprovisioning happens on boot.

The device will first look for a configured server address and filename.

If these haven't been configured, it will look for an autoprovisioning server in your list of DHCP options and try to download '0020f70311cf.xml' and if this fails, '000000cd.xml'.

Save Reboot Toggle Help

Download Template

Autoprovisioning log

```
00:00 Autoprovisioning Device...
00:00 Autoprov found option 43 in DHCP server="http://chalmers.cyberdata.net"
00:00 Autoprov looking for 0020f70311cf.xml at http://chalmers.cyberdata.net
00:00 Autoprov looking for 000000cd.xml at http://chalmers.cyberdata.net
00:00 Failed to fetch autoprov file
00:00 Autoprov found option 72 in DHCP server="10.0.1.118"
00:00 Autoprov looking for 0020f70311cf.xml at 10.0.1.118
00:00 Autoprov looking for 000000cd.xml at 10.0.1.118
00:00 Failed to fetch autoprov file
00:00 Autoprov found option 150 in DHCP server="10.0.5.120"
00:00 Autoprov looking for 0020f70311cf.xml at 10.0.5.120
```

2. On the **Autoprovisioning** page, you may enter values for the parameters indicated in [Table 2-18](#).

Note The question mark icon (?) in the following table shows which web page items will be defined after the **Toggle Help** button is pressed.

Table 2-18. Autoprovisioning Configuration Parameters





Web Page Item	Description
Disable Autoprovisioning ?	Prevent the device from automatically trying to download a configuration file. See Section 2.4.11.1, "Autoprovisioning" for more information.
Autoprovisioning Server ?	Enter the address of the provisioning server as a fqdn or IPv4 address in dotted decimal notation.
Autoprovisioning Filename ?	<p>The name of the configuration file. The default autoprovisioning filename is in the format of <mac address>.xml.</p> <p>Supported filename extensions are ".txt", and ".xml." The current filename is denoted by an asterisk at the bottom of the Autoprovisioning Page. Enter up to 256 characters.</p> <p>A file may have any name with an xml extension. If a file name is entered, the device will look for the specified file name, and only that file.</p>
Use tftp ?	The device will use TFTP (instead of http) to download autoprovisioning files.
Username ?	The username used to authenticate with an autoprovisioning server. Leave this field blank to disable authentication.
Password ?	The password used to authenticate with an autoprovisioning server. Leave this field blank to disable authentication.
Autoprovisioning autoupdate (in minutes) ?	<p>The reoccurring time (in minutes) the device will wait before checking for new autoprovisioning files. Enter up to 6 digits. A value of 0 will disable this option.</p> <p>Note: To use the auto update options, enable the Set Time with NTP Server on boot setting on the Device Page (see Table 2-7).</p>
Autoprovision at time (HHMMSS) ?	<p>The time of day the device will check for a new autoprovisioning file. The time must be 6 characters in length and in HHMMSS format. An empty value will disable this option.</p> <p>Note: To use the auto update options, enable the Set Time with NTP Server on boot setting on the Device Page (see Table 2-7).</p>
Autoprovision when idle (in minutes > 10) ?	<p>The idle time (in minutes greater than 10) after which the device will check for a new autoprovisioning file. Enter up to 6 digits. A value of 0 will disable this option.</p> <p>Note: To use the auto update options, enable the Set Time with NTP Server on boot setting on the Device Page (see Table 2-7).</p>
	<p>Click the Save button to save your configuration settings.</p> <p>Note: You need to reboot for changes to take effect.</p>

Table 2-18. Autoprovisioning Configuration Parameters (continued)

Web Page Item	Description
	Click on the Reboot button to reboot the system.
	Click on the Toggle Help button to see a short description of some of the web page items. First click on the Toggle Help button, and you will see a question mark (?) appear next to some of the web page items. Move the mouse pointer to hover over a question mark to see a short description of a specific web page item.
	Press the Download Template button to create an autoprovisioning file for the device. See Section 2.4.11.3, "Get Autoprovisioning Template Button"
Autoprovisioning log	The autoprovisioning log provides information about the latest autoprovisioning attempt (i.e. dhcp options and server accessed and files parsed or not found).

Note You must click on the **Save** button and then the **Reboot** button for the changes to take effect.

2.4.11.1 Autoprovisioning

On boot, the device will look for an autoprovisioning server configured on the [Autoprovisioning Page](#) or specified as a DHCP option. When it finds a server, it will try to download the following (in order of preference):

1. The file configured on the autoprovisioning page.
2. A file named according to it's mac address (for example: 0020f7350058.xml).
3. The file 000000cd.xml

The file can be hosted using a standard web server (like apache, IIS, or nginx), and the device can download over SSL. The file server can be an ipv4 address in dotted decimal notation or a fully qualified domain name.

By default, the device will get its autoprovisioning server from the DHCP options. See [Section 2.4.11.2, "Sample dhcpd.conf"](#) for an example of how to configure dhcpd to offer autoprovisioning server addresses. If multiple options are set, the device will attempt to download autoprovisioning files from every server.

The DHCP option determines the protocol used to download the autoprovisioning file. The device looks for DHCP options in the following order:

1. Option 43 - a FQDN or an IP address to an http server
2. Option 72 - an IP address to an http server
3. Option 150 - an IP address to a tftp server
4. Option 66 - an IP address to a tftp server or if the entry starts with 'http', a FQDN to a http server.

You can download an autoprovisioning template file from the [Autoprovisioning Page](#) using the **Download Template** button (see [Table 2-18](#)). This file contains every configuration option that can be set on the board.

Autoprovisioning files can contain the whole configuration or a subset of this file. The first autoprovisioning file can also contain links to other autoprovisioning files.

The <MiscSettings> section contains some examples of additional autoprovisioning files:

```
<MiscSettings>
    <DeviceName>CyberData VoIP Intercom</DeviceName>
<!--    <AutoprovFile>common.xml</AutoprovFile>-->
<!--    <AutoprovFile>sip_reg[macaddress].xml</AutoprovFile>-->
<!--    <AutoprovFile>audio[macaddress]</AutoprovFile>-->
<!--    <AutoprovFile>device[macaddress].xml</AutoprovFile>-->
</MiscSettings>
```

After downloading the first autoprovisioning file, the device will step through up to twenty additional <AutoprovFile> entries and try to download these files from the same server.

When the device finds a filename with the string **[macaddress]**, it will replace this string with the mac address.

As an example, the user has configured option 43 on their DHCP server to “http://example.com,” and on their server, they have a file named **0020f7123456.xml** (the same as the mac address of the device).

The file 0020f7123456.xml contains:

```
<?xml version="1.0" encoding="utf-8" ?>
<specific>
  <MiscSettings>
    <DeviceName>Newname</DeviceName>
    <AutoprovFile>common.xml</AutoprovFile>
    <AutoprovFile>sip_reg[macaddress].xml</AutoprovFile>
    <AutoprovFile>audio[macaddress]</AutoprovFile>
    <AutoprovFile>device.xml</AutoprovFile>
  </MiscSettings>
</specific>
```

1. The device will first set it's name to 'Newname'.
2. It will try to download <http://example.com/common.xml>.
3. It will try to download http://example.com/sip_reg0020f7123456.xml.
4. It will try to download <http://example.com/audio0020f7123456>.
5. It will try to download <http://example.com/device.xml>.

The device is reconfigured every time it downloads a new file so if two files configure the same option the last one will be the one that is saved.

It is possible to autoprovision autoprovisioning values (for example, to disable autoprovisioning or to configure a time to check for new files).

Checking for New
Autoprovisioning
Files after Boot

The device will always check for an autoprovisioning files on boot but it can be configured to also check after a periodic delay, when idle, or at a specified time. When one of these options is set, the device will download its autoprovisioning files again, and if it finds any differences from the files it downloaded on boot, it will force a reboot and reconfigure.

The
Autoprovisioning
Filename

The autoprovisioning filename can contain a file, a file path, or a directory.

Table 2-19. Autoprovisioning File Name

Autoprovisioning Filename	Autoprovisioning Server	File Downloaded
config.xml	10.0.1.3	10.0.1.3/config.xml
/path/to/config.xml	10.0.1.3	10.0.1.3/path/to/config.xml
subdirectory/path/	10.0.1.3	10.0.1.3/subdirectory/path/0020f7020002.xml

TFTP options may not support subdirectories. If a directory is set in the filename field, firmware and audio files will also be downloaded from this subdirectory.

If the filename ends with a forward slash “/,” the device will treat it as a subdirectory.

For example:

The autoprovisioning server is set to “https://www.example.com”

The autoprovisioning filename is set to “cyberdata/”

On boot, the device will try to download:

https://www.example.com/cyberdata/0020f7123456.xml

...and if this fails:

https://www.example.com/cyberdata/000000cd.xml

Audio files and firmware files will also add “cyberdata” to the URL before downloading.

```
Autoprovisioning <FirmwareSettings>
Firmware Updates <FirmwareFile>505-uImage-ceilingspeaker</FirmwareFile>
                  <FirmwareServer>10.0.1.3</FirmwareServer>
                  <OutdoorIntercom30>firmware_file_v9.3.0</OutdoorIntercom30>
                  <OutdoorIntercom31>firmware_file_v10.3.0</OutdoorIntercom31>
                  <CallButton31>firmware_file_v10.3.0</CallButton31>
                  </FirmwareSettings>
```

In the <FirmwareSettings> section, the <FirmwareServer> element can be used to specify a different server for hosting firmware files. When this element is not available, the device will try to download the file from the autoprovisioning server.

The device will use the filename to determine when to autoprovision firmware updates. The default configuration is blank, so the first time you set a value in your autoprovisioning file, it may force a firmware update even if the firmware version has not changed.

The <FirmwareFile> name can contain path elements (i.e. /path/to/firmware/10.3.0-ulmage-[device_file_name]).

The device also supports product strings for downloading firmware. If the <FirmwareFile> option is not set, the device will look for its particular product string for a firmware filename. In this way, a generic autoprovisioning file can specify unique firmware for a range of products.

The list of valid product strings:

```
<ProductString>CallButton31</ProductString>
<ProductString>EmergencyIntercom31</ProductString>
<ProductString>EmergencyIntercom31SW</ProductString>
<ProductString>IndoorIntercom31</ProductString>
<ProductString>IndoorIntercom31SW</ProductString>
<ProductString>IndoorKeypad31</ProductString>
<ProductString>IndoorKeypad31SW</ProductString>
<ProductString>OfficeRinger31</ProductString>
<ProductString>OfficeRinger31SW</ProductString>
<ProductString>OutdoorIntercom31</ProductString>
<ProductString>OutdoorIntercom31SW</ProductString>
<ProductString>OutdoorKeypad31</ProductString>
<ProductString>OutdoorKeypad31SW</ProductString>
<ProductString>Strobe31</ProductString>
<ProductString>Strobe31SW</ProductString>
```

Autoprovisioning
Example 1

Here's a simple example using four autoprovisioning files to configure two devices:

We boot up two devices with mac addresses **00:20:f7:02:00:01** and **00:20:f7:02:00:02** (Device1 and Device2).

The devices are set to use DHCP and that server provides an autoprovisioning server address with option 43. The address is "https://autoprovtest.server.net." The files on this server are as follows:

000000cd.xml

```
<MiscSettings>
<DeviceName>CyberData Autoprovisioned</DeviceName>
<AutoprovFile>sip_common.xml</AutoprovFile>
<AutoprovFile>sip_[macaddress].xml</AutoprovFile>
</MiscSettings>
```

sip_common.xml

```
<SIPSettings>
<SIPServer>10.0.0.253</SIPServer>
<RemoteSIPPort>5060</RemoteSIPPort>
</SIPSettings>
```

sip_0020f7020001.xml

```
<SIPSettings>
<SIPUserID>198</SIPUserID>
<SIPAuthPassword>ext198</SIPAuthPassword>
<DialoutExtension0>204</DialoutExtension0>
</SIPSettings>
```

sip_0020f7020002.xml

```
<SIPSettings>
<SIPUserID>500</SIPUserID>
<SIPAuthPassword>ext500</SIPAuthPassword>
<DialoutExtension0>555</DialoutExtension0>
</SIPSettings>
```

On boot, Device1 tries to fetch the file **0020f7023614.xml** from "https://autoprovtest.server.net". This file is not available, so device1 then tries to fetch the file **000000cd.xml**. This file exists, and Device1 parses the three elements.

1. Device1 changes its device name to **CyberData Autoprovisioned**.
2. Device1 finds an AutoprovFile element containing the filename **sip_common.xml**. The device downloads **sip_common.xml** from "https://autoprovtest.server.net," and imports this configuration, setting the sip server to **10.0.0.253** and the remote port to **5060.3**.
3. Device1 finds another AutoprovFile element containing the filename **sip_[macaddress].xml**. The device replaces the **[macaddress]** with its own mac address value creating **sip_0020f7020001.xml**, downloads this file from "https://autoprovtest.server.net," and imports this configuration. This sets the user ID to **198**, the password to **ext198**, and the dialout extension to **204**. Device1 is now finished with autoprovisioning.

Device2 goes through the same steps by setting its device name to **CyberData Autoprovisioned**, its SIP server to **10.0.0.253**, and its port to **5060**. When Device2 “sees” **sip_[macaddress].xml**, Device2 replaces it with its own mac address and downloads **sip_0020f7020002.xml** from “https://autoprovtest.server.net.” Device2 sets the SIP User ID to **500**, the password to **ext500**, and the dialout extension to **555**.

Autoprovisioning Example 2

Here is another example of setting up your autoprovisioning files:

We boot up two devices with mac addresses **00:20:f7:02:00:01** and **00:20:f7:02:00:02** (Device1 and Device2) and boot them on a network with a DHCP server configured with an autoprovisioning server at **10.0.1.3** on option **150**. Our TFTP server has three files:

0020f7020001.xml

```
<MiscSettings>
<AutoprovFile>common_settings.xml</AutoprovFile>
</MiscSettings>
<SIPSettings>
<SIPUserID>198</SIPUserID>
<SIPAuthPassword>ext198</SIPAuthPassword>
<DialoutExtension0>204</DialoutExtension0>
</SIPSettings>
```

0020f7020002.xml

```
<MiscSettings>
<AutoprovFile>common_settings.xml</AutoprovFile>
</MiscSettings>
<SIPSettings>
<SIPUserID>500</SIPUserID>
<SIPAuthPassword>ext500</SIPAuthPassword>
<DialoutExtension0>555</DialoutExtension0>
</SIPSettings>
```

common_settings.xml

```
<MiscSettings>
<DeviceName>CyberData Autoprovisioned</DeviceName>
</MiscSettings>
<SIPSettings> <SIPServer>10.0.0.253</SIPServer>
<RemoteSIPPort>5060</RemoteSIPPort>
</SIPSettings>
```

1. On boot, Device1 downloads **0020f7020001.xml** from **10.0.1.3** and imports these values. The SIP User ID is **198**, the password is **ext198**, and the dialout extension is **204**.

2. Device1 then gets the filename **common_settings.xml** from the AutoprovFile element and downloads this file from the TFTP server at **10.0.1.3**. and imports these settings. The device name is set to **CyberData Autoprovisioned**, the SIP server is set to **10.0.0.253**, and the port is set to **5060**.

Device2 does the same except it downloads **0020f7020002.xml** on boot and imports these values instead. The Sip User ID is **500**, password is **ext500**, and dialout extension is **555**. Device2 then downloads the **common_settings.xml** file and imports those values. The device name is set to **CyberData Autoprovisioned**, the SIP server is set to **10.0.0.253**, and the port is set to **5060**.

XML Files

XML files can contain <AutoprovFile> elements. If multiple DHCP options are specified, the device will try to download autoprovisioning files from each in turn. The device will only look for <AutoprovFile> elements in the first file downloaded from each server. You can specify up to 20 <AutoprovFile> elements in the first autoprovisioning file.

There are numerous ways to change an element of the **configuration(xml)** file. Using **sip ext** as an example, the extension can be changed:

Within the device-specific xml, i.e. **[macaddress].xml**, via the AutoprovFile element:<SIPSettings>/<SIPExt>

From the device specific xml, a pointer to a sip_common file

From the device specific xml, a pointer to the device specific sip_[macaddress].xml

From the common file, a pointer to sip_common.xml

From the common file, a pointer to the device specific (sip_[macaddress].xml)

Autoprovisioned Audio Files

Audio files are stored in non-volatile memory and an autoprovisioned audio file will only have to be downloaded once for each device. Loading many audio files to the device from the web page could cause it to appear unresponsive. If this happens, wait until the transfer is complete and then refresh the page.

The device uses the file name to determine when to download a new audio file. This means that if you used autoprovisioning to upload a file and then changed the contents of this file at the TFTP server, the device will not recognize that the file has changed (because the file name is the same).

Since audio files are stored in non-volatile memory, if autoprovisioning is disabled after they have been loaded to the board, the audio file settings will not change. You can force a change to the audio files on the board by clicking **Restore Default** on the **Audio Configuration** page or by changing the autoprovisioning file with “**default**” set as the file name.

2.4.11.2 Sample dhcpd.conf

```

#
# Sample configuration file for ISC dhcpd for Debian
#

ddns-update-style none;

option domain-name "voiplab";
option domain-name-servers 10.0.0.252;
option option-150 code 150 = ip-address;
option ntp-servers north-america.pool.ntp.org;
option space VendorInfo;
option VendorInfo.text code 10 = { text };
authoritative;
log-facility local7;

subnet 10.0.0.0 netmask 255.0.0.0 {
    max-lease-time 3600;
    default-lease-time 3600;

    option routers                10.0.0.1;
    option subnet-mask            255.0.0.0;

    option domain-name            "voiplab";
    option domain-name-servers    10.0.0.252;

    option time-offset            -8;                # Pacific Standard Time

#    option www-server            99.99.99.99;        # OPTION 72

#    option tftp-server-name      "10.0.1.52";        # OPTION 66
#    option tftp-server-name      "http://test.cyberdata.net"; # OPTION 66

#    option option-150            10.0.0.252;        # OPTION 150

# These two lines are needed for option 43
#    vendor-option-space VendorInfo;                # OPTION 43
#    option VendorInfo.text "http://test.cyberdata.net"; # OPTION 43

    range 10.10.0.1 10.10.2.1; }

```


2.4.11.3 Get Autoprovisioning Template Button

The **Get Autoprovisioning Template** button allows the user to generate, download, edit, and then store an autoprovisioning template on the server that serves the autoprovisioning files for devices.

To generate an autoprovisioning template directly from the device, complete the following steps:

1. On the **Autoprovisioning** page, click on the **Get Autoprovisioning Template** button.
2. You will see a window prompting you to save a configuration file (**.xml**) to a location on your computer ([Figure 2-30](#)). The configuration file is the basis for the default configuration settings for your unit).
3. Choose a location to save the configuration file and click on **OK**. See [Figure 2-30](#).

Figure 2-30. Configuration File

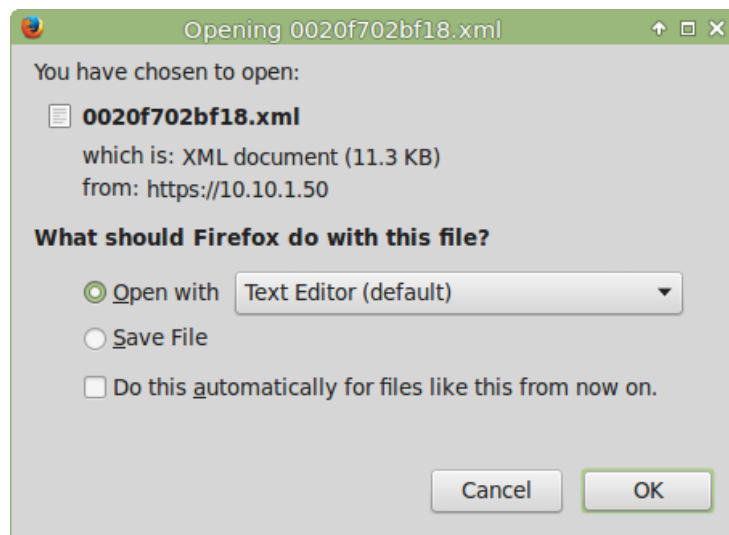

4. At this point, you can open and edit the autoprovisioning template to change the configuration settings in the template for the unit.
5. You can then upload the autoprovisioning file to a TFTP or HTTP server where the file can be loaded onto other devices.

2.5 Upgrading the Firmware



Caution

Equipment Hazard: Devices with a serial number that begins with 2801xxxxx can only run firmware versions 11.0.0 or later.


2.5.1 Upgrade the Firmware

Note Upgrading from firmware versions earlier than 2.0.0 require a factory reset after the update has been completed. This is due to a change in the way that the device stores its configuration file.

To update the firmware from your computer:

1. Please contact VoIP Technical Support to obtain the latest Singlewire/SIP Paging Adapter firmware file by submitting a contact form at the following website address:
<http://support.cyberdata.net/>
2. Log in to the Singlewire/SIP Paging Adapter home page as instructed in [Section 2.4.3, "Log in to the Configuration GUI"](#).

- Click on the **Firmware** menu button to open the **Firmware** page. See [Figure 2-31](#).



GENERAL ALERT

Caution

Equipment Hazard: CyberData strongly recommends that you first reboot the device before attempting to upgrade the firmware of the device. See [Section 2.5.2](#), "Reboot the Singlewire/SIP Paging Adapter".

Figure 2-31. Firmware Page





- Click on the **Browse** button, and then navigate to the location of the firmware file.
- Select the firmware file.
- Click on the **Upload** button.

Note Do not reboot the device after clicking on the **Upload** button.

Note This starts the upgrade process. Once the Singlewire/SIP Paging Adapter has uploaded the file, the **Uploading Firmware** countdown page appears, indicating that the firmware is being written to flash. The Singlewire/SIP Paging Adapter will automatically reboot when the upload is complete. When the countdown finishes, the **Firmware** page will refresh. The uploaded firmware filename should be displayed in the system configuration (indicating a successful upload and reboot).

- [Table 2-20](#) shows the web page items on the **Firmware** page.

Table 2-20. Firmware Parameters


Web Page Item	Description
Current Firmware Version	Shows the current firmware version.
	Use the Browse button to navigate to the location of the Intercom firmware file that you want to upload.
	Click on the Upload button to automatically upload the selected firmware and reboot the system.

2.5.2 Reboot the Singlewire/SIP Paging Adapter

To reboot a Singlewire/SIP Paging Adapter, log in to the web page as instructed in [Section 2.4.3, "Log in to the Configuration GUI"](#).

1. Click **Reboot** ([Figure 2-32](#)). A normal restart will occur.

Figure 2-32. Home Page

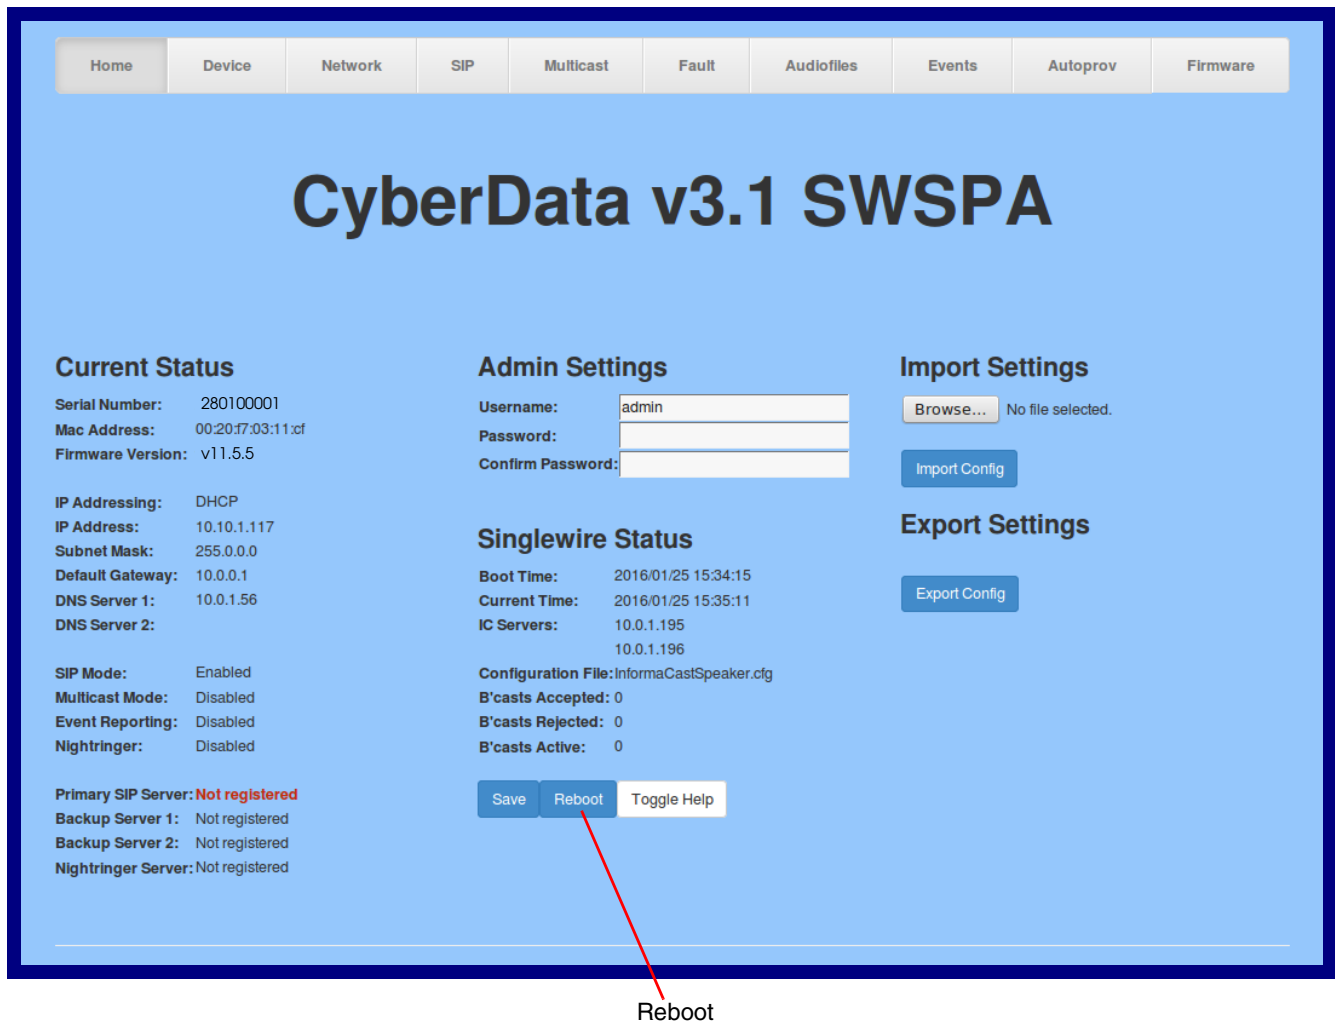

2.6 Command Interface

Some functions on the device can be activated using simple POST commands to the web interface. The examples in [Table 2-21](#) use the free unix utility, **wget** commands. However, any program that can send HTTP POST commands to the device should work.

2.6.1 Command Interface Post Commands

The commands in [Table 2-21](#) require an authenticated session (a valid username and password to work).

Table 2-21. Command Interface Post Commands

Device Action	HTTP Post Command ^a
Test relay (fixed at 5 seconds)	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "test_relay=yes"
Close relay indefinitely	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "activate_relay=yes"
Open relay indefinitely	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "deactivate_relay=yes"
Place call to extension (example: extension 130)	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "call=130"
Terminate active call	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "terminate=yes"
Force reboot	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "reboot=yes"
Play "audio test message"	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "test_audio=yes"
Announce IP address	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/command.cgi" --post-data "speak_ip_address=yes"
Trigger the Fault Detection Test (Fault Detection page)	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/sensor.cgi" --post-data "intrusiontest=yes"
Play the "0" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_0=yes"
Play the "1" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_1=yes"

Table 2-21. Command Interface Post Commands (continued)

Play the "2" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_2=yes"
Play the "3" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_3=yes"
Play the "4" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_4=yes"
Play the "5" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_5=yes"
Play the "6" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_6=yes"
Play the "7" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_7=yes"
Play the "8" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_8=yes"
Play the "9" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_9=yes"
Play the "Dot" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_d=yes"
Play the "Audio Test" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_audiotest=yes"
Play the "Page Tone" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_pagetone=yes"
Play the "Your IP Address Is" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_youripaddressis=yes"
Play the "Rebooting" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_rebooting=yes"
Play the "Restoring Default" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_restoringdefault=yes"
Play the "Sensor Triggered" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_intrusionsensortriggered=yes"
Play the "Night Ring" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_nightring=yes"

Table 2-21. Command Interface Post Commands (continued)

Play the "Stored Message "1" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_1=yes"
Play the "Stored Message "2" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_2=yes"
Play the "Stored Message "3" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_3=yes"
Play the "Stored Message "4" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_4=yes"
Play the "Stored Message "5" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_5=yes"
Play the "Stored Message "6" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_6=yes"
Play the "Stored Message "7" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_7=yes"
Play the "Stored Message "8" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_8=yes"
Play the "Stored Message "9" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_stored_9=yes"
Play the "Cancel" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_cancel=yes"
Play the "Currently Playing" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_currentlyplaying=yes"
Play the "Fault Detection Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_faultdetectionmessage=yes"
Play the "Invalid Entry" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_invalidentry=yes"
Play the "Page" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_page=yes"
Play the "Play Stored Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_playstoredmessage=yes"

Table 2-21. Command Interface Post Commands (continued)

Play the "Pound (#)" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_pound=yes"
Play the "Press" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_press=yes"
Play the "Stored Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_storedmessage=yes"
Play the "Through" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_through=yes"
Play the "To" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_to=yes"
Play the "Enter Code" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_entercode=yes"
Play the "Invalid Code" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_invalidcode=yes"
Play the "Enter Zone" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "play_menu_enter_zone=yes"
Delete the "0" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_0=yes"
Delete the "1" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_1=yes"
Delete the "2" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_2=yes"
Delete the "3" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_3=yes"
Delete the "4" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_4=yes"
Delete the "5" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_5=yes"
Delete the "6" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_6=yes"
Delete the "7" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_7=yes"

Table 2-21. Command Interface Post Commands (continued)

Delete the "8" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_8=yes"
Delete the "9" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_9=yes"
Delete the "Dot" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_d=yes"
Delete the "Audio Test" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_audiotest=yes"
Delete the "Page Tone" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_pagetone=yes"
Delete the "Your IP Address Is" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_youripaddressis=yes"
Delete the "Rebooting" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_rebooting=yes"
Delete the "Restoring Default" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_restoringdefault=yes"
Delete the "Sensor Triggered" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_intrusionsensortriggered=yes"
Delete the "Night Ring" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_nightring=yes"
Delete the "Stored Message "1" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_1=yes"
Delete the "Stored Message "2" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_2=yes"
Delete the "Stored Message "3" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_3=yes"
Delete the "Stored Message "4" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_4=yes"
Delete the "Stored Message "5" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_5=yes"
Delete the "Stored Message "6" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_6=yes"

Table 2-21. Command Interface Post Commands (continued)

Delete the "Stored Message "7" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_7=yes"
Delete the "Stored Message "8" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_8=yes"
Delete the "Stored Message "9" audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_stored_9=yes"
Delete the "Cancel" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_cancel=yes"
Delete the "Currently Playing" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_currentlyplaying=yes"
Delete the "Fault Detection Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_faultdetectionmessage=yes"
Delete the "Invalid Entry" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_invalidentry=yes"
Delete the "Page" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_page=yes"
Delete the "Play Stored Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_playstoredmessage=yes"
Delete the "Pound (#)" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_pound=yes"
Delete the "Press" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_press=yes"
Delete the "Stored Message" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_storedmessage=yes"
Delete the "Through" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_through=yes"
Delete the "To" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_to=yes"
Delete the "Enter Code" menu audio file	wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_entercode=yes"

Table 2-21. Command Interface Post Commands (continued)

Delete the "Invalid Code" menu audio file	<code>wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_invalidcode=yes"</code>
Delete the "Enter Zone" menu audio file	<code>wget --user admin --password admin --auth-no-challenge --no-check-certificate --quiet -O /dev/null "https://10.0.3.71/cgi-bin/audiofiles.cgi" --post-data "delete_menu_enter_zone=yes"</code>

a.Type and enter all of each http POST command on one line.

2.7 Identifying and Testing a Device when Using InformaCast 4.0 or Later

This section describes the basic process for identifying and testing the CyberData device when using Singlewire's InformaCast software version 4.0 or later.


Note If you have questions or need help, please consult your InformaCast documentation and or contact the CyberData support team.

Note CyberData's support is limited to IP endpoint functionality when used with an InformaCast system.

To add the Singlewire/SIP Paging Adapter to the InformaCast server:

1. Click **Edit IP Speakers** on the **Main Screen** of the **Singlewire Informacast Server Web Interface**.

Figure 2-33. Main Screen of the Singlewire InformaCast Server Web Interface

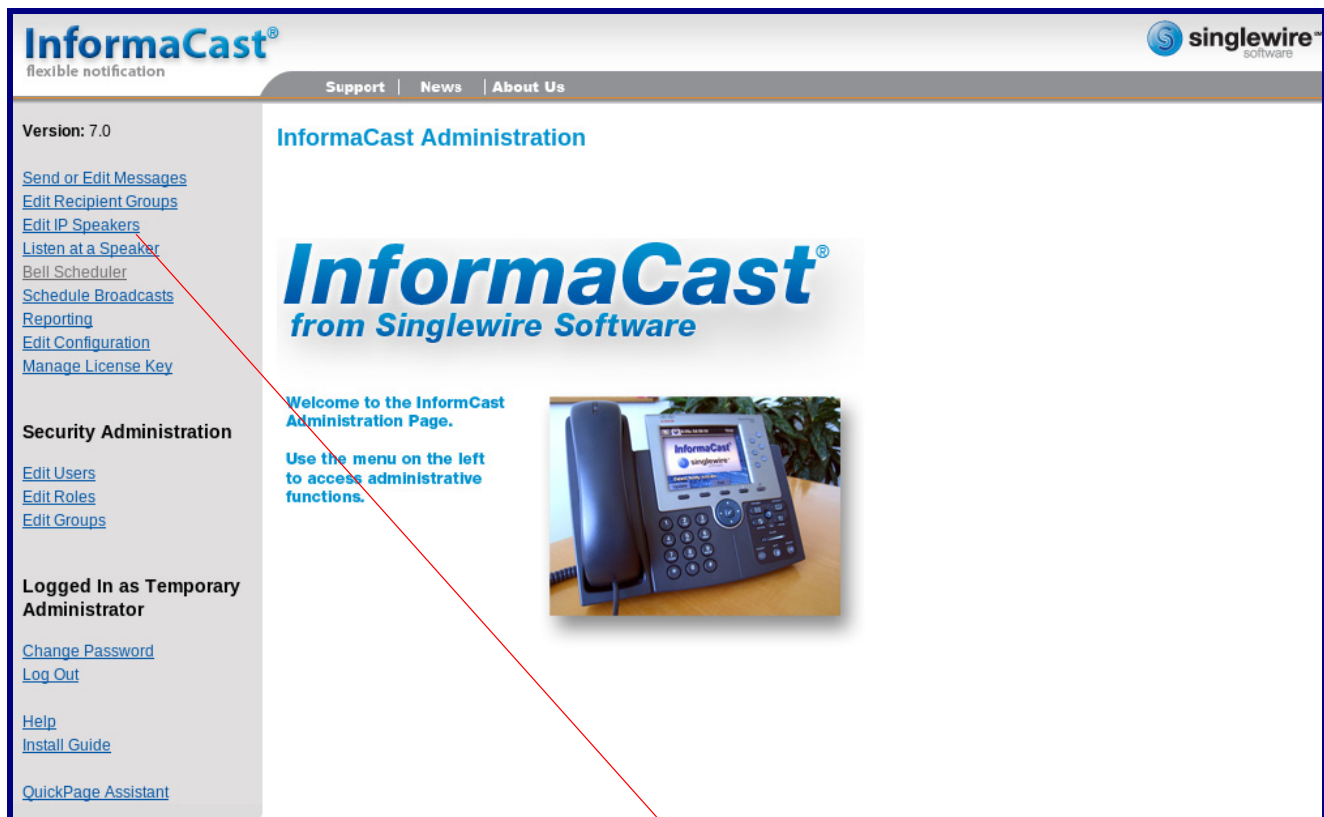

Edit IP Speakers

2. On the **IP Speaker Configuration** page, InformaCast will indicate that it has detected new speakers. Click **View**.

Figure 2-34. IP Speaker Configuration Page

InformaCast
flexible notification

Support | News | About Us

Version: 7.0

[Send or Edit Messages](#)
[Edit Recipient Groups](#)
[Edit IP Speakers](#)
[Listen at a Speaker](#)
[Bell Scheduler](#)
[Schedule Broadcasts](#)
[Reporting](#)
[Edit Configuration](#)
[Manage License Key](#)

Security Administration
[Edit Users](#)
[Edit Roles](#)
[Edit Groups](#)

Logged In as Temporary Administrator
[Change Password](#)
[Log Out](#)
[Help](#)
[Install Guide](#)
[QuickPage Assistant](#)

InformaCast Administration: IP Speaker Configuration

InformaCast has detected new IP Speakers on the network. [View](#)

Filter: Does

There are no IP Speakers known to InformaCast.

[Add](#)

You can reboot IP speakers using these options:

Only selected speakers will be rebooted. The number of selected speakers is shown above.

This will attempt to reboot all speakers that have registered with InformaCast, whether they are listed on this page or are "new" speakers.

You can adjust IP speaker volume using these options:

Volume Adjustment:

Only selected speakers will have their volume adjusted. The number of selected speakers is shown above.

This will attempt to adjust the volume of all configured speakers.

If you have many IP Speakers to define, they can be imported from a Comma Separated Values file, exported from a spreadsheet. Please refer to the InformaCast documentation regarding the format of the CSV file, or visit the [Help Page](#) (under "Tools") to find an Excel spreadsheet you can start.

InformaCast has detected new devices.

View

3. The **IP Speaker Configuration** page will show four newly detected speakers. Click **Test**.

Figure 2-35. IP Speaker Configuration Page

InformaCast
flexible notification

singlewire
software

Support | News | About Us

Version: 7.0

[Send or Edit Messages](#)
[Edit Recipient Groups](#)
[Edit IP Speakers](#)
[Listen at a Speaker](#)
[Bell Scheduler](#)
[Schedule Broadcasts](#)
[Reporting](#)
[Edit Configuration](#)
[Manage License Key](#)

Security Administration
[Edit Users](#)
[Edit Roles](#)
[Edit Groups](#)

Logged In as Temporary Administrator
[Change Password](#)
[Log Out](#)
[Help](#)
[Install Guide](#)
[QuickPage Assistant](#)

InformaCast Administration: IP Speaker Configuration

0

MAC address	Registration Status	Action
0020f7002dc2	Registered at Thu Dec 17 12:05:55 GMT-07:00 2009 (can record), IP=10.10.1.190	Add Test
0020f7002dc3	Registered at Thu Dec 17 12:05:52 GMT-07:00 2009 (can record), IP=10.10.0.192	Add Test
0020f7002dc4	Registered at Thu Dec 17 12:06:12 GMT-07:00 2009 (can record), IP=10.10.1.191	Add Test
0020f7002dc5	Registered at Thu Dec 17 12:05:59 GMT-07:00 2009 (can record), IP=10.10.0.193	Add Test

[View](#) configured speakers.

Test

4. On the **Test IP Speaker** page, Enter a number into the **Test duration** field.
5. Click **Test**.
6. You will hear a tone from the speaker being testing.
7. After the test, click **Cancel** to return to the **IP Configuration** page.

Figure 2-36. Test IP Speaker Page

InformaCast®
flexible notification

singlewire™
software

Support | News | About Us

Version: 7.0

[Send or Edit Messages](#)
[Edit Recipient Groups](#)
[Edit IP Speakers](#)
[Listen at a Speaker](#)
[Bell Scheduler](#)
[Schedule Broadcasts](#)
[Reporting](#)
[Edit Configuration](#)
[Manage License Key](#)

Security Administration
[Edit Users](#)
[Edit Roles](#)
[Edit Groups](#)

Logged In as Temporary Administrator
[Change Password](#)
[Log Out](#)
[Help](#)
[Install Guide](#)
[QuickPage Assistant](#)

InformaCast Administration: Test IP Speaker

IP Speaker MAC: 0020f7002dc2

Registration status: Registered at Thu Dec 17 12:05:55 GMT-07:00 2009 (can record), IP=10.10.1.190
[View Speaker's Status Page](#). [Reboot](#) Speaker.

Test duration: (seconds, 1-300, required)

Test duration View Speaker's Status Page Cancel Test

Note When viewing the device's status page via Informacast, Informacast links to the wrong port and path.

Informacast expects our device's status page to be at:

<http://<ipaddr>:10004/status>.

The status page is actually at:

[http://<ipaddr>/ \(port 80\)](http://<ipaddr>/ (port 80))

Therefore, if a user clicks the link to view the status page and is directed to:

<http://10.10.10.10:1004/status>

The user will need to edit the url in the address bar to:

<http://10.10.10.10/>

8. On the **IP Speaker Configuration** page, Click **Add** to add a speaker to the InformaCast server.

Figure 2-37. IP Configuration Page

The screenshot displays the InformaCast Administration interface for IP Speaker Configuration. The left sidebar contains navigation links for various system functions. The main content area shows a table of registered speakers. A red arrow points to the 'Add' button in the 'Action' column of the first row.

InformaCast
flexible notification

Support | News | About Us

Version: 7.0

[Send or Edit Messages](#)
[Edit Recipient Groups](#)
[Edit IP Speakers](#)
[Listen at a Speaker](#)
[Bell Scheduler](#)
[Schedule Broadcasts](#)
[Reporting](#)
[Edit Configuration](#)
[Manage License Key](#)

Security Administration
[Edit Users](#)
[Edit Roles](#)
[Edit Groups](#)

Logged In as Temporary Administrator
[Change Password](#)
[Log Out](#)
[Help](#)
[Install Guide](#)
[QuickPage Assistant](#)

InformaCast Administration: IP Speaker Configuration

0

MAC address	Registration Status	Action
0020f7002dc2	Registered at Thu Dec 17 12:05:55 GMT-07:00 2009 (can record), IP=10.10.1.190	Add Test
0020f7002dc3	Registered at Thu Dec 17 12:05:52 GMT-07:00 2009 (can record), IP=10.10.0.192	Add Test
0020f7002dc4	Registered at Thu Dec 17 12:06:12 GMT-07:00 2009 (can record), IP=10.10.1.191	Add Test
0020f7002dc5	Registered at Thu Dec 17 12:05:59 GMT-07:00 2009 (can record), IP=10.10.0.193	Add Test

[View](#) configured speakers.

Add

9. On the **Add IP Speaker** page, Fill out appropriate fields and click **Add**.

Figure 2-38. Add IP Speaker Page

The screenshot displays the 'InformaCast Administration: Add IP Speaker' web interface. The left sidebar contains navigation links for 'Send or Edit Messages', 'Edit Recipient Groups', 'Edit IP Speakers', 'Listen at a Speaker', 'Bell Scheduler', 'Schedule Broadcasts', 'Reporting', 'Edit Configuration', 'Manage License Key', 'Security Administration', 'Logged In as Temporary Administrator', 'Change Password', 'Log Out', 'Help', 'Install Guide', and 'QuickPage Assistant'. The main content area has the title 'InformaCast Administration: Add IP Speaker' and the following fields:

- IP Speaker Name: (required)
- Speaker Description:
- Dial Code: (numeric shortcut for optional phone interface)
- MAC Address: (required, 12 hex digits)
- Volume:

At the bottom of the form are 'Cancel' and 'Add' buttons. A red arrow points from the 'Add' button to the word 'Add' located below the screenshot.

Your device is now registered to the InformaCast server. You now can configure this device as part of the InformaCast system setup as required.

Appendix A: Setting up a TFTP Server

A.1 In a LINUX Environment

To set up a TFTP server on LINUX:

1. Create a directory dedicated to the TFTP server, and move the files to be uploaded to that directory.
2. Run the following command where `/tftpboot/` is the path to the directory you created in [Step 1](#): the directory that contains the files to be uploaded. For example:

```
in.tftpd -l -s /tftpboot/your_directory_name
```

A.2 In a Windows Environment

You can find several options online for setting up a Windows TFTP server. This example explains how to use the Solarwinds freeware TFTP server, which you can download at:

<http://www.cyberdata.net/support/voip/solarwinds.html>

To set up a TFTP server on Windows:

1. Install and start the software.
2. Select **File/Configure/Security** tab/**Transmit Only**.
3. Make a note of the default directory name, and then move the firmware files to be uploaded to that directory.

Appendix B: Troubleshooting/Technical Support

B.1 Frequently Asked Questions (FAQ)

To see a list of frequently asked questions, go to the following URL:

<http://www.cyberdata.net/products/voip/digitalanalog/singlewirepagingadapter/faqs.html>

B.2 Documentation

The documentation for this product is released in an English language version only. You can download PDF copies of CyberData product documentation by going to the following URL:

<http://www.cyberdata.net/products/voip/digitalanalog/singlewirepagingadapter/docs.html>

B.3 Contact Information

Contact	<p>CyberData Corporation 3 Justin Court Monterey, CA 93940 USA www.CyberData.net Phone: 800-CYBERDATA (800-292-3732) Fax: 831-373-4193</p>
Sales	<p>Sales 831-373-2601 Extension 334</p>
Technical Support	<p>The fastest way to get technical support for your VoIP product is to submit a VoIP Technical Support form at the following website:</p> <p>http://support.cyberdata.net/</p> <p>The Support Form initiates a ticket which CyberData uses for tracking customer requests. Most importantly, the Support Form tells us which PBX system and software version that you are using, the make and model of the switch, and other important information. This information is essential for troubleshooting. Please also include as much detail as possible in the Comments section of the Support Form.</p> <p>Phone: (831) 373-2601, Ext. 333 Email: support@cyberdata.net</p>
Returned Materials Authorization	<p>To return the product, contact the Returned Materials Authorization (RMA) department:</p> <p>Phone: 831-373-2601, Extension 136 Email: RMA@CyberData.net</p> <p>When returning a product to CyberData, an approved CyberData RMA number must be printed on the outside of the original shipping package. Also, RMA numbers require an active VoIP Technical Support ticket number. A product will not be accepted for return without an approved RMA number. Send the product, in its original package, to the following address:</p> <p>CyberData Corporation 3 Justin Court Monterey, CA 93940 Attention: RMA "your RMA number"</p>
RMA Status Form	<p>If you need to inquire about the repair status of your product(s), please use the CyberData RMA Status form at the following web address:</p> <p>http://support.cyberdata.net/</p>

B.4 Warranty and RMA Information

The most recent warranty and RMA information is available at the following website address:

<http://support.cyberdata.net/>

Index

Symbols

+48V DC power supply 10

Numerics

100 Mbps indicator light 12

A

activity light 12
 address, configuration login 19
 addressing
 DHCP 31
 static 31
 admin username and password 19
 audio configuration 45
 night ring tone parameter 49
 audio configuration page 45
 audio ground reference 8
 audio output 8
 authenticate ID and password for SIP server
 registration 36
 autoprovision at time (HHMMSS) 59
 autoprovision when idle (in minutes > 10) 59
 autoprovisioning 60
 download template button 60
 autoprovisioning autoupdate (in minutes) 59
 autoprovisioning configuration 58, 59
 autoprovisioning filename 59
 autoprovisioning server (IP Address) 59

B

backup SIP server 1 33
 backup SIP server 2 33
 backup SIP servers, SIP server
 backups 33

C

cat 5 ethernet cable 10
 changing
 the web access password 23

changing default username and password for
 configuration GUI 19
 Chrome (web browser) 3
 Cisco SRST 33
 command interface 73
 commands 73
 configurable parameters 24, 30, 33
 configuration
 using Web interface 15
 configuration page
 configurable parameters 24, 30
 connecting the SIP paging adapter 7
 connection speed 12
 verifying 12
 connector (removable) 9
 contact information 88
 contact information for CyberData 88
 current network settings 30
 current settings, reviewing 22
 CyberData contact information 88
 CyberData support limited to IP endpoint functionality 80

D

default
 gateway 14, 15
 IP address 14, 15
 subnet mask 14, 15
 username and password 14, 15
 default gateway 14, 15, 30
 default gateway for static addressing 31
 default login address 19
 default password for configuration GUI 19
 default settings, restoring 14
 default username and password for configuration GUI 19
 device configuration 23
 device configuration parameters 59
 the device configuration page 58
 device configuration page 23
 device configuration parameters 24
 device configuration password
 changing for web configuration access 23
 DHCP addressing 31
 dimensions 3, 4
 discovery utility program 19
 DNS server 30
 door sensor 48, 49
 download autoprovisioning template button 60
 drivers 87

E

enable night ring events 54
 ethernet port 10
 event configuration
 enable night ring events 54
 expiration time for SIP server lease 34, 35, 36
 export settings 21, 22

F

faqs 87
 fault sense input, sensor 8
 features 2
 Firefox (web browser) 3
 firmware
 where to get the latest firmware 70
 firmware, upgrade 70
 frequently asked questions (faqs) 87

G

get autoprovisioning template 60
 GMT table 27
 GMT time 27
 ground connection 7
 GUI username and password 19

H

http POST command 73

I

identifier names (PST, EDT, IST, MUT) 27
 identifying the device (when using InformaCast 4.0) 80
 identifying your product 1
 import settings 21, 22
 import/export settings 21, 22
 InformaCast
 Add IP Speaker Page 85
 IP Speaker Configuration page 81
 Test IP Speaker Page 83
 testing and identifying a Singlewire-enabled device 80
 Informacast linking to the wrong port and path 83
 input specifications 3
 intercom configuration page

configurable parameters 33
 Internet Explorer (web browser) 3
 IP address 14, 15, 30
 SIP server 36
 IP addressing
 default
 IP addressing setting 14, 15

L

lease, SIP server expiration time 34, 35, 36
 lengthy pages 41
 line input specifications 3
 line output specifications 3
 line-in 7
 line-out 7
 link light 12
 Linux, setting up a TFTP server on 86
 local SIP port 34, 36
 log in address 19
 logging in to configuration GUI 19

M

MGROUP
 MGROUP Name 40
 Mozilla Firefox (web browser) 3
 Multicast IP Address 40

N

navigation (web page) 16
 navigation table 16
 network activity, verifying 12
 network configuration page 29
 network parameters, configuring 29
 network setup button 29
 network, connecting to 11
 nightring tones 41
 Nightringer 69
 nightringer settings 34
 NTP server 24

O

orange link light 12
 output specifications 3
 overview 1

P

- page port 8
- page port output connections 8
- pages (lengthy) 41
- part number 3
- parts list 5
- password
 - configuration GUI 19
 - for SIP server login 33
 - restoring the default 14, 15
 - SIP server authentication 36
- pdf copies 87
- pin descriptions and functions 8
- point-to-point configuration 37
- polycom default channel 40
- polycom emergency channel 40
- polycom priority channel 40
- port
 - ethernet 10
 - local SIP 34, 36
 - remote SIP 34, 36
- posix timezone string
 - timezone string 24
- POST command 73
- power
 - connecting to 10
 - requirement 3
- priority
 - assigning 41
- product
 - configuring 15
- product overview 1

R

- reboot 71, 72
 - unregistering from SIP server during 36
- registration and expiration, SIP server
 - lease expiration 36
- regulatory compliance 3
- relay 8
- relay contact 8
- remote SIP port 34, 36
- required configuration for web access username and password 19
- restoring factory default settings 14
- ringtones 41
 - lengthy pages 41
- RMA returned materials authorization 88
- RMA status 88
- rport discovery setting, disabling 34

S

- Safari (web browser) 3
- sales 88
- server address, SIP 33
- service 88
- set time with external NTP server on boot 24
- Singlewire Informacast Server Web Interface 80
- Singlewire-enabled device
 - how to identify 1
- SIP
 - enable SIP operation 33
 - local SIP port 34
 - user ID 33
- SIP configuration page 32
- SIP configuration parameters
 - outbound proxy 34, 35
 - registration and expiration, SIP server lease 34, 35
 - unregister on reboot 34
 - user ID, SIP 33
- SIP registration 33
- SIP remote SIP port 34
- SIP server 33
 - password for login 33
 - unregister from 34
 - user ID for login 33
- SIP server configuration 33
- SIP setup button 32
- SRST 33
- static addressing 31
- status light 12
- subnet mask 14, 15, 30
- subnet mask static addressing 31

T

- tech support 88
- technical support 87
- technical support, contact information 88
- testing the device (when using InformaCast 4.0) 80
- time zone string examples 27

U

- unregister from SIP server 36
- upgrade firmware 70
- user ID
 - for SIP server login 33
- user ID for SIP server registration 36
- username
 - changing for web configuration access 23
 - restoring the default 14, 15

username for configuration GUI 19
utilities 87

V

verifying
 connection speed 12
 network activity 12
 network connectivity 12
VLAN ID 30
VLAN Priority 30
VLAN tagging support 30
VLAN tags 30

W

warranty and RMA returns page 88
warranty policy at CyberData 88
web access password 14, 15
web access username 14, 15
web configuration log in address 19
web page
 navigation 16
web page navigation 16
web-based configuration 15
weight 3
wget, free unix utility 73
Windows, setting up a TFTP server on 86