

# Singlewire InformaCast-enabled SIP Strobe

**CyberData**

The IP Endpoint Company



When installed in a Singlewire Notification environment, the wall-mounted SIP Strobe operates as a visual alerting device.

## Features

- InformaCast
- Meets ADA requirements for telephony signaling and notification
- Web-based setup
- SingleWire GPI/O input and relay control
- PoE-powered

## Use areas include:

- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office



## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible and InformaCast v4.0 and later
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply
Light power	Up to 90 candela (user-selectable)
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
On-Board Relay	1A at 30 VDC
Operating Temperature	-40° C to +55° C (-40° F to 131° F)
Payload Types	G711, A-law and $\mu$ -law

Dimensions	4.5 inches [115 mm] Length 2.1 inches [55 mm] Width 4.5 inches [115 mm] Height
------------	--

Warranty	2 years limited
----------	-----------------


Weight	1.0 lbs. (0.45 kg)
Boxed Weight	2.0 lbs. (0.90 kg)

Part Number	011244
-------------	--------

**CyberData**  
The IP Endpoint Company

# Singlewire InformaCast-enabled SIP Strobe

## Typical Installation

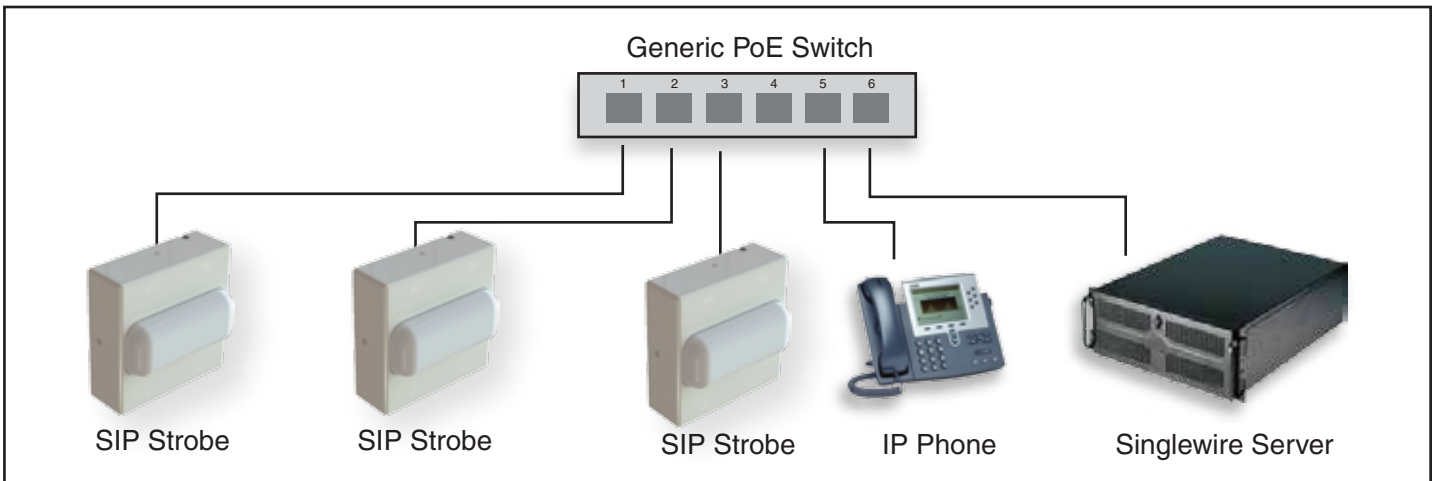

## Mounting Options

