

## CyberData Door Strike Intermediate Relay Module

When connecting a CyberData Intercom to an electronic door lock, the high current side of the door strike required a separately-wired relay and protection diode.

The CyberData Door Strike Intermediate Relay Module eliminates the need for the customer to source a separate relay and makes wiring an electronic door strike easier.




### Features

- Direct connection to CyberData Intercom products
- 4 wire interface
- 12 Amp relay
- NO/NC contacts
- Opto-isolated sense input
- Power is provided from relay voltage
- Wall mounting
- Cable strain relief
- Lock status LED

### Specifications

Power Input	5V to 60V DC / 9V to 250V AC
Operating temp.	-10° C to 50° C (14° F to 122° F)
Relay Voltage/Current	12A@250VAC/12A@24VDC
Maximum distance from Intercom	50 feet
Dimensions	6.000" x 3.570" x 1.575"
Warranty	24 months
Boxed Weight	2.0 lbs.
Part Number	011269

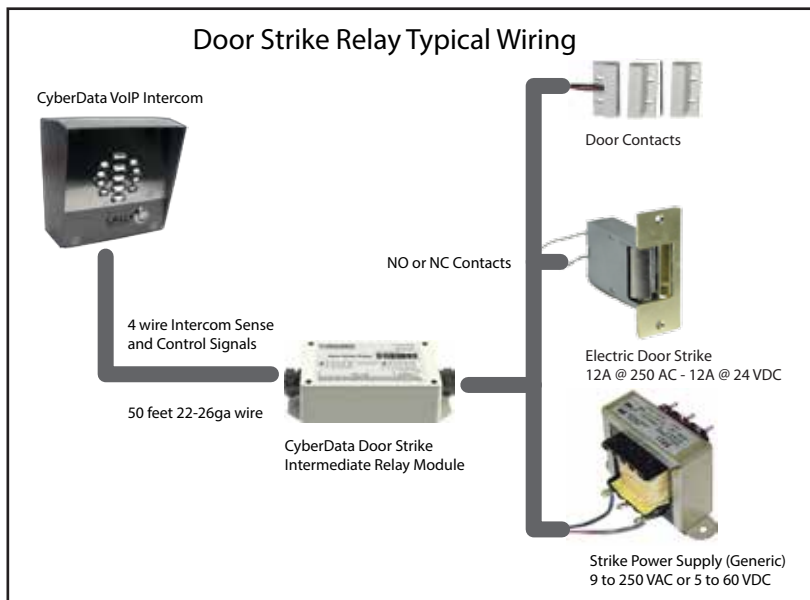

# CyberData Door Strike Intermediate Relay Module

