

SIP Indoor Intercom Flush Mount

CyberData

The IP Endpoint Company

The SIP Indoor Intercom Flush Mount delivers two-way communication and secure access control for your VoIP phone system. This device is perfect for settings such as commercial/residential facilities, schools and universities, retail establishments, warehouse and manufacturing plants.

CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData VoIP Products.

Features

- Enhanced acoustic echo canceler
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Streamlined case design
- Network web management and firmware download
- Network adjustable speaker volume
- Concurrent SIP and multicast paging
- Dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Downloadable alert, ringtones and callout messages



Specifications

| | |
|---------------------|--|
| Ethernet I/F | 10/100 Mbps |
| Protocol | SIP RFC 3261 Compatible |
| Power Input | PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included) |
| Speaker Output | 2 Watts Peak Power |
| On-Board Relay | 1A @ 30 VDC |
| Payload Types | G.711 a-law, G.711 μ -law, and G.722 |
| Operating Range | Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing |
| Storage Temperature | Temperature: -40° C to 70° C (-40° F to 158° F) |
| Storage Altitude | Up to 15,000 ft. (4573 m) |
| Dimensions* | 6.840 inches [173.7 mm] Length 2.419 inches [61.4 mm] Width 5.860 inches [148.8 mm] Height |
| Weight | 1.0 lbs. [0.45 kg] |
| Boxed Weight | 2.0 lbs. [0.90 kg] |
| Compliance | CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant |
| Warranty | 2 Years Limited |
| Part Number | 011272 |

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

Related Products:



011375 Network Dual Door Strike Relay



011269 Door Strike Intermediate Relay Module




011288 Auxiliary RGB (Multi-Color) Strobe Kit

SIP Indoor Intercom Flush Mount

Typical Installation

Trigger electric door strike with a predetermined key code from the IP phone

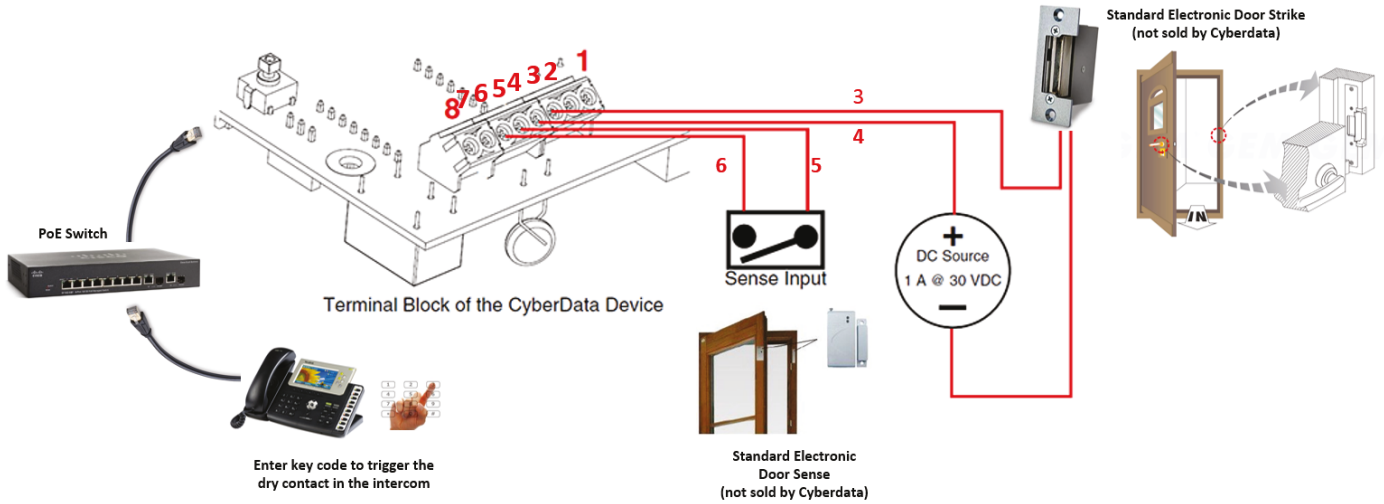

Typical Installation - Auxiliary RGB Strobe Kit

Generic PoE Switch

