

Intercom Connections



Speaker Connections

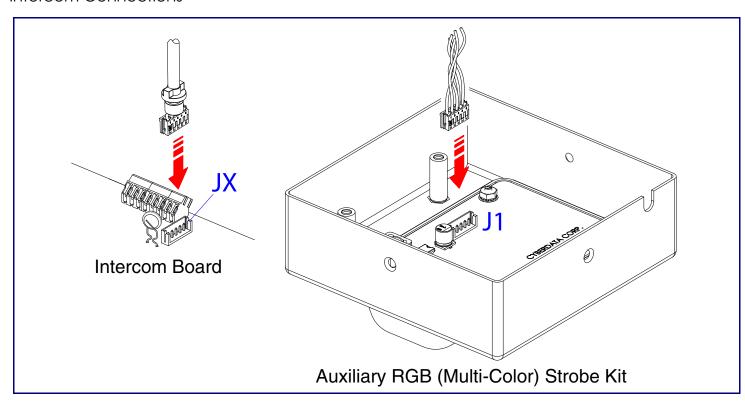


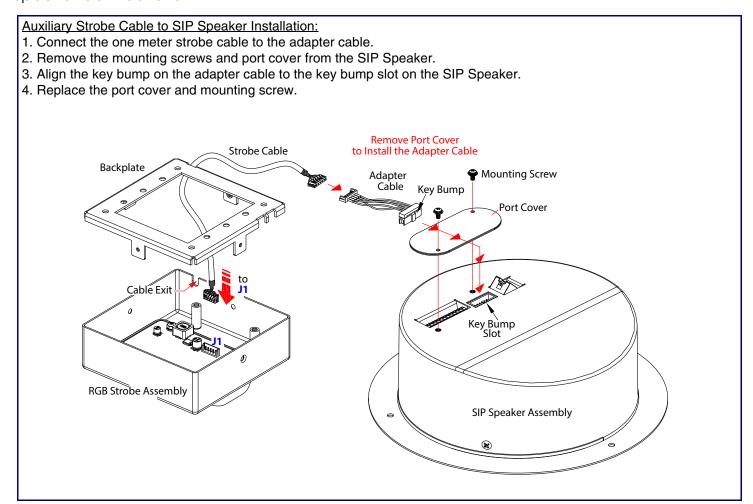

CyberData Installation Quick Reference

Auxiliary RGB (Multi-Color) Strobe Kit





Parts List

• (1) Auxiliary RGB Strobe Kit

• (1) 3.28 feet [1 meter] cable

Getting Started

• Download the Operations Guide PDF file, from the Downloads tab at:

http://www.cyberdata.net/voip/011288/

Features

Meets ADA requirements for telephony signaling and notification

Activates from a CyberData IP endpoint

Mailbox Message Waiting Indication

· Multicast activation

Specifications

Specifications	
Power Input	Supplied by the supported CyberData VoIP endpoint
Flash rate	4 scenes available
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Dimensions	4.5 inches [115 mm] Length
	2.1 inches [55 mm] Width
	4.5 inches [115 mm] Height
Weight	1.0 lbs. (0.45 kg)
Boxed Weight	2.0 lbs. (0.90 kg)
Part Number	011288
·	

Contacting CyberData

Corporate Headquarters

CyberData Corporation 3 Justin Court

Monterey, CA 93940, USA

Sales: 831-373-2601 ext. 334 Support: 831-373-2601 ext. 333

Support Website: https://support.cyberdata.net/

RMA Department Contact and Status: https://support.cyberdata.net/


Warranty Information: https://support.cyberdata.net/

Phone: 831-373-2601 Fax: 831-373-4193


Quick Reference

https://www.cyberdata.net/


Paging Amplifier Connections

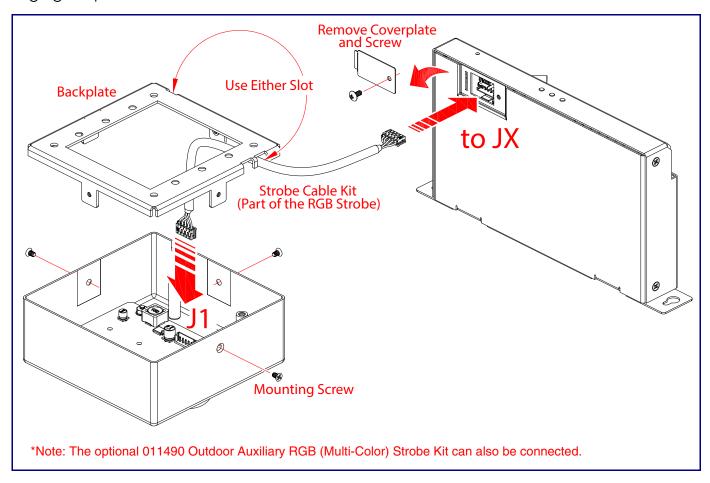


Strobe Connections Behind the Port Cover

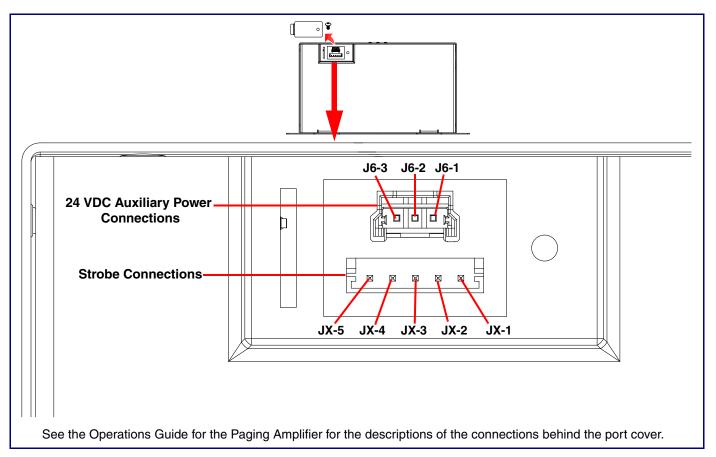

Mounting Option

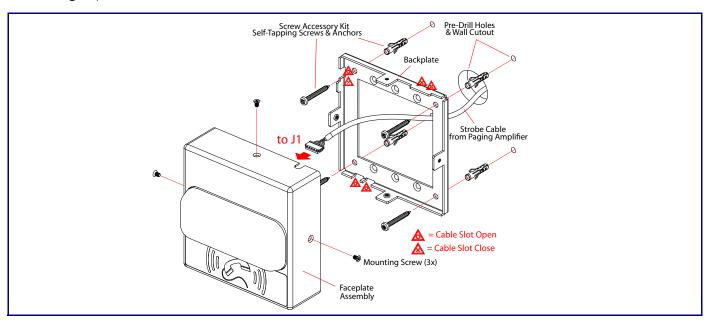

Maximum Recommended Wall Cutout Dimensions

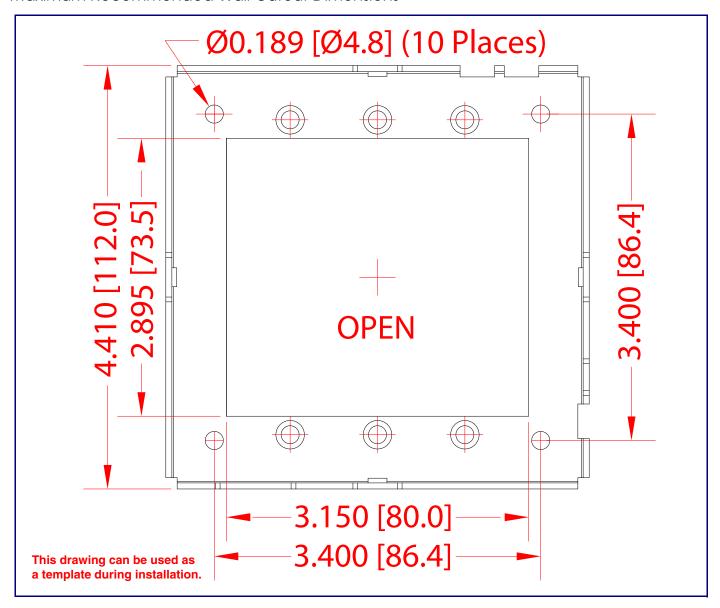

930831E