

The CyberData InformaCast Enabled Outdoor Intercom with Keypad can receive InformaCast notification messages, deliver two-way communication and provide secure access control for your VoIP phone system. This device is perfect for settings such as commercial or residential facilities, schools, universities, retail establishments, warehouses and manufacturing plants.

InformaCast Features

- Capable of receiving Singlewire InformaCast notification messages
- Compatible with Singlewire InformaCast v12.1, including support for downloading SIP credentials from InformaCast
- Supports Singlewire InformaCast High Quality Audio

Standard Features

- Compatible with Cisco Call Manager
- TLS 1.2 enhanced security for IP Endpoints in a local or cloud-based environment
- Dry contact relay configurable in all modes for secure access or auxiliary control
- Security mode allows for up to 500 user codes with configurable times and blacklisting plus extension dialing
- 12-key keypad with backlight
- Programmable speed dial
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Enhanced acoustic echo canceling
- Network web management and firmware download
- Network adjustable volume
- Concurrent SIP and multicast paging
- Door closure and tamper alert signal
- Downloadable alert, ringtones and callout messages



Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Notification Software	Singlewire InformaCast v4.0 and above
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Speaker Output	2 Watts Peak Power
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711 μ-law, G.722, and G.729
Network Security	TLS/SSL 1.2
IP Rating	IP65
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	Temperature: -40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	7.480 inch [190 mm] Length 2.284 inch [58 mm] Width 5.118 inch [130 mm] Height
Weight	2.8 lbs. [1.27 kg]
Boxed Weight	4.0 lbs. [1.81 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 Years Limited
Part Number	011310

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.


Related Products:




011375 Network Dual Door Strike Relay



011269 Door Strike Intermediate Relay Module




011215 Outdoor Keypad Intercom Shroud




011442 Flush Mount Kit, 2x

InformaCast® Enabled Outdoor Intercom with Keypad

Typical Installation

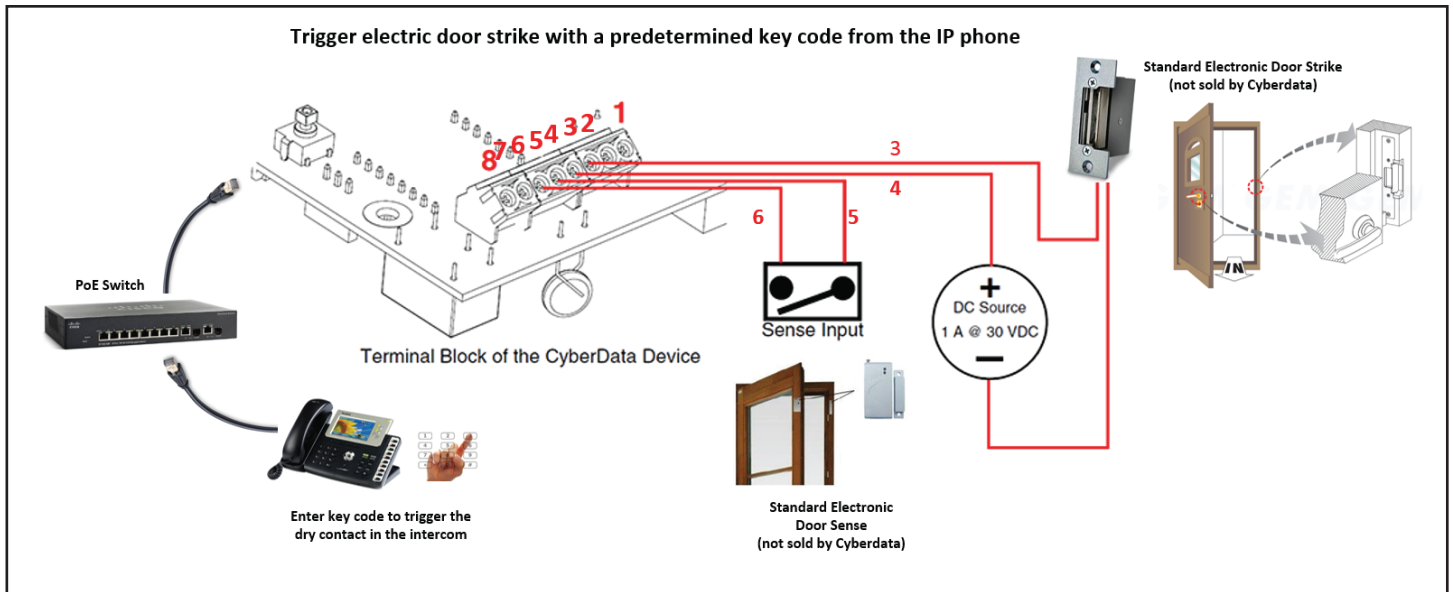

Connection Example

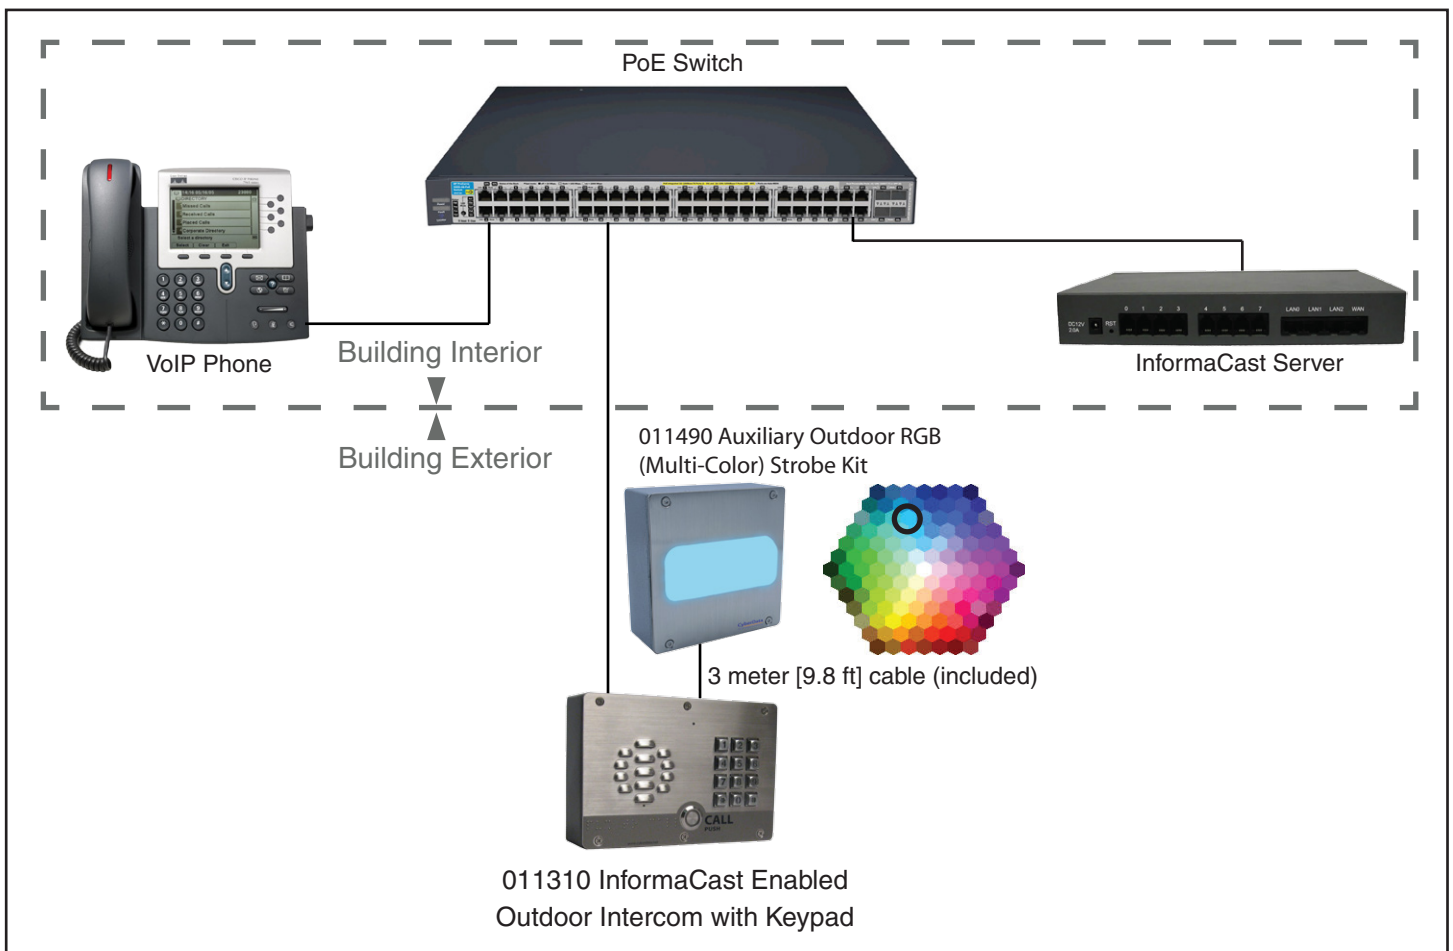

InformaCast® Enabled Outdoor Intercom with Keypad

