InformaCast® Enabled Speaker with Talk-Back




The IP Endpoint Company

The CyberData InformaCast Enabled Speaker with Talk-Back is a Power-over-Ethernet (PoE 802.3af/802.3at) and Voice-over-IP (VoIP) public address indoor speaker designed for use with Singlewire's InformaCast paging and emergency notification software. Easily connecting into existing local area networks with a single Ethernet cable connection, its small footprint and minimal depth allows it to be discreetly mounted almost anywhere with multiple mounting options available.

The Talk-Back feature, when enabled, provides full-duplex two-way conversations in indoor settings such as classrooms, offices, medical facilities and clinics. When used with the Remote Call Button, calls to a predetermined extension can be initiated from the room with the speaker. Alternatively, a call can be placed to the speaker to initiate either a page or two-way conversation. This feature also allows for speaker health check.

Features


- Compatible with Singlewire InformaCast, including support for downloading SIP credentials from InformaCast
- Supports Singlewire InformaCast High Quality Audio
- Simultaneous InformaCast, SIP and multicast
- Talk-back capability can be enabled during provisioning or from the web page
- Full duplex audio with configurable echo cancelling
- Adaptive half duplex audio with configurable VOX (Voice-Operated Switch) settings
- Half duplex push to talk audio from the far side using the phone's keypad or from the Speaker side using CyberData's Remote Call Button
- Ambient noise compensation, where the device will measure the ambient sound level in the area and adjust the volume of the speaker accordingly
- Audio health check to verify hardware functionality that can be scheduled or launched manually
- Configurable event generation for device health and status monitoring
- Supports a Monitor Mode
- Paging prioritization
- User-uploadable ring and alert tones
- Support for security code to prevent unwanted SIP calls
- Can receive pages directly from Poly phones as well as other devices that can send standard multicast
- Loud/Night Ringer function second SIP extension
- Support for 10 multicast paging groups
- Can drive an optional external analog speaker for greater coverage
- Can support an Auxiliary Strobe for ADA-compliant visual notification
- DTMF-controlled relay
- Line-out connection
- Network volume control
- TLS 1.2 and SRTP enhanced security for IP Endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS web based configuration
- 802.11q VLAN tagging
- Support for Cisco ŠRŠT/multiple SIP servers for redundancy

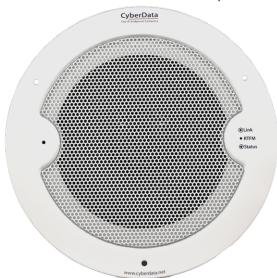


Specifications	
Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Notification Software	Singlewire InformaCast v4.0 and above
Power Input	PoE 802.3af/802.3at compliant
Audio Output	802.3af - SPL 103 dB @ 1 meter 802.3at - SPL 105 dB @ 1 meter
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711µ-law, G.722, and G.729
Network Security	TLS, SRTP, HTTPS
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature Storage Altitude	-40° C to 70° C (-40° F to 158° F) Up to 15,000 ft. (4573 m)
Dimensions*	9.055 in. [230 mm] Grill Diameter 7.25 in. [184.2 mm] Can Diameter 3.08 in. [76.11 mm] Depth
Weight Boxed Weight	3.0 lbs [1.36 kg] 4.0 lbs. [1.81 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive EN 62368-1; RoHS Compliant; FCC Part 15 Class; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	2 Year Limited
Part Number	011396

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.


InformaCast® Enabled Speaker with Talk-Back

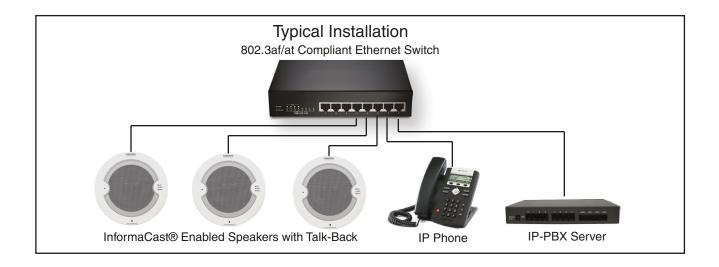

Speaker with Extra Speaker Connection

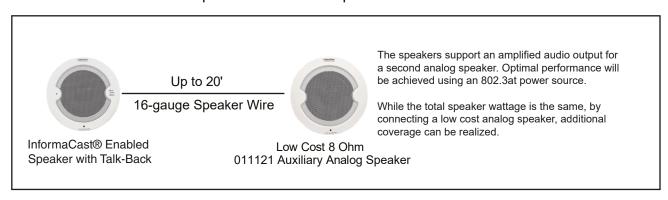


Speaker with Auxiliary RGB (Multi-Color) Strobe Kit

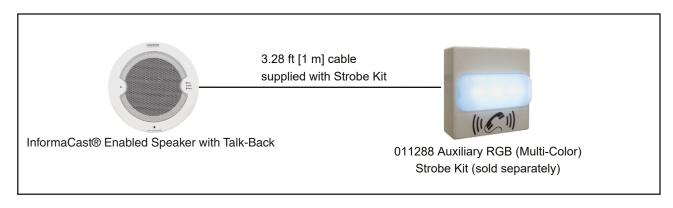

InformaCast® Enabled Speaker with Talk-Back

Dimensions

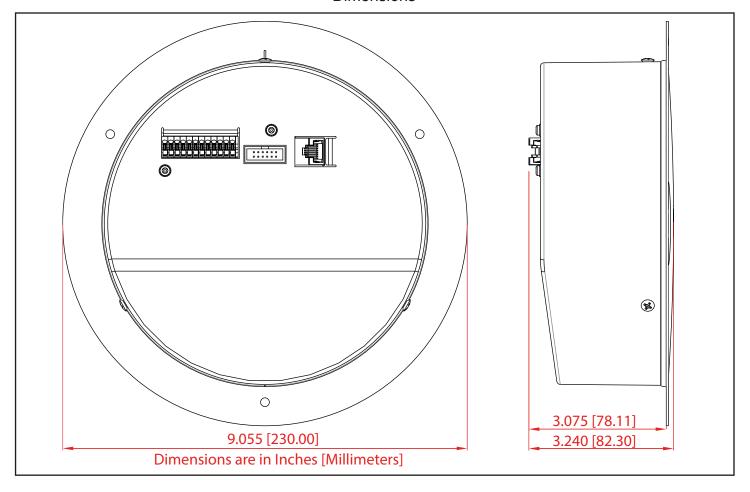

Related Products

