



CyberData Installation Quick Reference The IP Endpoint Company InformaCast Enabled Talk-Back Speaker SIP Compliant

011400*


*Replaces the 011183 number.



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.


Typical System Installation

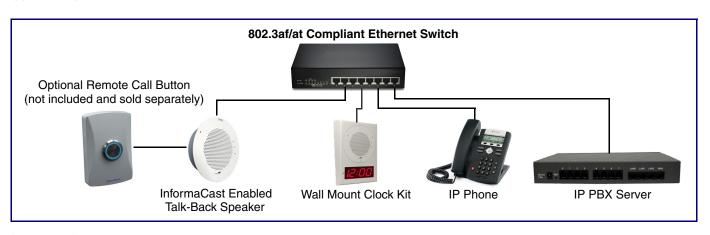


Getting Started

- Download the Operations Guide PDF file, from the **Downloads** tab at the following webpage:
 - https://www.cyberdata.net/products/011399-011400
- Create a plan for the locations of your InformaCast Enabled Talk-Back Speakers.
- WARNING: This product should be installed by a licensed electrician according to all local electrical and building codes.
- WARNING: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation instructions.
- WARNING: The PoE connector is intended for intra-building connections only and does not route to the outside plant.
- WARNING: This enclosure is not rated for any AC voltages!


Parts

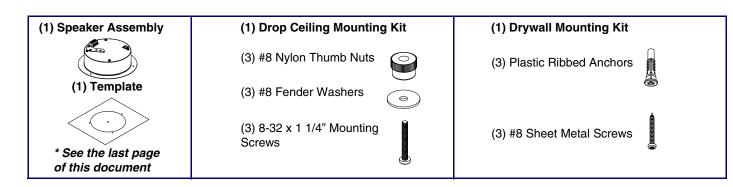


Dimensions and Connections

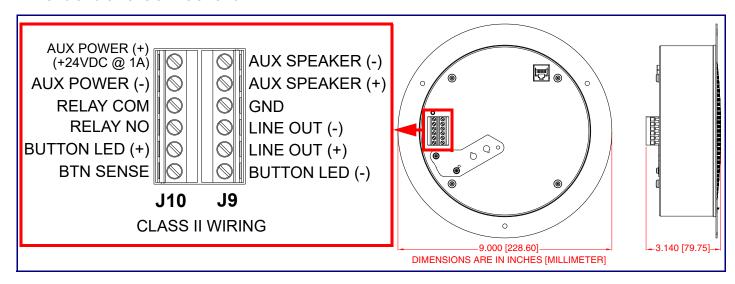


Connecting Power

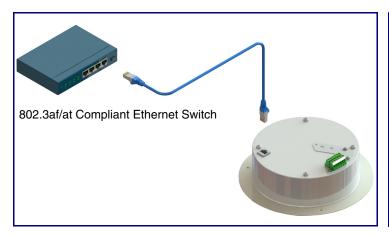


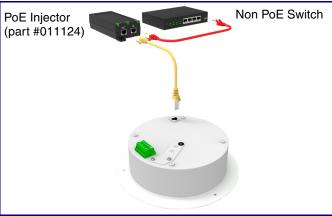

Features

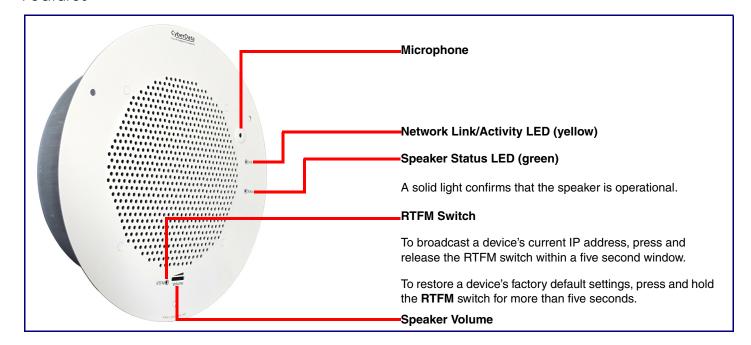

Mounting

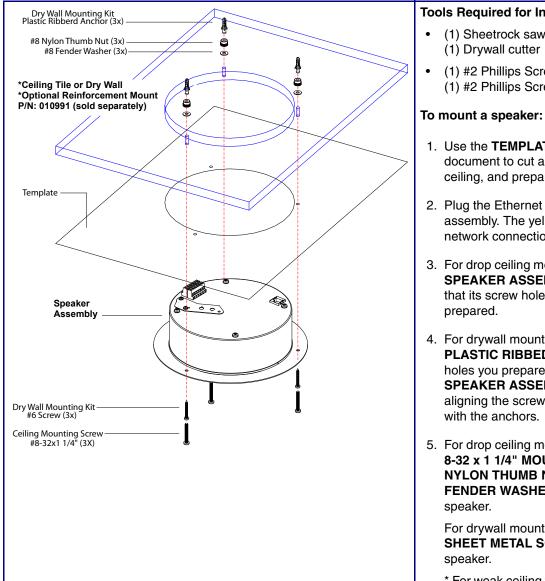

Tools Required for Installation:

- (1) Sheetrock saw or
- (1) #2 Phillips Screwdriver or
- (1) #2 Phillips Screwdriver Hex Bit
- 1. Use the **TEMPLATE** on the back of this document to cut a hole in the wall or ceiling, and prepare holes for the screws.
- 2. Plug the Ethernet cable into the speaker assembly. The yellow light verifies the network connection.
- 3. For drop ceiling mounting, position the IP SPEAKER ASSEMBLY in the ceiling so that its screw holes align with those you
- 4. For drywall mounting, place the three **PLASTIC RIBBED ANCHORS** in the holes you prepared, and position the IP SPEAKER ASSEMBLY over them, aligning the screw holes in the assembly
- 5. For drop ceiling mounting*, use the three 8-32 x 1 1/4" MOUNTING SCREWS, #8 NYLON THUMB NUTS, and #8 FENDER WASHERS to secure the

For drywall mounting, use the three #8 SHEET METAL SCREWS to secure the

* For weak ceiling tile, CyberData offers a reinforcing mount (CyberData part number 010991).

Contacting CyberData

Corporate Headquarters

CyberData Corporation 3 Justin Court

Monterey, CA 93940, USA

Phone: 831-373-2601 Fax: 831-373-4193 http://www.cyberdata.net/

Quick Reference

Sales: (831) 373-2601 ext. 334 Support: 831-373-2601 ext. 333

Support Website: http://support.cyberdata.net/ RMA Department: (831) 373-2601 ext. 136 RMA Email: RMA@CyberData.net

RMA Status: http://support.cyberdata.net/ Warranty Information: http://support.cyberdata.net/