





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

Dukane 1A1335 through 1A1400 Amplifier Models

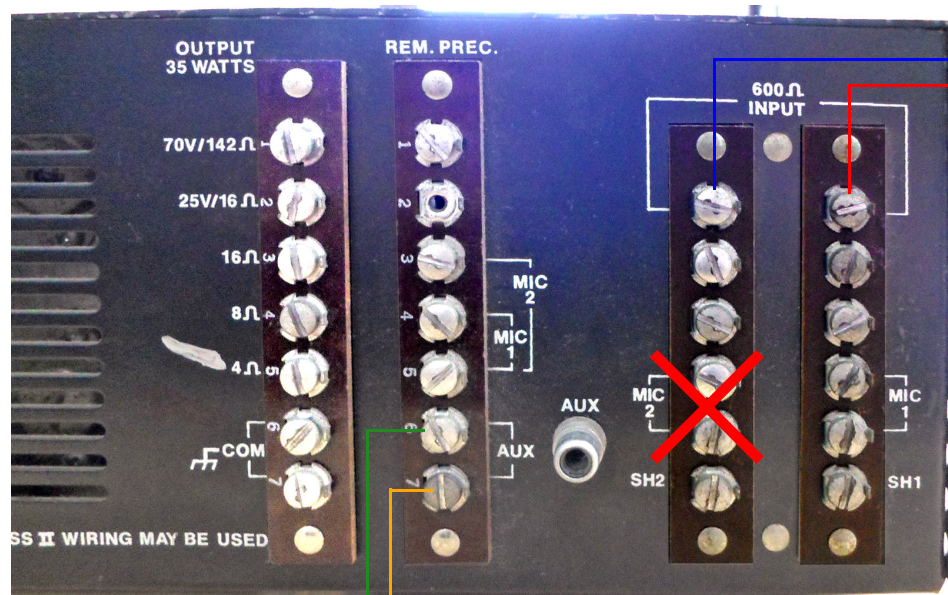

SIP Paging Server Connections

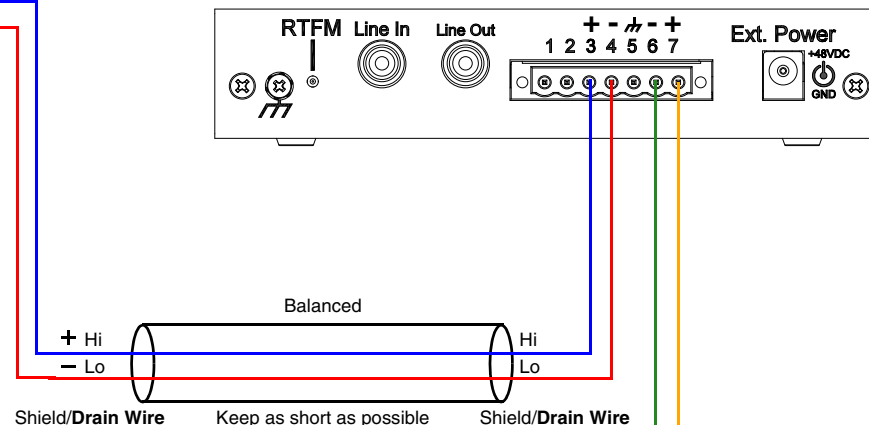

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

Notes

TELEPHONE: A 600 ohm input from a paging adapter may be connected to terminal 1 on TB 101 and TB 102 with the shield to terminal 6 on TB 102. When the telephone input is used, it is controlled by MIC 2 controls, and a microphone should NOT be connected to the MIC 2 input.

Check the **Enable Relay on Local Audio** checkbox on the device tab of the web interface, click on the **Save** button, and then click on the **Reboot** button.

2 conductor, shielded speaker wire is recommended.