


Bogen CC4041 Amplifier

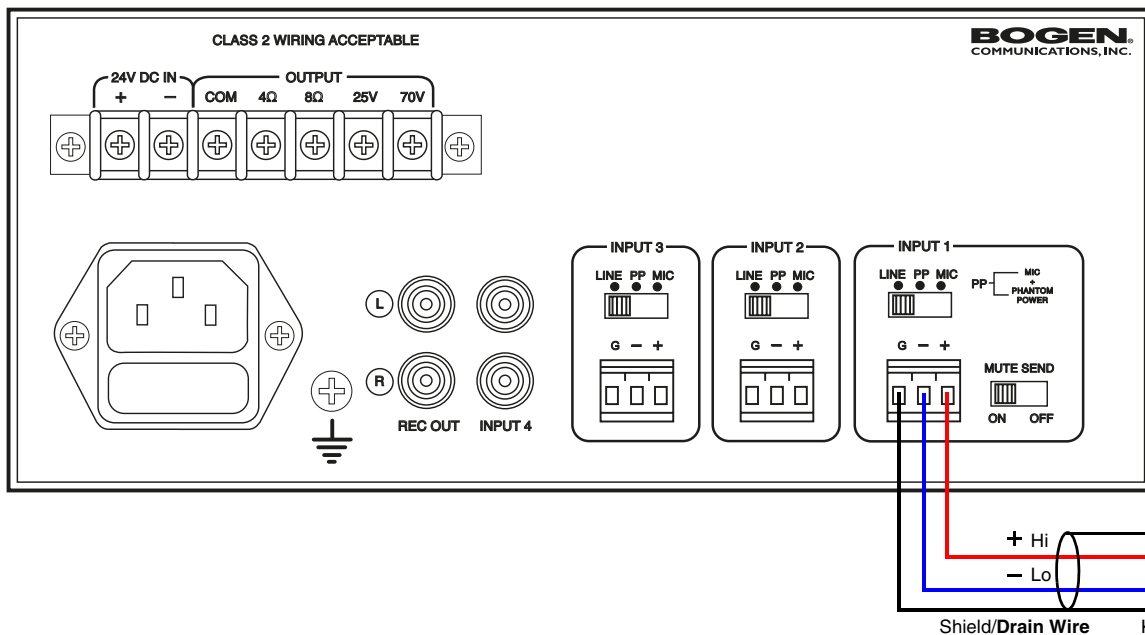


GENERAL ALERT

Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

InformaCast Enabled Paging Adapter

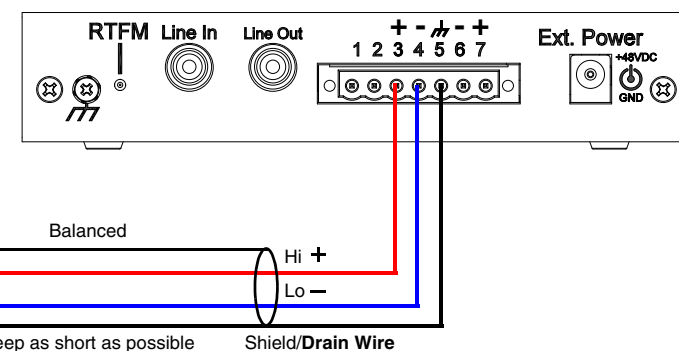

Page Port Connections

Pin	Description
1	Fault Sense Input (Common)
2	Fault Sense Input (Sense)
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

Notes:

The **INPUT 1** dip switch must be set to **LINE**.

The **MUTE SEND** dip switch must be set to **ON**.

2-conductor, shielded speaker wire is recommended.