

To mount the enclosure:

1. Prepare holes for the screws.
2. Plug in the power adapter and use the **Power (PWR)** LED to verify that the power is on.
3. Plug the ethernet cable into the device. The **Link/Activity (Link/Act.)** LED verifies the network connection.
4. For wall mounting, use the three #8 x 1-1/4-inch Pan Head Phillips Self-Tapping Screws.



Installation Quick Reference
Syn-Apps enabled Loudspeaker Amplifier (PoE)
011413



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.


Parts

<p>(1) Assembly</p> <p>(1) Enclosure</p>	<p>(1) Wall Mounting Kit</p> <p>(3) #8 Plastic Anchors</p> <p>(3) #8 x 1-1/4" Pan Head Phillips Self-Tapping Screws</p>
	<p>Additional Parts</p> <p>(1) CAT 5e/CAT6 cable</p> <p>(1) PoE Power Injector</p>

Contacting Syn-Apps

<p>Corporate Headquarters</p> <p>Syn-Apps LLC 2812 N Norwalk Suite 112 Mesa, AZ 85215</p> <p>Phone: 480-664-6071 / 866-664-6071 Fax: 480-659-8999 / 866-659-8999</p>	<p>Website: www.syn-apps.com</p> <p>Sales: sales@syn-apps.net</p> <p>Support: http://www.syn-apps.com/resources/support Email: http://www.syn-apps.com/contact-us</p>
--	---

Features

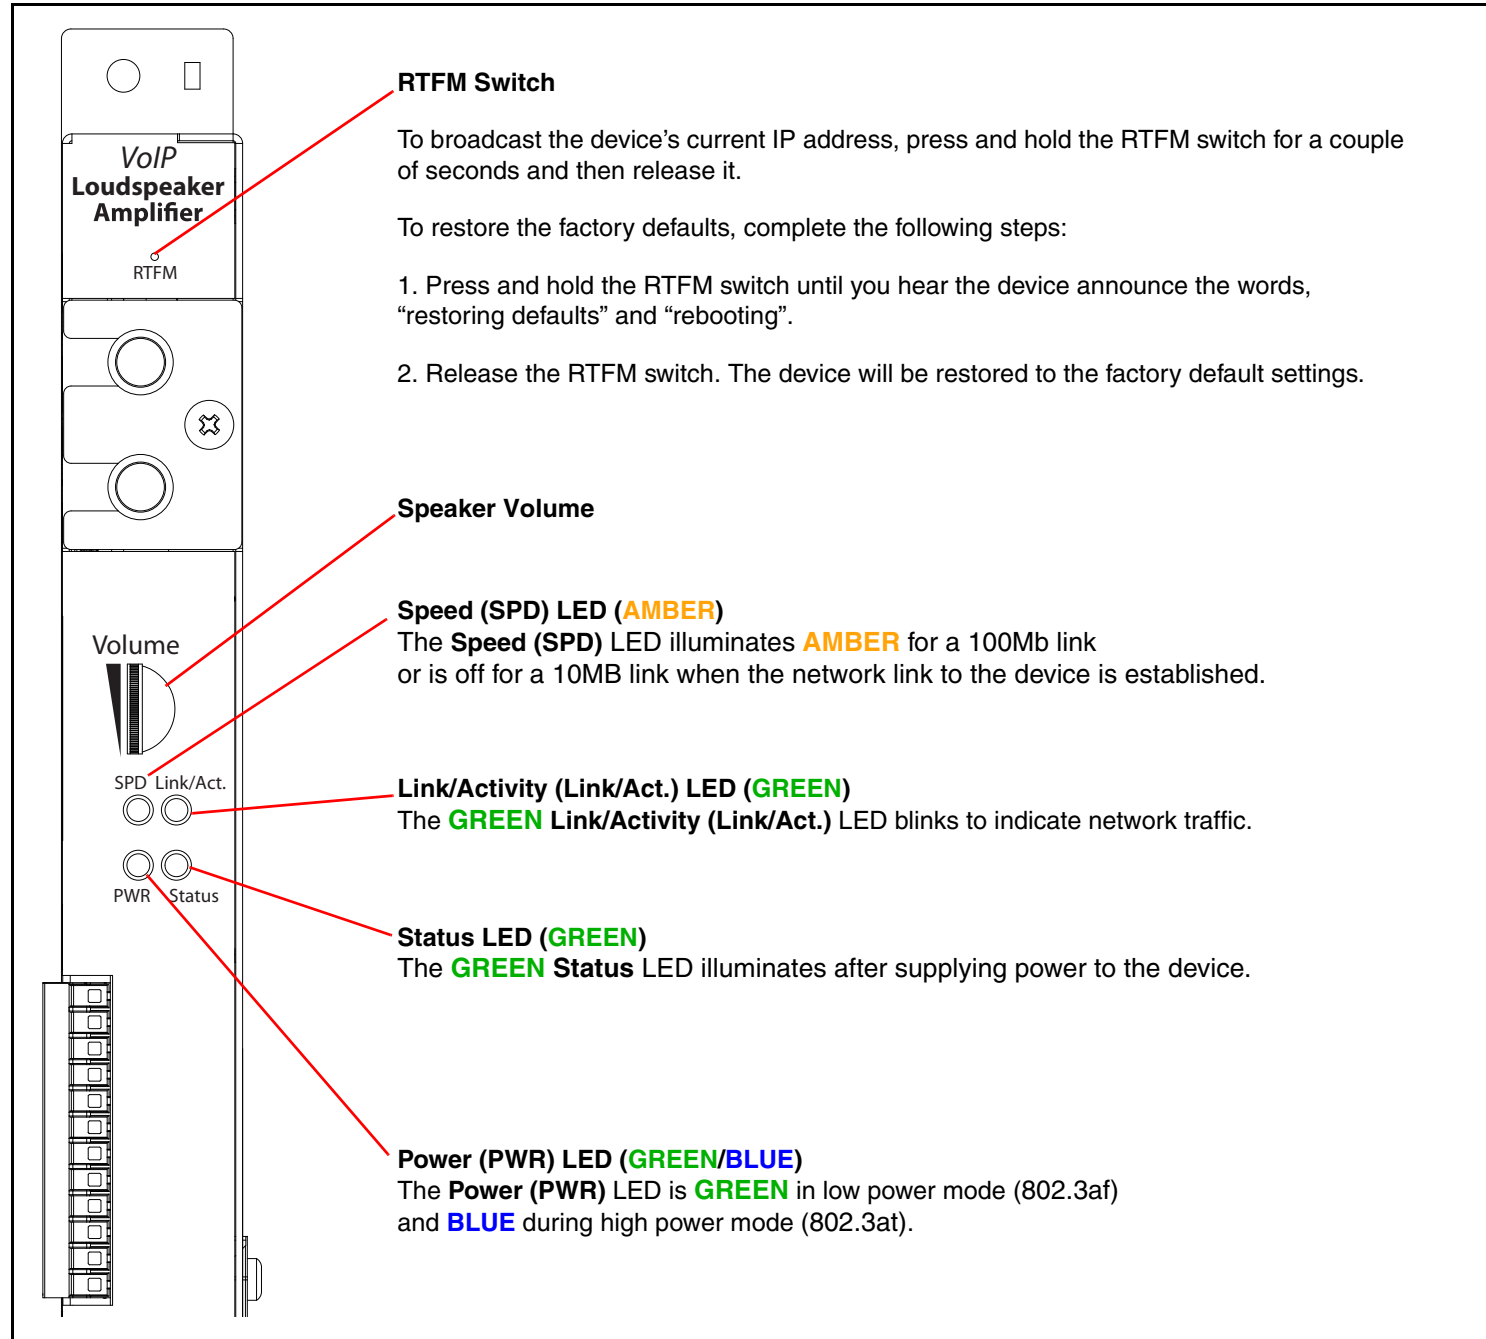

Dimensions and Mounting Template

