

# Analog Wall Mount Speaker

## 25V/70V/8 Ohm


### 011589




#### Getting Started

- This product ships in 70V mode with the power tap setting value of 1 (1.25W) selected.
- **WARNING:** Do not use the 8 Ohm setting in a constant voltage application.
- **WARNING:** This product must be set to the appropriate voltage depending on the settings of the amplifier. Using a speaker set to 25V in a 70V system will cause damage.
- **WARNING:** This device is not rated for any AC voltages!

#### Dimensions

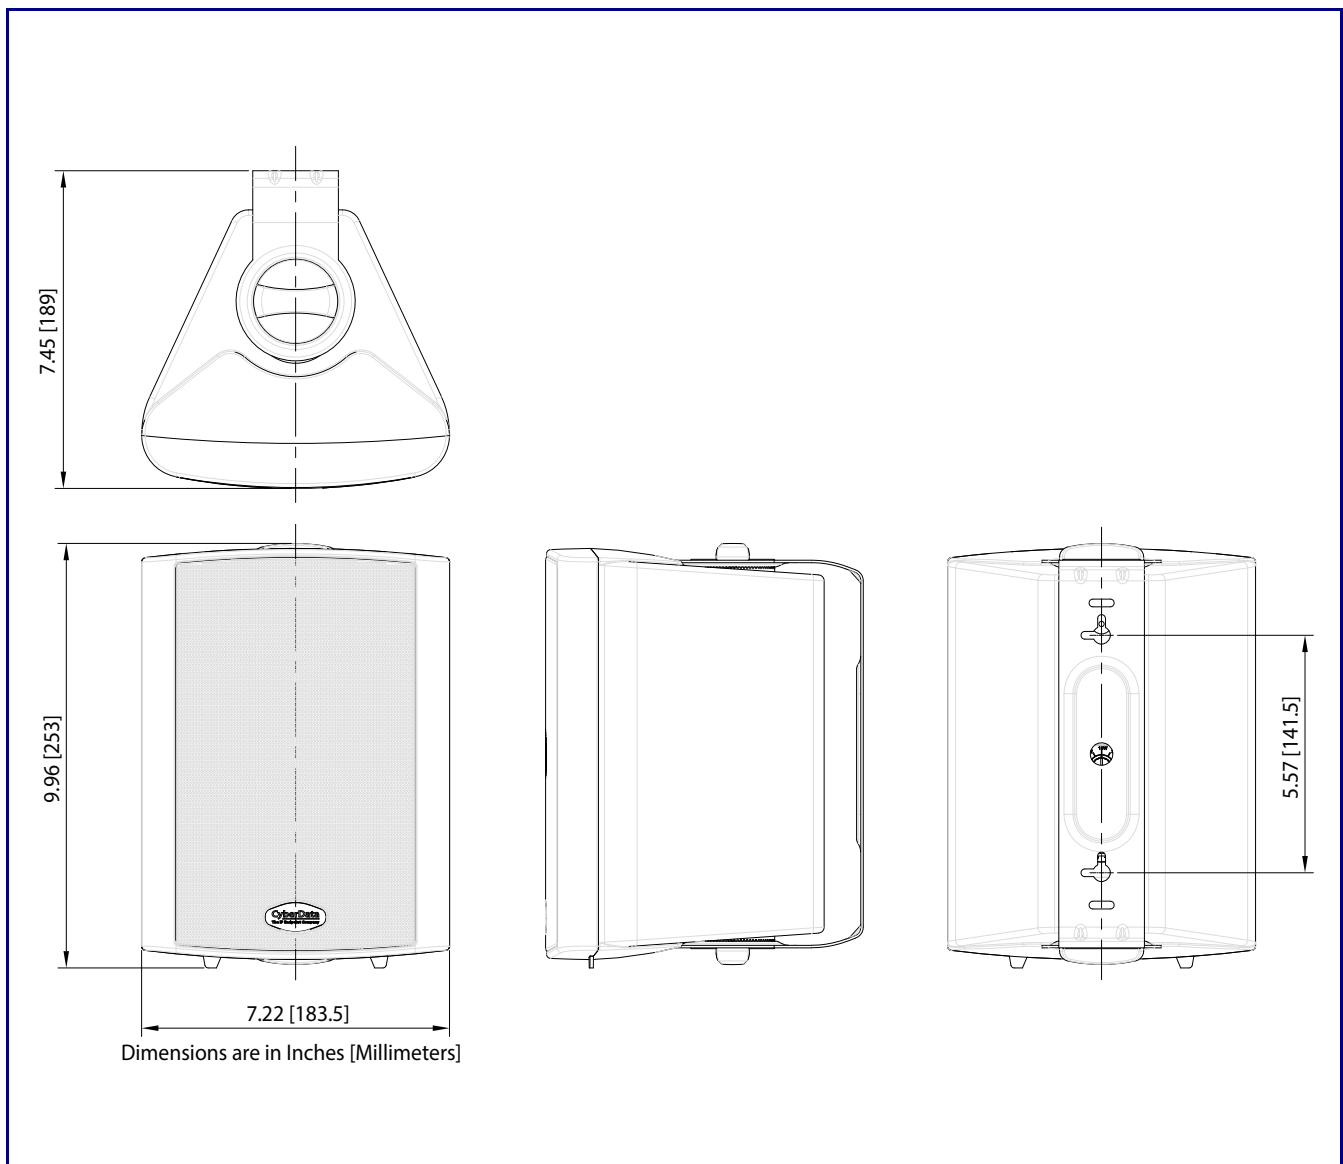

## Typical Installation

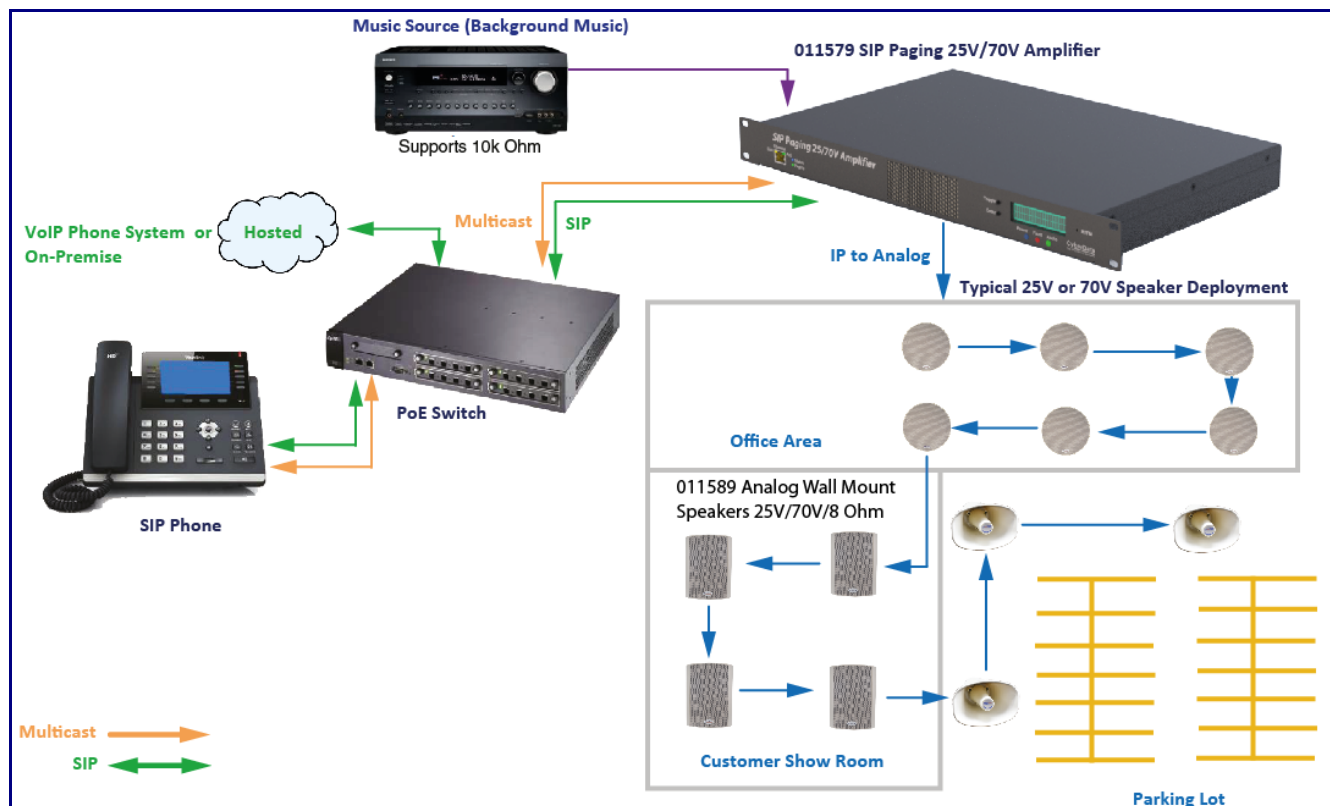

### Analog Wall Mount Speaker db Output Levels\*

Voltage	Power Tap Settings			
	1.25W	3.75W	10W	30W
25V	85.4	90	93.6	97.8
70V	85.9	90.5	94.4	98.8

\* dBC @ 1M and 1kHz



### Speaker Matrix Example

*Note: Configuration as pictured above*

	Qty	Power Tap	Total
Ceiling Speakers	6	3.75W	22.5W
Wallmount	4	10W	40W
Horns	3	15W	45W
			<b>107.5W</b>

## Contacting CyberData

### Corporate Headquarters

CyberData Corporation  
3 Justin Court  
Monterey, CA 93940, USA

Phone: 831-373-2601

Fax: 831-373-4193

<https://www.cyberdata.net/>

Sales: 831-373-2601 ext. 334

Support: 831-373-2601 ext. 333

Support Website: <https://support.cyberdata.net/>

RMA Department Contact and Status: <https://support.cyberdata.net/>

Warranty Information: <https://support.cyberdata.net/>