

Analog Wall Mount Speaker

25V/70V/8 Ohm


011589




Getting Started

- This product ships in 70V mode with the power tap setting value of 1 (1.25W) selected.
- **WARNING: Do not use the 8 Ohm setting in a constant voltage application.**
- **WARNING: This product must be set to the appropriate voltage depending on the settings of the amplifier. Using a speaker set to 25V in a 70V system will cause damage.**
- **WARNING: This device is not rated for any AC voltages!**

Dimensions

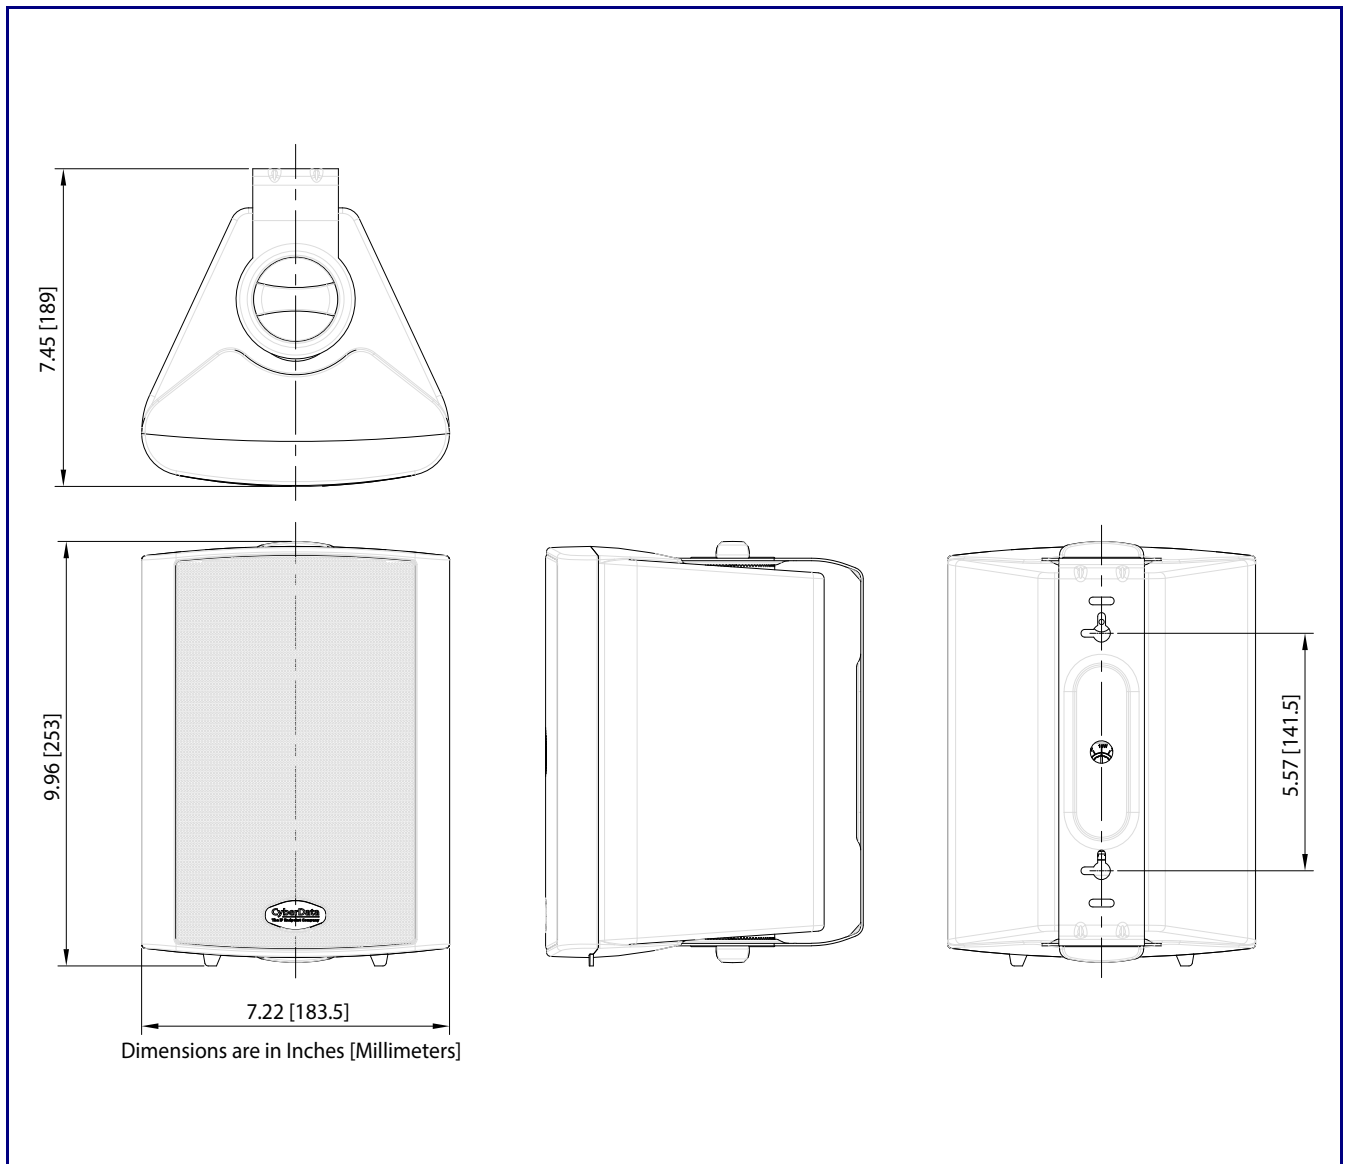

Typical Installation

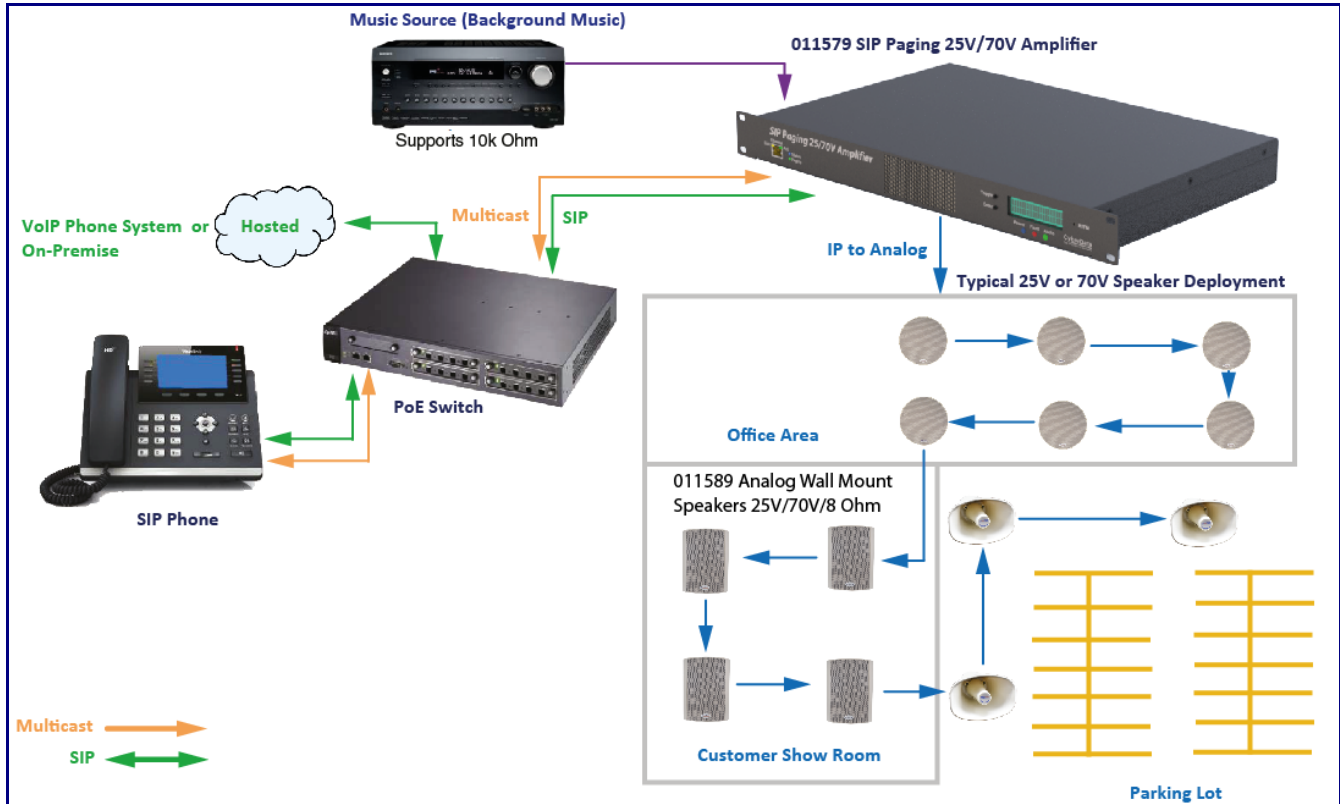

Analog Wall Mount Speaker db Output Levels*

Voltage	Power Tap Settings			
	1.25W	3.75W	10W	30W
25V	85.4	90	93.6	97.8
70V	85.9	90.5	94.4	98.8

* dBC @ 1M and 1kHz



Speaker Matrix Example

Note: Configuration as pictured above

	Qty	Power Tap	Total
Ceiling Speakers	6	3.75W	22.5W
Wallmount	4	10W	40W
Horns	3	15W	45W
			107.5W

For most installations we recommend the following:
16/2 Stranded In-Wall CL3R Speaker Wire with an Insulated Jacket.
 See the Operations Guide for more details.

Contacting CyberData

Corporate Headquarters

CyberData Corporation
 3 Justin Court
 Monterey, CA 93940, USA

Phone: 831-373-2601
 Fax: 831-373-4193

<https://www.cyberdata.net/>

Sales: 831-373-2601 ext. 334
 Support: 831-373-2601 ext. 333
 Support Website: <https://support.cyberdata.net/>
 RMA Department Contact and Status: <https://support.cyberdata.net/>
 Warranty Information: <https://support.cyberdata.net/>