



## Clarity SWM-15A

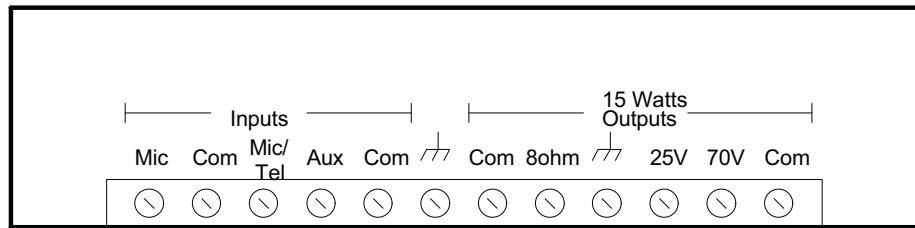

Strap

Page Port  
600 ohm  
Voice Path

## SIP Paging Adapter Connections

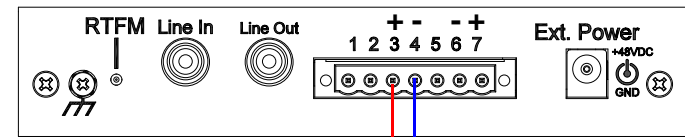

### Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output <sup>a</sup>
4	Negative 600-Ohm Audio Output <sup>a</sup>
5	Audio Ground Reference.
6	Relay Contact - Common <sup>b</sup>
7	Relay Contact - Normally Open <sup>b</sup>

### Notes

The unit has a Mic1/Tel switch that should be in the Tel position. When using the Tel Line input, connect audio page ports only like the CyberData SIP Paging Adapter 600 Ohm line-out (pins 3 and 4). Connect Tip to terminal 2 designated as COM, connect Ring to terminal 3 designated as Mic/Tel Line; strap terminal 1 to terminal 2.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.