

Mounting Options—Wall Mounting

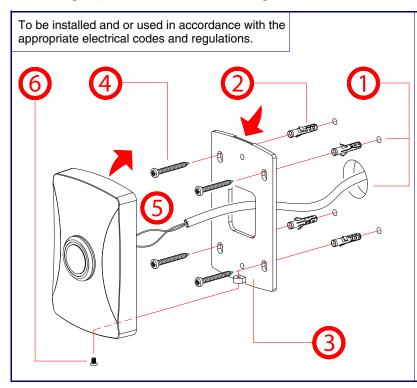

- 1. Prepare hole cutouts for both wires and the plasticribbed anchors. Use the provided **Mounting Template** or place the backplate directly onto the mounting surface. Mark the surface, and then drill the holes. (Drill Size: 3/16-inch / 4.8-mm) for the plastic-ribbed anchors.
- 2. Use a rubber mallet to hammer the plastic-ribbed anchors into the prepared holes.
- 3. Line up the backplate's Elongated Hole to the plasticribbed anchors.
- 4. Install the mounting screws through the backplate and plastic-ribbed anchors.
- 5. Connect the wires to the terminals on the WiFi Alert Button. See the **J1 Power Connection** diagram on this Quick Reference Placemat.
- 6. Put the WiFi Alert Button and the backplate together by installing the flat head machine screw on the bottom.

Mounting Options—Optional Plastic Low Voltage Bracket (Not Included)

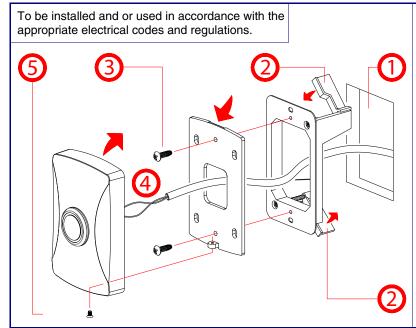

The hole pattern of the WiFi Alert Button's back plate can be mounted on a standard gang box or low voltage mount (pictured to the left).

- 1. Make a hole cutout for the Low Voltage Bracket*.
- 2. Fold down the flagnuts, and then insert the Low Voltage Bracket into the hole cutout.
- 3. Install the mounting screws* through the backplate and the Low Voltage Bracket.
- 4. Connect the wires to the terminals on the InformaCast Enabled WiFi Alert Button. See the J1 Power Connection diagram on this Quick Reference
- 5. Put the InformaCast Enabled WiFi Alert Button and the backplate together by Installing the flat head machine screw on the bottom.

*The Low Voltage Bracket and mounting screws are not provided.

Contacting CyberData

Corporate Headquarters

CyberData Corporation 3 Justin Court

Monterey, CA 93940, USA

Phone: 831-373-2601 Fax: 831-373-4193 https://www.cyberdata.net/ Sales: 831-373-2601 ext. 334 Support: 831-373-2601 ext. 333

Support Website: https://support.cyberdata.net/

RMA Department Contact and Status: https://support.cyberdata.net/


Warranty Information: https://support.cyberdata.net/



CyberData Installation Quick Reference WiFi Alert Button 011527



Typical Installation

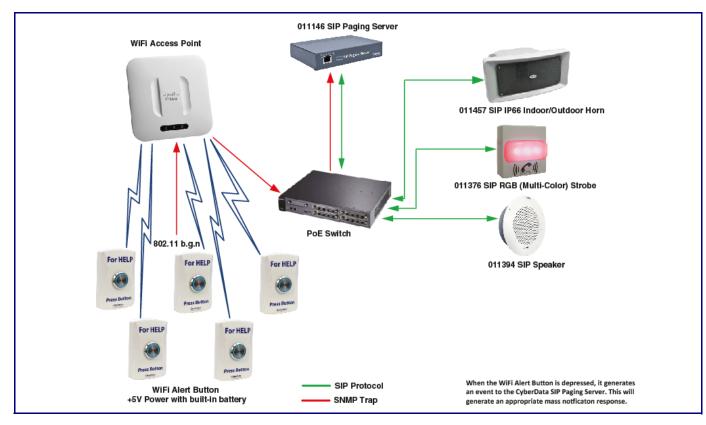



Getting Started

- Download the WiFi Alert Button Operations Guide PDF file from the Downloads tab at:
- https://www.cyberdata.net/products/011527/
- Create a plan for the locations of your WiFi buttons.
- . WARNING: To prevent injury, this apparatus must be securely attached to the wall in accordance with the installation instructions.
- WARNING: The device enclosure is not rated for any AC voltages!


Parts

Quick Reference

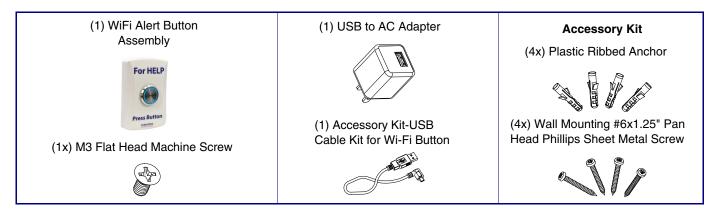


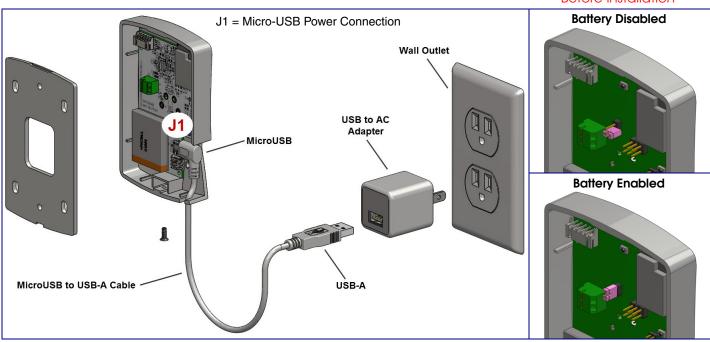

Optional Auxiliary Power Supply (Part #011542 (Sold Separately))

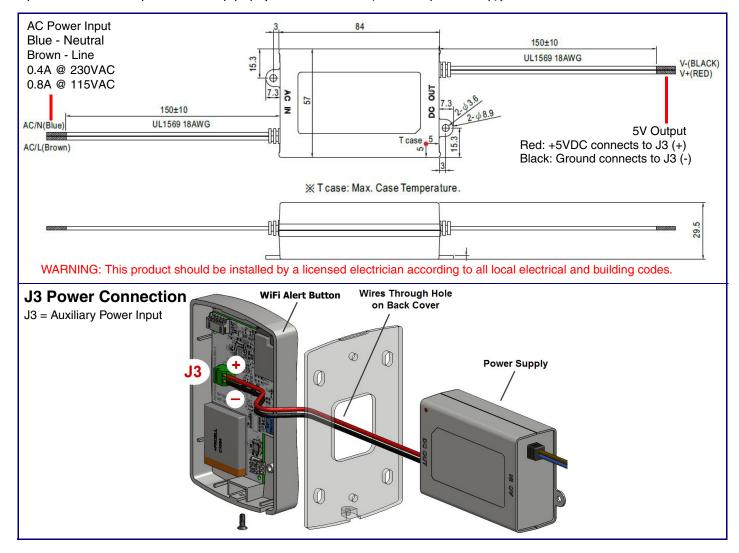

Reset Test Function Management (RTFM) Button

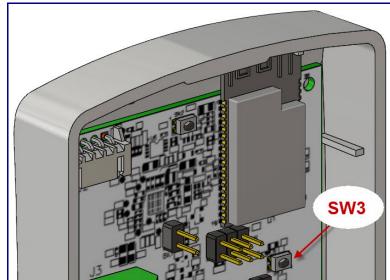

When the device is operational and linked to a network, you can use the Reset Test Function Management (RTFM) button (SW3 [see picture]) to restore the device to the factory default settings.

To restore the device to factory default settings:

• Press and hold the RTFM button for three seconds.

Dimensions and Mounting Template

Quick Reference

