

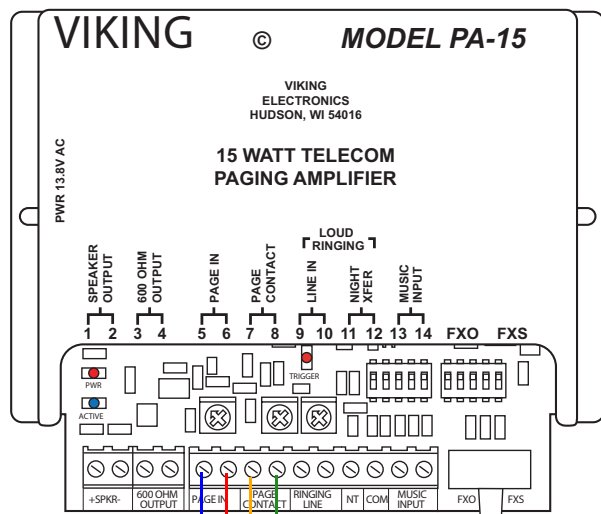


### Viking PA-15 Amplifier

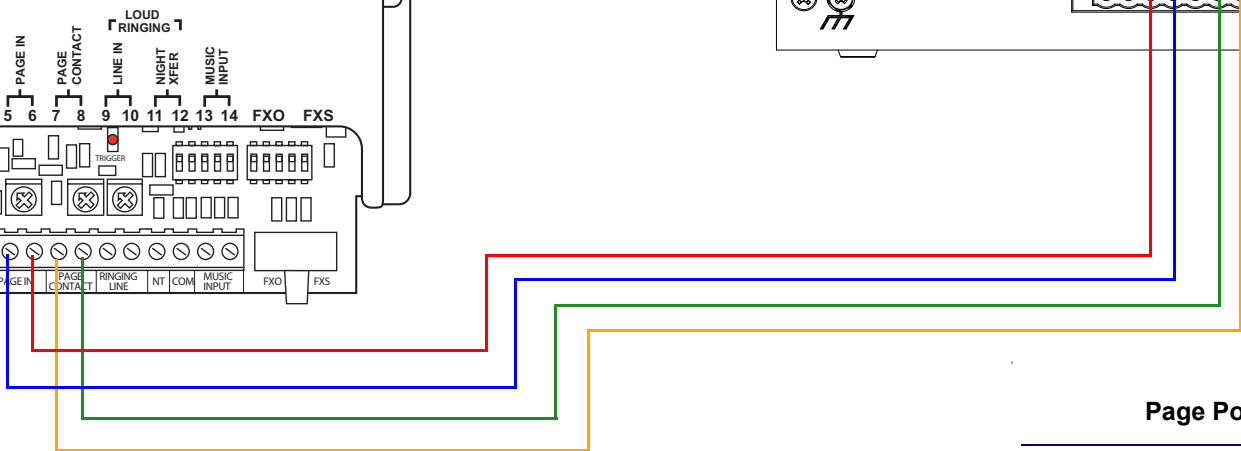

### SIP Paging Adapter Connections

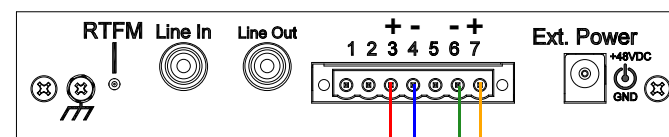

### Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output <sup>a</sup>
4	Negative 600-Ohm Audio Output <sup>a</sup>
5	Audio Ground Reference.
6	Relay Contact - Common <sup>b</sup>
7	Relay Contact - Normally Open <sup>b</sup>

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

### Notes

If you are using the contact closure instead of the Viking VOX sensing, then the **Enable Relay during call** setting must be checked on the CyberData **Device Configuration** web page.

2-conductor, shielded speaker wire is recommended.