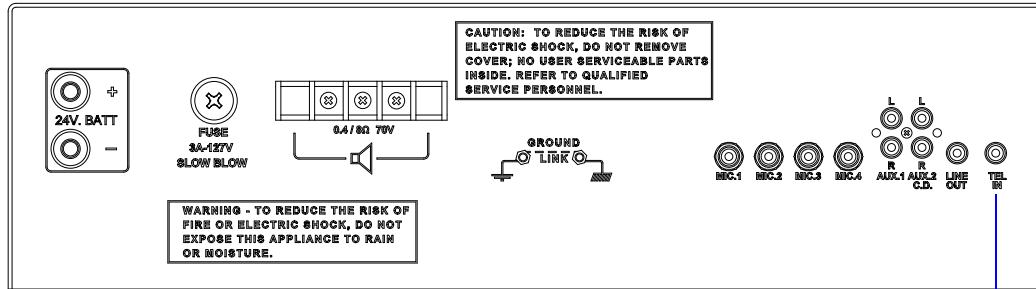**CyberData**
The IP Endpoint Company

Asaji 1094

V3 Paging Server Connections

Line In   Line Out   Page Port Output   Power

48VDC

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER; NO USER SERVICEABLE PARTS INSIDE. REFER TO QUALIFIED SERVICE PERSONNEL.

24V. BATT   FUSE 3A-127V SLOW BLOW   0.4 / 8Ω 70V   GROUND LINK

L L R R MIC.1 MIC.2 MIC.3 MIC.4 AUX.1 AUX.2 C.D. LINE OUT TEL IN

WARNING - TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

RTFM   Line In   Line Out   Interface   Ext. Power

1 2 3 4 5 6 7

+48VDC GND

Ground