


### Valcom V-2001A Amplifier

Power down amplifier and  
turn OFF battery feed

### SIP Paging Adapter

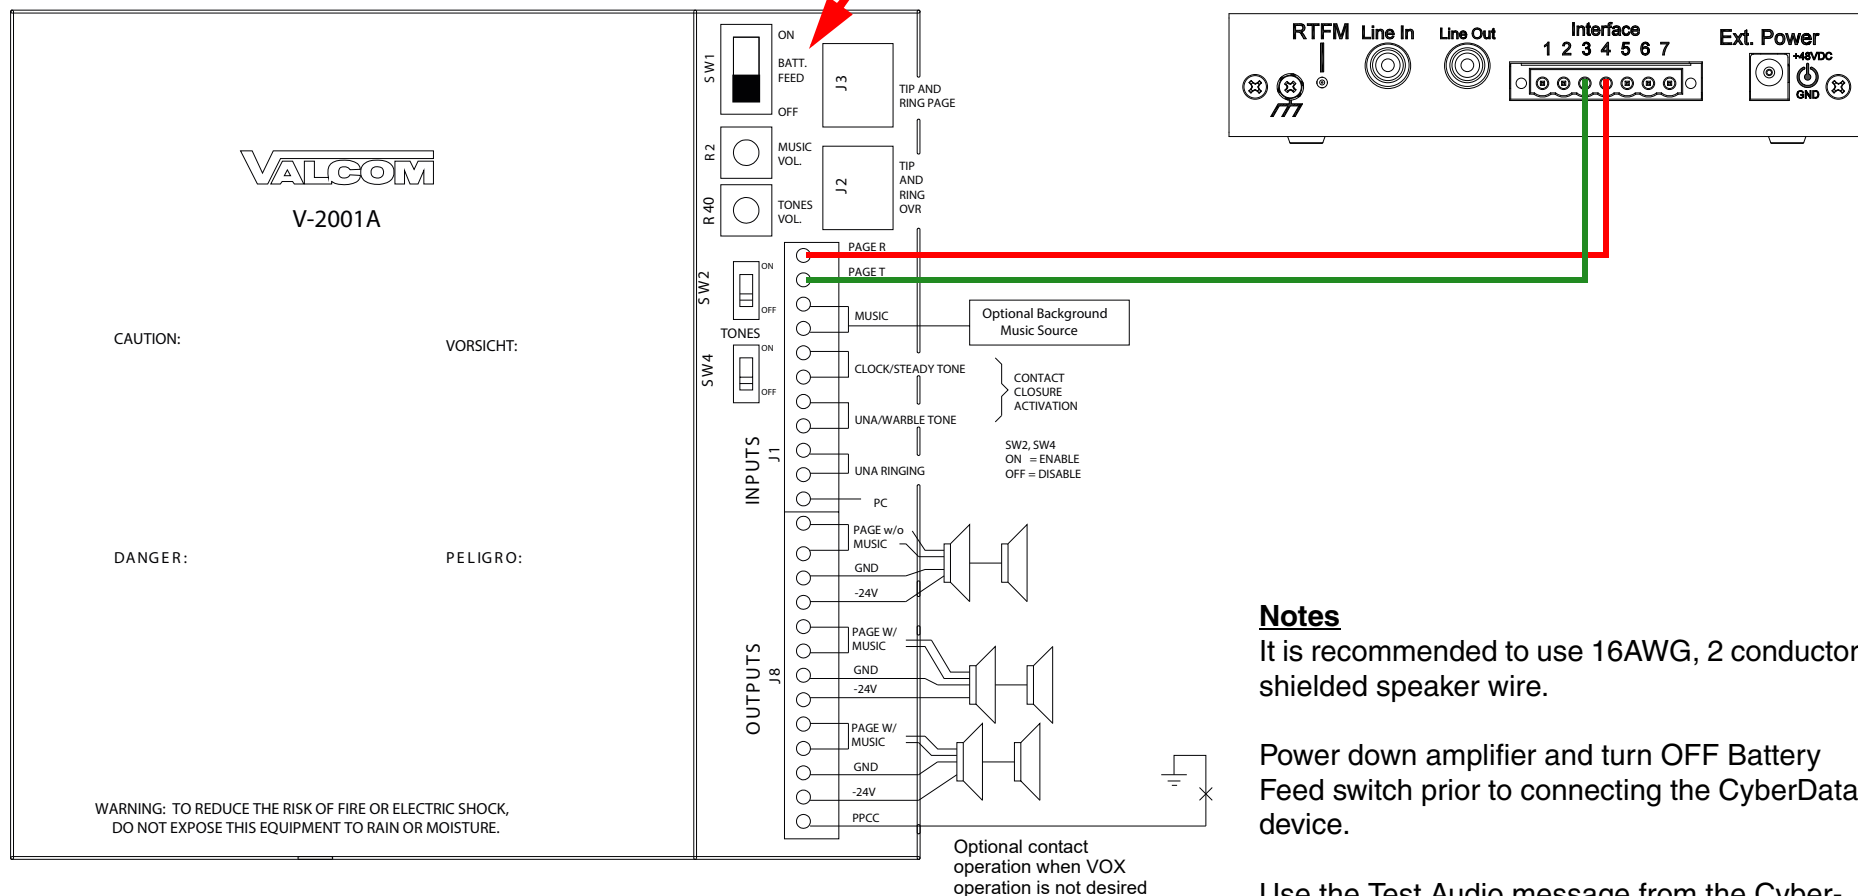

### Notes

It is recommended to use 16AWG, 2 conductor shielded speaker wire.

Power down amplifier and turn OFF Battery Feed switch prior to connecting the CyberData device.

Use the Test Audio message from the CyberData web interface to ensure audibility through the speaker system.

The CyberData device only provides the audio signal. The amplifier or the analog speakers will dictate the volume level.