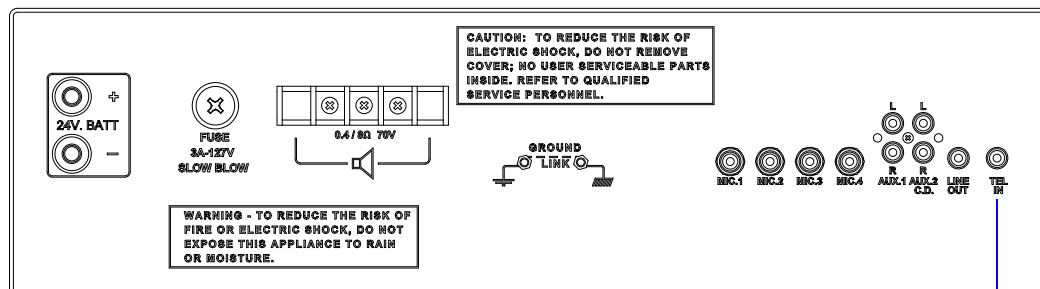# Asaji 1094 to Singlewire Paging Adapter Connections

Asaji 1094

Singlewire Paging Adapter Connections

Line In   Line Out   Page Port Output   Power

48VDC

CAUTION: TO REDUCE THE RISK OF ELECTRIC SHOCK, DO NOT REMOVE COVER; NO USER SERVICEABLE PARTS INSIDE. REFER TO QUALIFIED SERVICE PERSONNEL.

24V. BATT

FUSE 3A-127V SLOW BLOW

0.4 / 8Ω 70V

GROUND LINK

MIC.1 MIC.2 MIC.3 MIC.4 AUX.1 AUX.2 C.D. LINE OUT TEL. IN

WARNING - TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE THIS APPLIANCE TO RAIN OR MOISTURE.

RTFM   Line In   Line Out   Interface   Ext. Power

1 2 3 4 5 6 7

+48VDC

GND

Ground