



Caution
Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

MEM Audio MD35M Amplifier

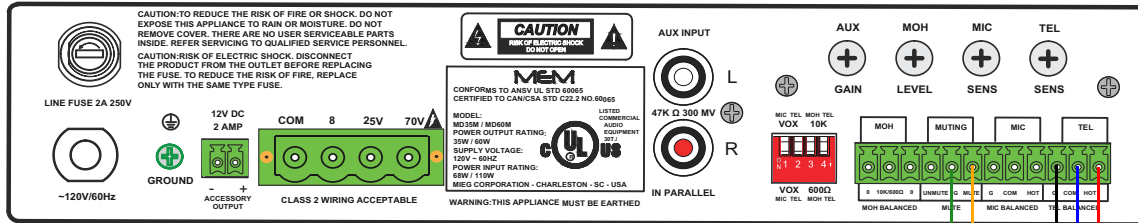

InformaCast Enabled Paging Adapter Connections

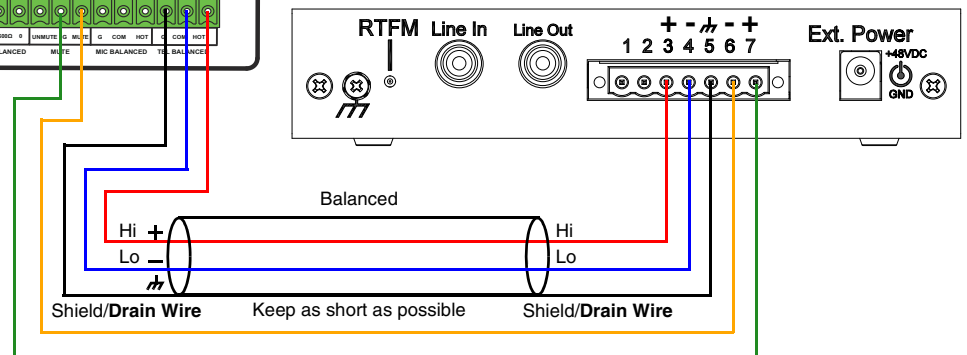

Page Port Connections

| Pin | Description |
|-----|--|
| 1 | Fault Sense Input (Common). |
| 2 | Fault Sense Input (Sense). |
| 3 | Positive 600-Ohm Audio Output ^a |
| 4 | Negative 600-Ohm Audio Output ^a |
| 5 | Audio Ground Reference. |
| 6 | Relay Contact - Common ^b |
| 7 | Relay Contact - Normally Open ^b |

Notes

Please enable the setting **Enable Relay on Local Audio** which is located on the **Device** tab of the unit's web interface.

2-conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.