

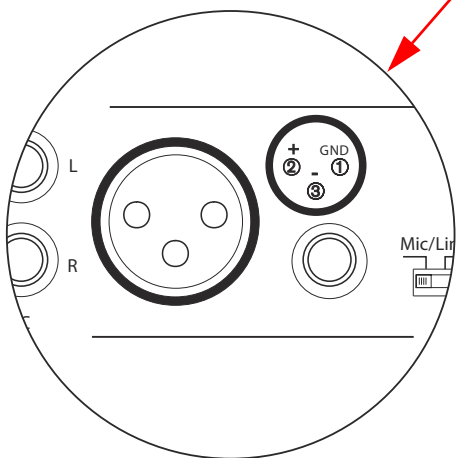


Bosch LBB 1990/00 Plena Voice Alarm Controller

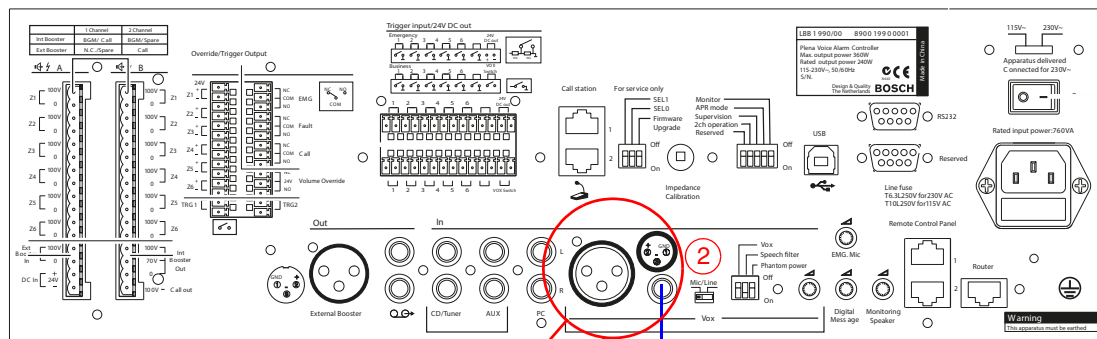

V3 Paging Server Connections

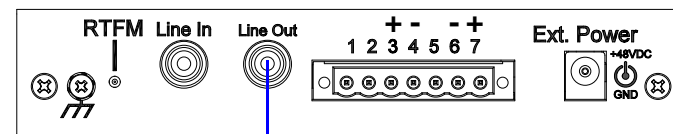

Notes

1. The CyberData V3 Paging Server's RCA line level output connects to the Bosch LBB 1990/00 Plena Voice Alarm Controller using the **Mic/Line RCA** input. This corresponds to item #38 "Mic/Line input with VOX functionality" in Section 2.3.6 "Overview" on pages 12 - 15 of the Bosch LBB1990/00 Operation Guide. A 2-conductor, shielded cable terminated with RCA connectors is recommended.
2. Move the **Mic/Line** switch into the **Line** position per Section 4.6 "VOX Configuration" on pages 30 - 31. Please contact Bosch Technical Support for further assistance with LBB 1990/00 configurations.