


CyberData Paso DMS Series Amplifier to V3 Paging Server Connections

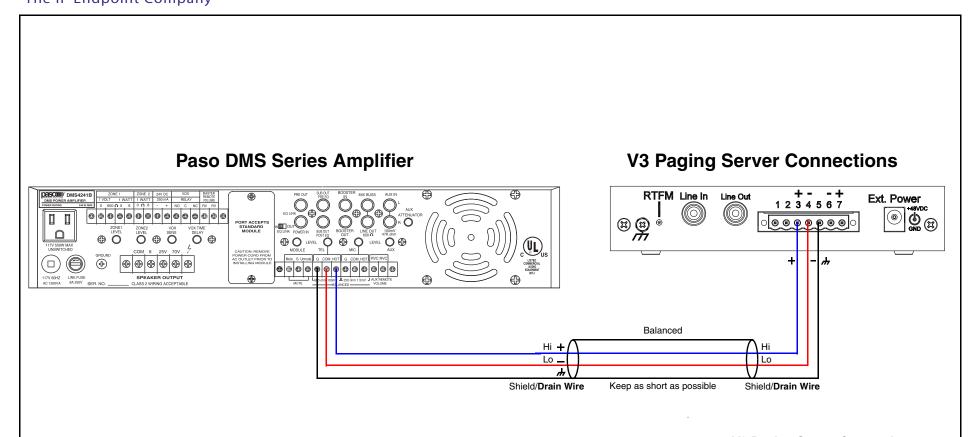

V3 Paging Server Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b
a.The	e 600-Ohm audio output of the page port is

Notes

CyberData V3 Paging Server's Page Port output connects to the TEL input on the Paso DMS Series Amplifier. Connect the Drain Wire to ground if necessary.

2-conductor, shielded speaker wire is recommended.

also suited for interfaces with lower input impedances. b.1 Amp at 30 VDC for continuous loads.