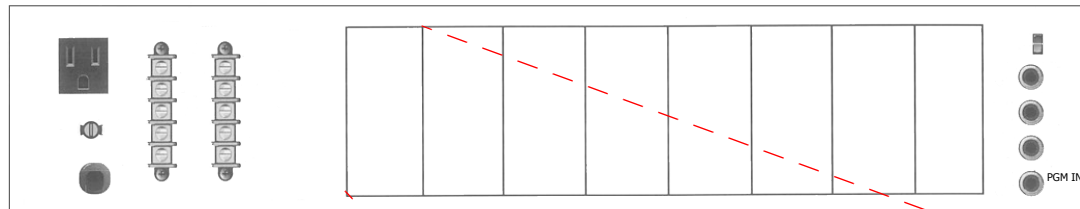
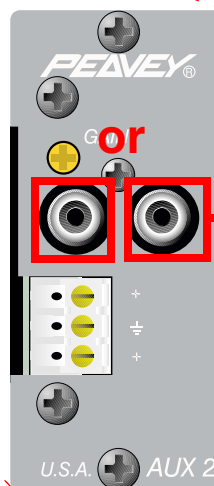
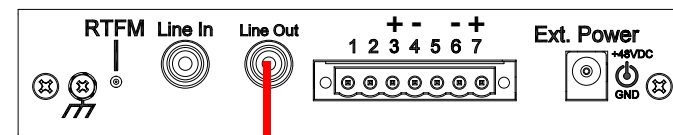




Peavey MMA 8150T Amplifier**Singlewire Paging Adapter Connections****Notes**

CyberData SIP Paging Adapter's RCA line level output can connect to either an AUX 2 module or a TPM-S2 Module.



This page shows the possible connections to an AUX 2 module.

Connect the SIP Paging Adapter's Line Out to one of the RCA phono input jacks.

Peavey MMA 8150T Amplifier

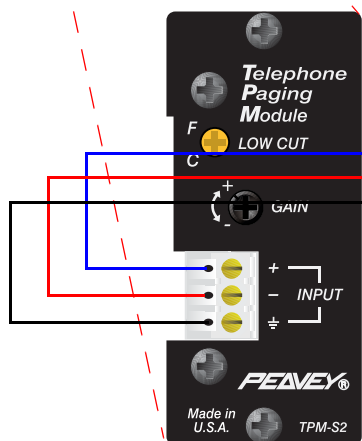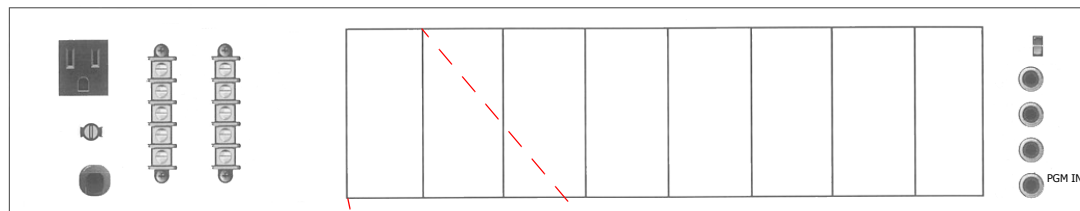

Singlewire Paging Adapter Connections

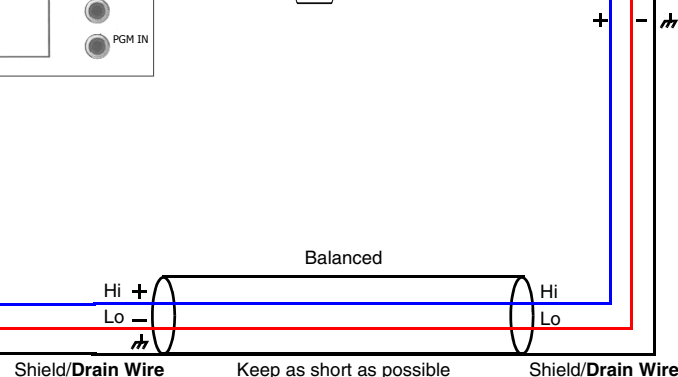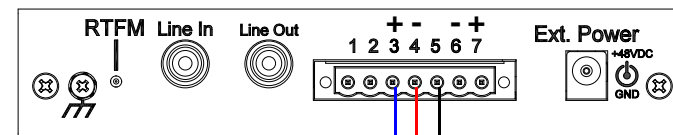

Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

Notes

This page shows possible connections to a TPM-S2 module

Connect the SIP Paging Adapter's Page Port output terminal pins to the INPUT on the TPM-S2 module.

2 conductor, shielded speaker wire is recommended.