


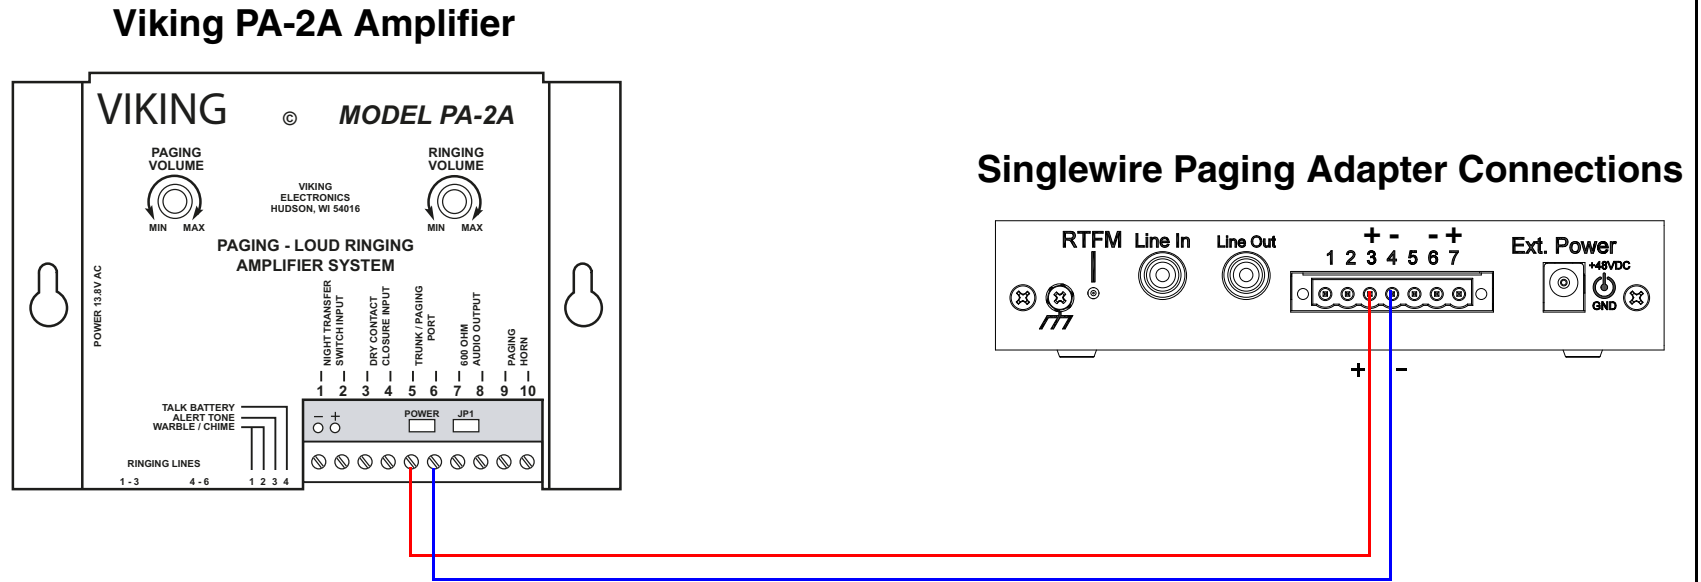

Notes

The CyberData SIP Paging Adapter's 600 Ohm Page Port output connects to the Trunk/Paging Port input on the Viking PA-2A Amplifier.

Set DIP switch #4 for TALK BATTERY to the OFF position on the PA-2A to prevent damaging the SIP Paging Adapter.

2-conductor, shielded speaker wire is recommended.

Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.