





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

Atlas Sound ASP MG24

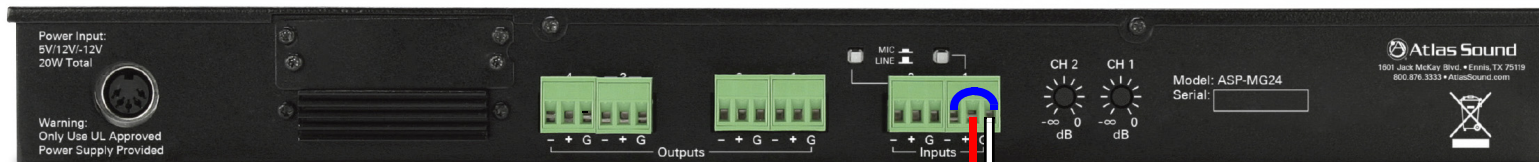

SIP Paging Adapter Connections

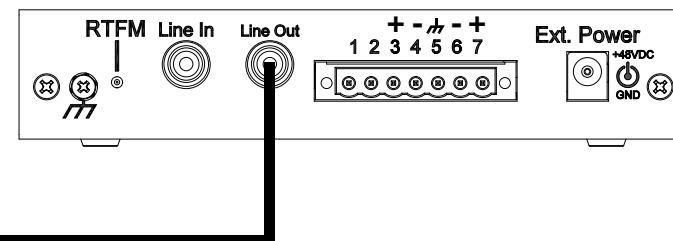

Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

This connection will use an RCA cable that has been cut on one end. The core goes to the positive terminal, shield goes to ground, and ground is bridged to negative.

2-conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.