


Episode ECA-70MIXAMP-1-120 Amplifier





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

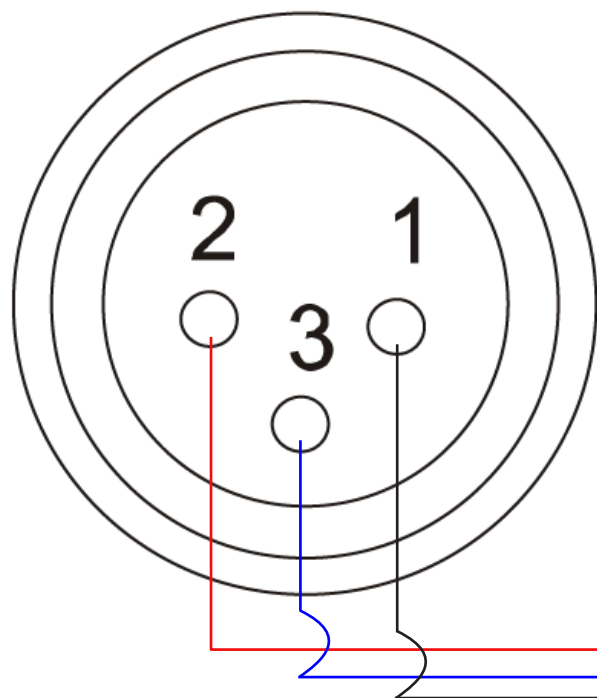

InformaCast Enabled Paging Adapter Connections

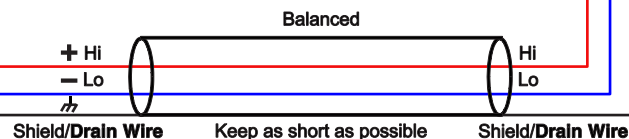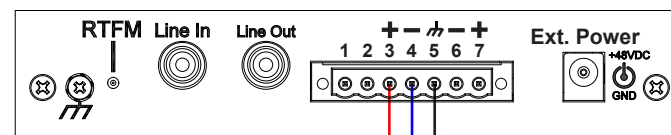

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

Please ensure the Phantom Power Switch for the connected XLR input is set to **Off**.
To set the priority for the paging device, set the MIC Priority for the XLR input to the **On** (Up) position.

2 conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.