


CyberData TOA BG-2240D Amplifier to SIP Paging Adapter Connections

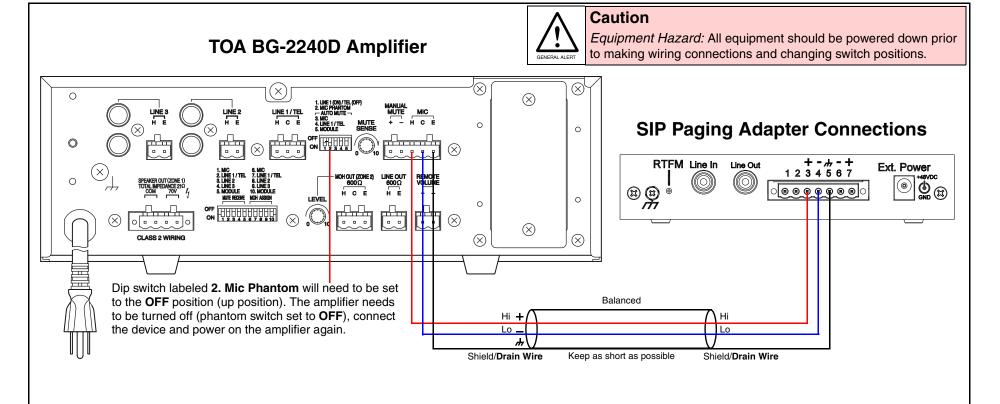

Notes

Dip switch labeled **2. Mic Phantom** will need to be set to the **OFF** position (up position). The amplifier needs to be turned off (phantom switch set to OFF), connect the device and power on the amplifier again.

2-conductor, shielded speaker wire is recommended.

Page Port Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b
a.The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.	

b.1 Amp at 30 VDC for continuous loads.