


## CyberData Penton AMP60/AMP120 Amplifier to Singlewire Paging Adapter Connections



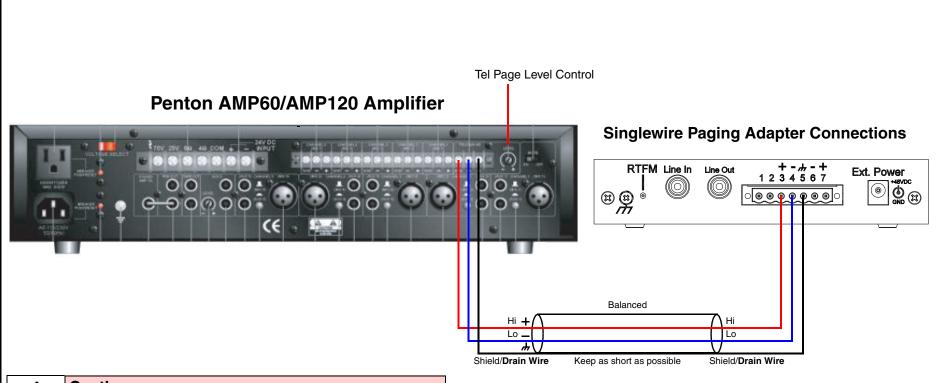

## Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

## **Notes**

- 1. Power off the amplifier and reduce the volume by turning the Tel Page Level Control counter-clockwise before connecting the CyberData device and powering the amp back on.
- 2. Power off the amplifier prior to connecting the CyberData device and turn the Tel Page Level Control fully counter-clockwise.
- 3. Connect the CyberData device, and then power the amplifier back on.
- 4. Slowly raise the Tel Page Level Control (clockwise) to adjust the volume.

2-conductor, shielded speaker wire is recommended.

## Page Port Connections

rage rort connections	
Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output <sup>a</sup>
4	Negative 600-Ohm Audio Output <sup>a</sup>
5	Audio Ground Reference.
6	Relay Contact - Common <sup>b</sup>
7	Relay Contact - Normally Open <sup>b</sup>
a.The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances. b.1 Amp at 30 VDC for continuous loads.	