
# CyberData TOA BG-2035/2060/2120 Amplifier to SIP Paging Adapter Connections



#### Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

## TOA BG-2035/2060/2120 Amplifier

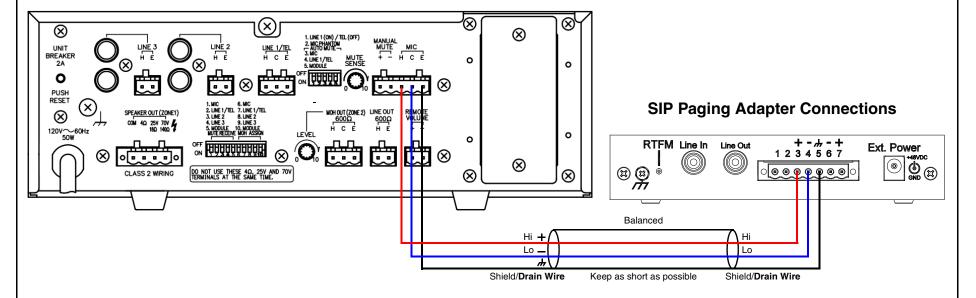

## **Notes**

Please set the following DIP switches:

**Function Switches A** 

DIP Switch 2 -- Off

DIP Switch 3 -- On

Function Switches B

DIP Switch 1 -- Off

2-conductor, shielded speaker wire is recommended.

### **Page Port Connections**

| Pin          | Description  |
|--------------|--|
| 1            | Fault Sense Input (Common).  |
| 2            | Fault Sense Input (Sense).   |
| 3            | Positive 600-Ohm Audio Output <sup>a</sup>   |
| 4            | Negative 600-Ohm Audio Output <sup>a</sup>   |
| 5            | Audio Ground Reference.  |
| 6            | Relay Contact - Common <sup>b</sup>  |
| 7            | Relay Contact - Normally Open <sup>b</sup>   |
| also<br>impe | e 600-Ohm audio output of the page port is suited for interfaces with lower input dances.  Imp at 30 VDC for continuous loads. |