
Maximum Recommended Wall Cutout Dimensions

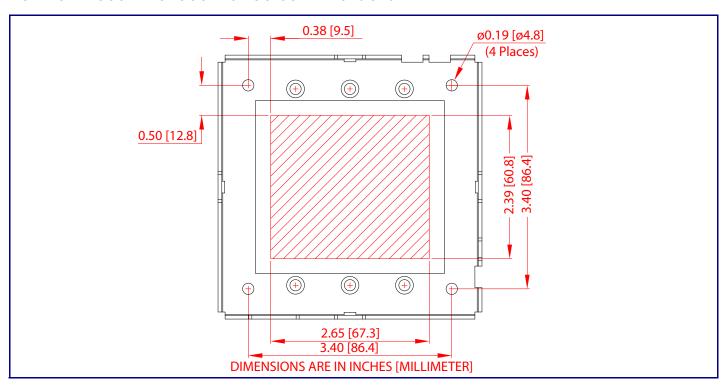

Contacting CyberData


Corporate Headquarters

Sales: (831) 373-2601 ext. 334 CyberData Corporation Support: 831-373-2601 ext. 333 3 Justin Court

Support Website: http://support.cyberdata.net/ Monterey, CA 93940, USA RMA Department: (831) 373-2601 ext. 136

Phone: 831-373-2601 RMA Email: RMA@CyberData.net Fax: 831-373-4193 RMA Status: http://support.cyberdata.net/ http://www.cyberdata.net/ Warranty Information: http://support.cyberdata.net/


CyberData Installation Quick Reference SIP Strobe 011087



Parameter	Factory Default Setting
IP Addressing	DHCP
IP Address ^a	10.10.10.10
Web Access Username	admin
Web Access Password	admin
Subnet Mask ^a	255.0.0.0
Default Gateway ^a	10.0.0.1

a. Default if there is not a DHCP server present.

Typical System Installation

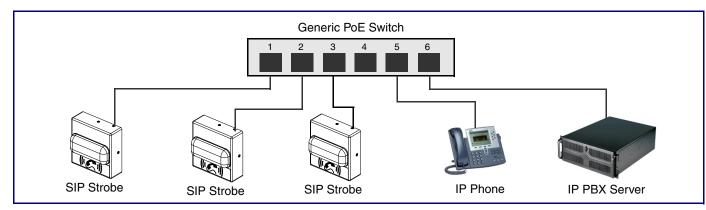


Getting Started


- Download the SIP Strobe Operations Guide PDF file, from the SIP Strobe product page at: http://www.cyberdata.net/products/voip/digitalanalog/strobe/docs.html
- Create a plan for the locations of your SIP Strobes.
- WARNING: This product should be installed by a licensed electrician according to all local electrical and building codes.
- WARNING: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation instructions.
- WARNING: The PoE connector is intended for intra-building connections only and does not route to the outside plant.
- WARNING: This enclosure is not rated for any AC voltages!

SIP Strobe Parts


Quick Reference

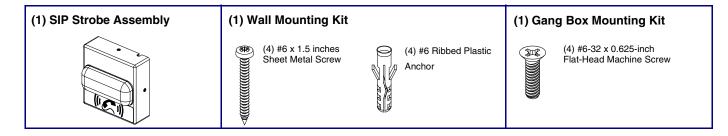


Dimensions

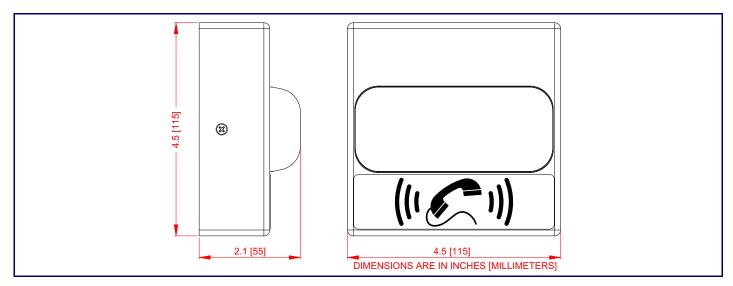

Connections

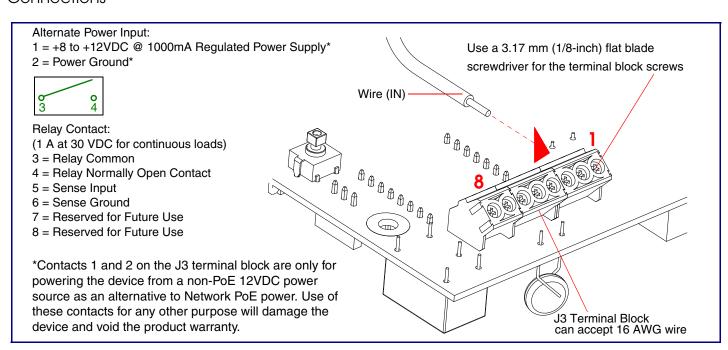

RTFM Button

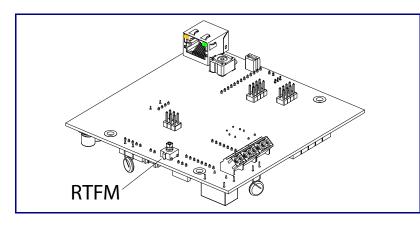


When the device is operational and linked to a network, you can use the Reset Test Function Management (RTFM) button (SW1) to restore the device to the factory default settings.

To restore the device to factory default settings:

 Press and hold the RTFM button for seven seconds, and then release the RTFM button.

Wall Mounting Options

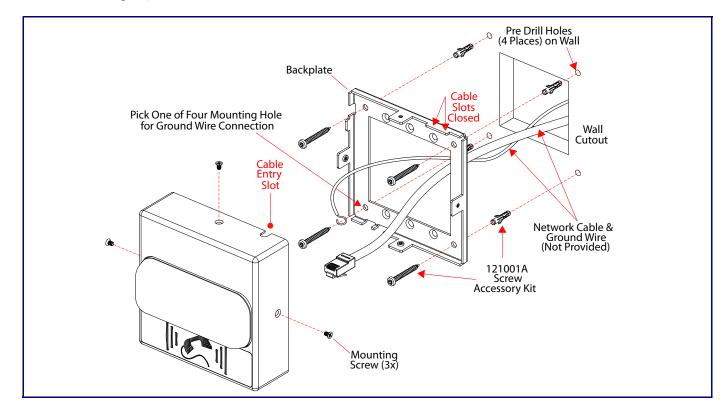

Maximum Recommended Wall Cutout Dimensions

