

# Singlewire Informacast/Berbee-enabled VoIP V2 Loudspeaker Amplifier

Now with up to 25 watts output (802.3at)

The new CyberData V2 SIP-enabled VoIP Loudspeaker Amplifier is for use with Singlewire's paging and emergency notification software InformaCast® or InformaCast CK. It provides an easy method for implementing an IP-based overhead paging system for both new and legacy installations.

The Amplifier is designed for noisy environments such as warehouses and shop floors. It comes with a weather-resistant NEMA enclosure. With up to 25 watts of driving power (802.3at), the Amplifier provides direct drive of a standard Horn speaker and supports a line-out connector for connection to an external amplifier.

## Features

- InformaCast®
- Dual-speed ethernet 10/100 Mbps
- Weather-resistant NEMA enclosure
- Web-based configuration
- PoE 802.3at and 802.3af-enabled
- Line-out connector
- Direct 8 Ohm speaker drive
- User-uploadable tones and messages
- Digital and manual volume control



011116



011114



Loudspeaker (part #011068) must be purchased separately.

## Specifications

Ethernet I/F	10/100 Mbps
Power Input	PoE 802.3at or 802.3af
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Protocol	InformaCast v4.0 and later
Payload Types	G711

Warranty	2 Years Limited
----------	-----------------

Dimensions	14" x 10" x 4"
------------	----------------

Output	<ul style="list-style-type: none"> <li>● 802.3af - up to 8 watts</li> <li>● 802.3at - up to 25 watts</li> </ul>
--------	---

## Lineout:

Output Signal Amplitudes	2.0 VPP maximum
Output Level	+2dBm nominal
Total Harmonic Distortion	0.5% maximum


Boxed Weight	6.5 lbs.
--------------	----------

Part Number:	
Loudspeaker Amplifier, AC	011114
Loudspeaker Amplifier, PoE	011116
Loudspeaker Part Number	011068


# Singlewire Informacast/Berbee-enabled VoIP V2 Loudspeaker Amplifier



011116

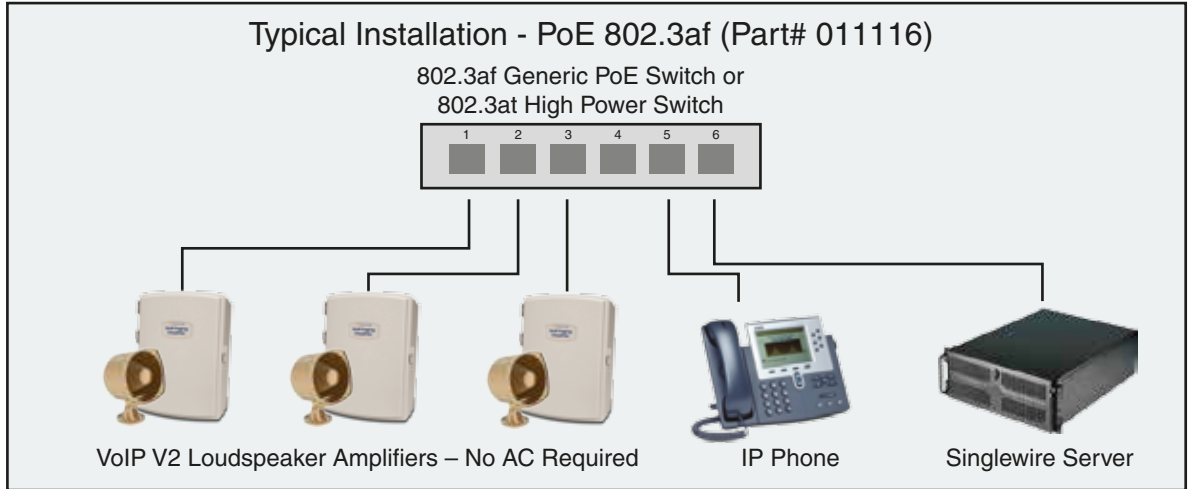

011114

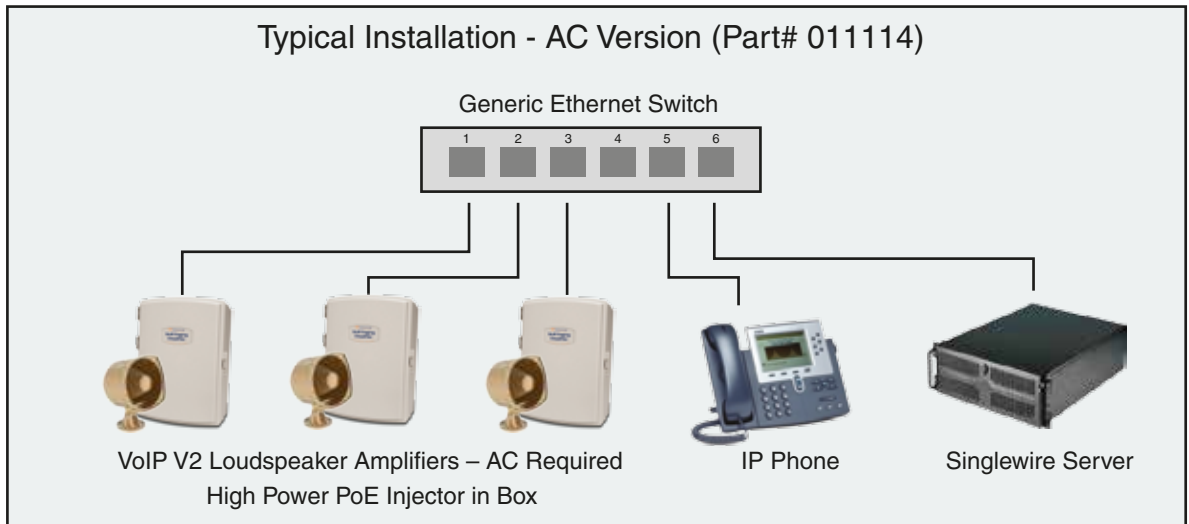

\*For AC wiring, use a qualified electrician.

