





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

Grommes-Precision GT 60C/125C Amplifier



InformaCast Enabled Paging Adapter

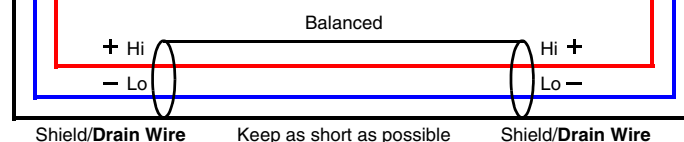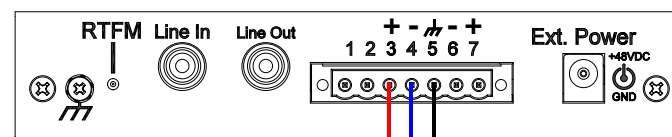

Page Port Connections

Pin	Description
1	Fault Sense Input (Common)
2	Fault Sense Input (Sense)
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.

Notes:

Adjust the Level potentiometer on the amplifier to allow the VOX circuit to detect audio from the CyberData device. This will allow the amplifier to mute all other audio sources and play the audio from the CyberData device.

2-conductor, shielded speaker wire is recommended.