


Bogen CC4041 Amplifier





Caution

Equipment Hazard: All equipment should be powered down prior to making wiring connections and changing switch positions.

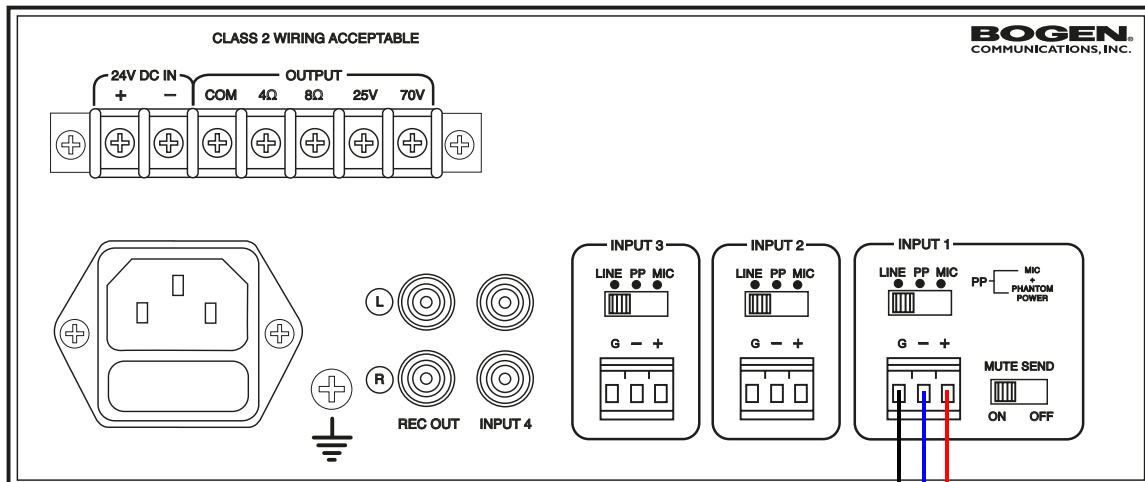

SIP Paging Adapter

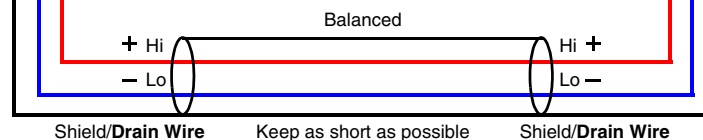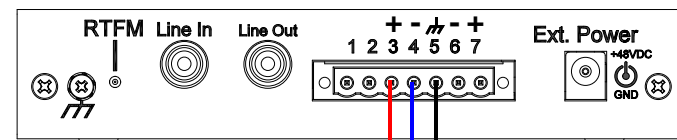

Page Port Connections

| Pin | Description |
|-----|--|
| 1 | Fault Sense Input (Common) |
| 2 | Fault Sense Input (Sense) |
| 3 | Positive 600-Ohm Audio Output ^a |
| 4 | Negative 600-Ohm Audio Output ^a |
| 5 | Audio Ground Reference |
| 6 | Relay Contact - Common ^b |
| 7 | Relay Contact - Normally Open ^b |

Notes:

The **INPUT 1** dip switch must be set to **LINE**.
 The **MUTE SEND** dip switch must be set to **ON**.
 2-conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.