


### Bogen CC4041 Amplifier





#### Caution

*Equipment Hazard:* All equipment should be powered down prior to making wiring connections and changing switch positions.

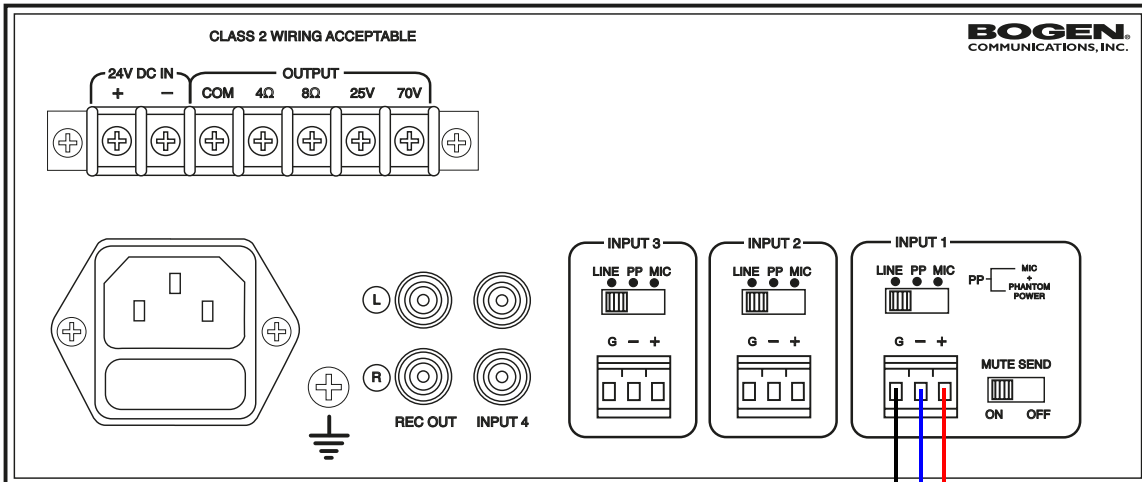

### SIP Paging Server

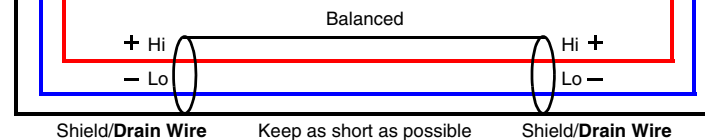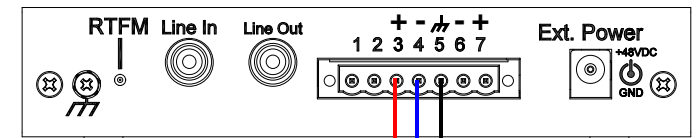

#### Page Port Connections

Pin	Description
1	Fault Sense Input (Common)
2	Fault Sense Input (Sense)
3	Positive 600-Ohm Audio Output <sup>a</sup>
4	Negative 600-Ohm Audio Output <sup>a</sup>
5	Audio Ground Reference
6	Relay Contact - Common <sup>b</sup>
7	Relay Contact - Normally Open <sup>b</sup>

#### Notes:

The **INPUT 1** dip switch must be set to **LINE**.  
 The **MUTE SEND** dip switch must be set to **ON**.  
 2-conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.