



### Bogen C10, C35, C60, C100 Amplifier



#### Models C35/60



#### Model C100

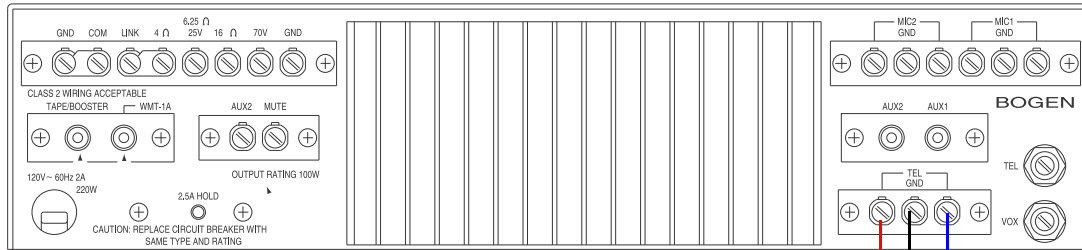

### V3 Paging Server Connections

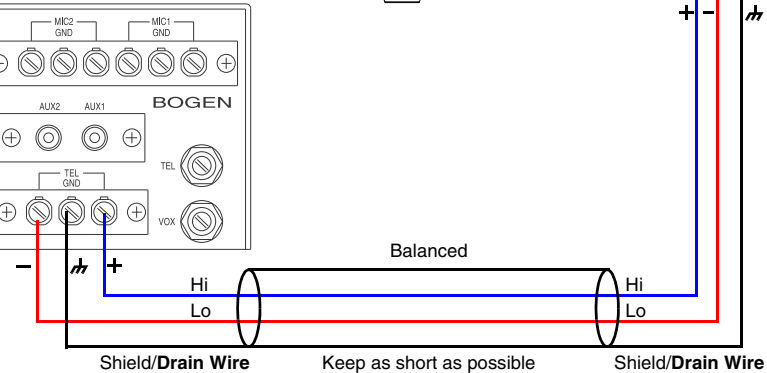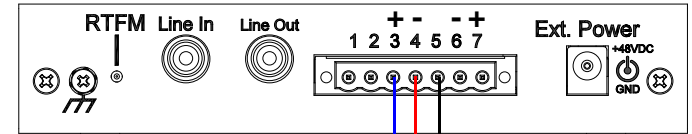

#### Page Port Output Connections

| Pin | Description                                |
|-----|--|
| 1   | Fault Sense Input (Common).                |
| 2   | Fault Sense Input (Sense).                 |
| 3   | Positive 600-Ohm Audio Output <sup>a</sup> |
| 4   | Negative 600-Ohm Audio Output <sup>a</sup> |
| 5   | Audio Ground Reference.                    |
| 6   | Relay Contact - Common <sup>b</sup>        |
| 7   | Relay Contact - Normally Open <sup>b</sup> |

#### Notes

CyberData V3 Paging Server's 600 Ohm Page Port terminal strip connects to the TEL input terminal strip on the Bogen C-series amplifier. Background music will be automatically muted upon the incoming signal from the V3 Paging Server.

2 conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.