



Bogen C10, C35, C60, C100 Amplifier



Models C35/60



Model C100

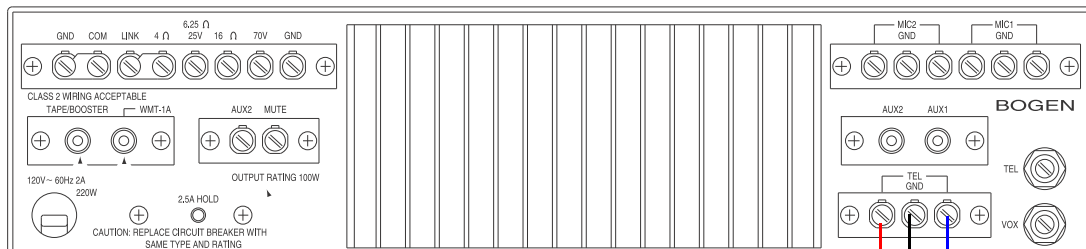

SIP Paging Adapter Connections

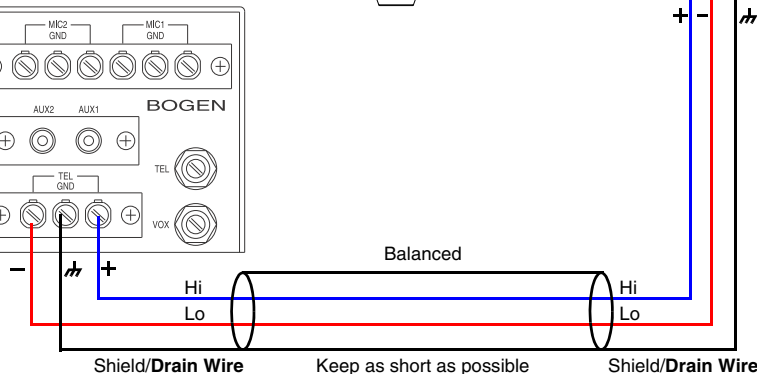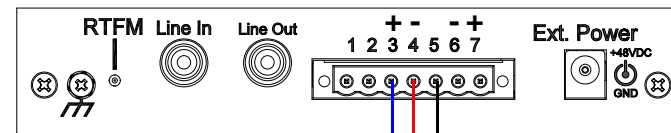

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

CyberData SIP Paging Adapter's 600 Ohm Page Port terminal strip connects to the TEL input terminal strip on the Bogen C-series amplifier. Background music will be automatically muted upon the incoming signal from the SIP Paging Adapter.

2 conductor, shielded speaker wire is recommended.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.

b. 1 Amp at 30 VDC for continuous loads.