

SIP Emergency Intercom

The SIP Emergency Intercom delivers two-way communication and secure access control for your VoIP phone system. This device is perfect for settings such as commercial/residential facilities, schools and universities, retail establishments, warehouse and manufacturing plants.

CyberData has maintained one of the most comprehensive list of IP PBX servers certified to work with CyberData VoIP Products.

Features

- TLS 1.2, Enhanced security for IP Endpoints in a local or cloud based environment
- Enhanced acoustic echo canceler
- Full-duplex voice operation
- Supports SRST (Survivable Remote Site Telephony) in a Cisco environment
- Streamlined case design
- Network web management and firmware download
- Network adjustable speaker volume
- Concurrent SIP and multicast paging
- Dry relay contact for auxiliary control
- Door closure and tamper alert signal
- Downloadable alert, ringtones and callout messages



Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Speaker Output	2 Watts Peak Power
On-Board Relay	1A @ 30 VDC
Payload Types	G.711 a-law, G.711μ-law, G.722, and G.729
Network Security	TLS/SSL 1.2
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature Storage Altitude	Temperature: -40° C to 70° C (-40° F to 158° F) Up to 15,000 ft. (4573 m)
Dimensions*	4.53 inches [115 mm] Length 2.22 inches [56.3 mm] Width 4.53 inches [115 mm] Height
Weight Boxed Weight	1.0 lbs. [0.45 kg] 2.0 lbs. [0.90 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 Years Limited
Part Number	011209

Related Products:



011375 Network Dual Door Strike Relay



011269 Door Strike Intermediate Relay Module




011288 Auxiliary RGB (Multi-Color) Strobe Kit

*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

SIP Emergency Intercom

Typical Installation

Trigger electric door strike with a predetermined key code from the IP phone

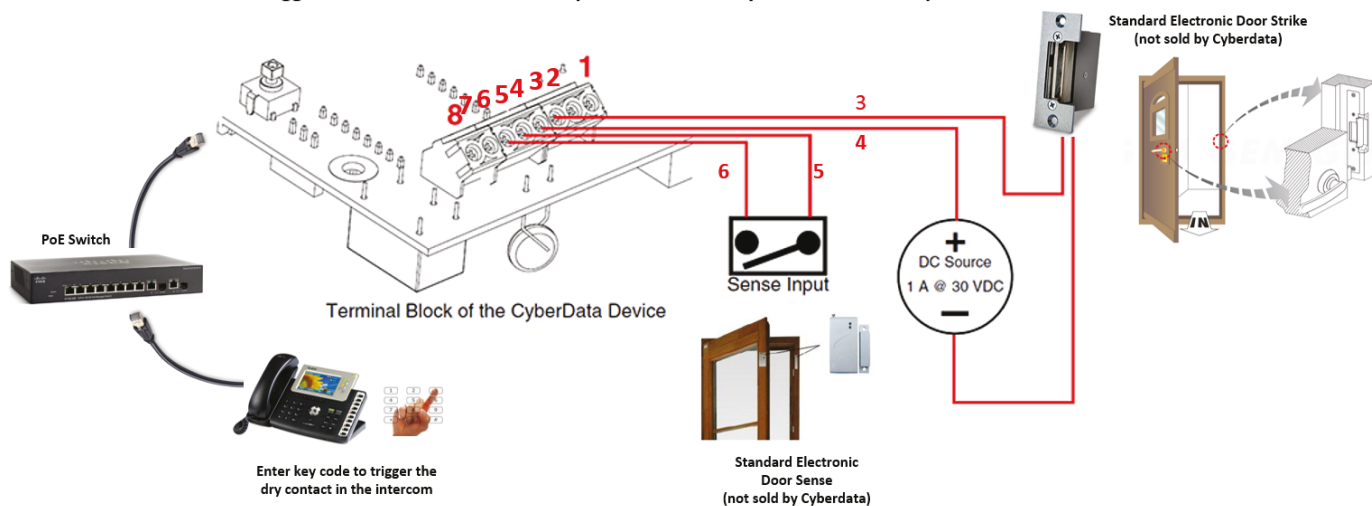

Typical Installation - Auxiliary RGB Strobe Kit

Generic PoE Switch

