


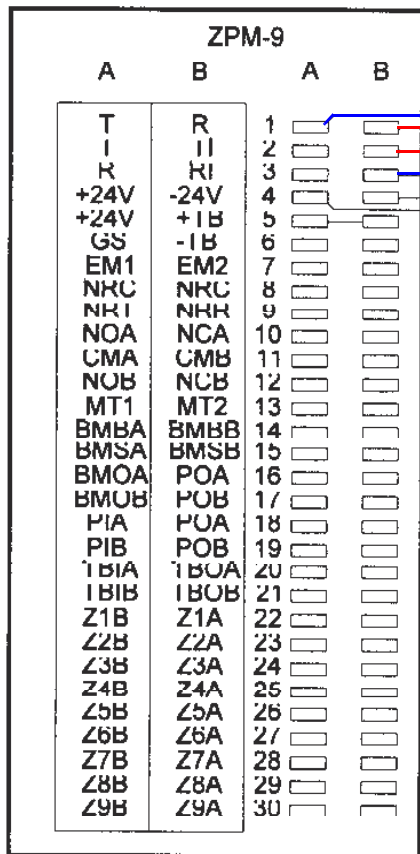


Bogen ZPM3-9 Amplifier

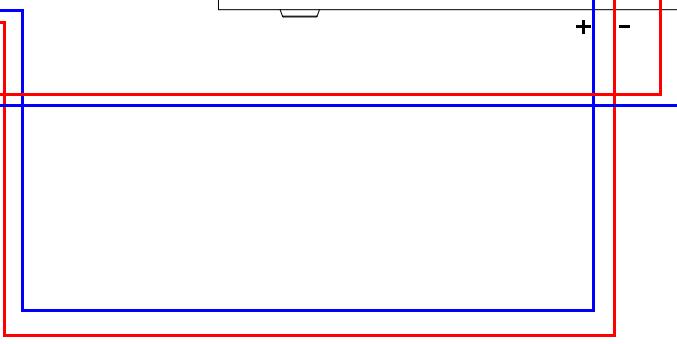

Singlewire Paging Adapter Connections

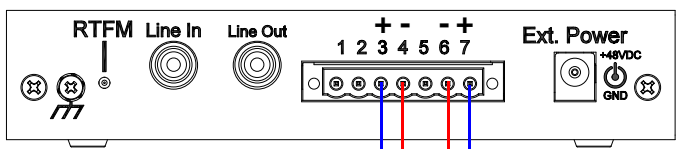

Page Port Output Connections

Pin	Description
1	Fault Sense Input (Common).
2	Fault Sense Input (Sense).
3	Positive 600-Ohm Audio Output ^a
4	Negative 600-Ohm Audio Output ^a
5	Audio Ground Reference.
6	Relay Contact - Common ^b
7	Relay Contact - Normally Open ^b

Notes

The CyberData Singlewire Paging Adapter connects to the Bogen ZPM-9 as a "Paging Port" per Figure 4 on page 3 of the ZPM-9 operation guide.

It will be necessary to use the Singlewire Paging Adapter's normally open relay contacts in addition to the 600 Ohm audio output.

DTMF pass-thru is supported.

2 conductor, shielded speaker wire is recommended.

Passing DTMF tones through the Page Port and RCA Line Level outputs is not supported when Buffer SIP Calls is enabled for delayed paging.

a. The 600-Ohm audio output of the page port is also suited for interfaces with lower input impedances.
 b. 1 Amp at 30 VDC for continuous loads.