

Singlewire RGB Strobe

with SIP support

When installed, the wall-mounted Singlewire RGB Strobe operates as a visual alerting device.

In Singlewire mode, when an audio page is sent to the strobe, a specific color, brightness and blink rate can be selected based on the priority of the page. The Singlewire RGB Strobe supports 10 Singlewire priority levels*.

In the SIP mode, the device can be set up as part of a ring group (call group) with the Strobe's specific scene engaged as notification of incoming calls. Through a web page setup, you can have the Strobe respond to message waiting signals by blinking. When the message has been heard, the strobe stops blinking.

The Singlewire RGB Strobe may also be activated by being part of a Multicast group. When audio is detected on a specific Multicast address and port, the strobe will activate.

Users may also use CyberData's HTTP command set to directly access the strobe's functions.

*Informacast version 9.0.1 or higher is required to take advantage of this feature.

Features

- InformaCast
- Meets ADA requirements for telephony signaling and notification
- Multiple colors, Blink rate and brightness can be selected for each of the different activation methods
- Program or listen to up to 10 multicast addresses
- SIP activation
- Mailbox Message Waiting Indication
- Multicast activation
- Cisco SRST support
- Event-controlled relay
- Tamper sensor
- Web-based setup
- PoE-powered

Use areas include:

- Sales and support mailbox indication
- Classrooms
- Banks or financial institutions
- Court rooms
- Manufacturing warehouses
- Office
- Indoor only

CyberData

The IP Endpoint Company

CyberData


The IP Endpoint Company



Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible and InformaCast v4.0 and later
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
On-Board Relay	1A at 30 VDC
Operating Temperature	-10° C to 50° C (14° F to 122° F)
Payload Types	G711, A-law and μ -law
Dimensions	Length: 4.5 inches [115 mm] Width: 2.1 inches [55 mm] Height: 4.5 inches [115 mm]
Weight	1.0 lbs. (0.45 kg)
Boxed Weight	2.0 lbs. (0.90 kg)
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 years limited
Part Number	011377

SIP RGB Strobe

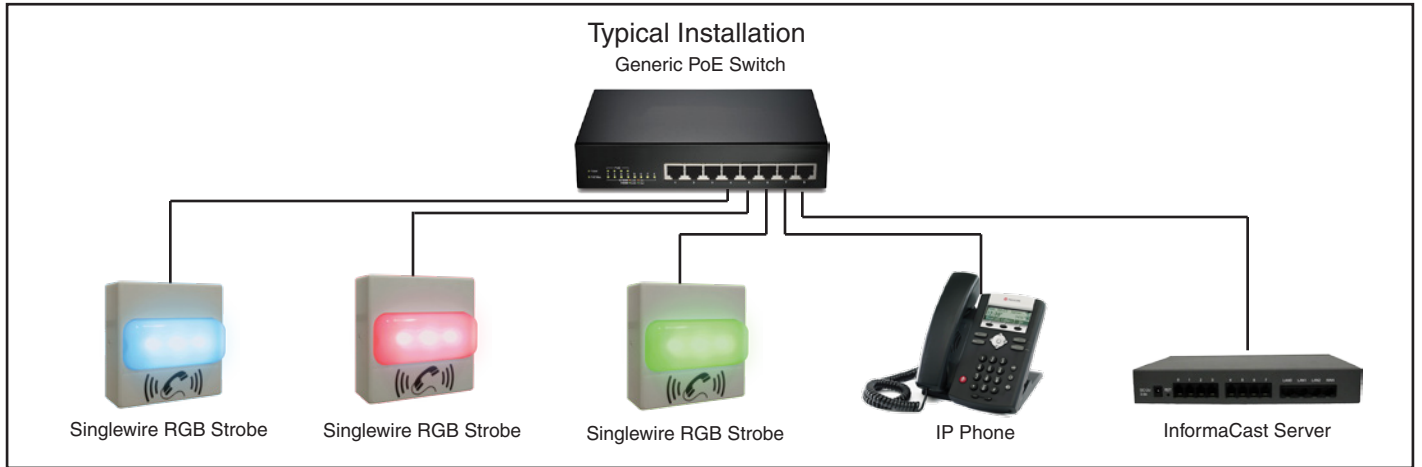

Mounting Options

