


Crown 180MA/280MA/1160MA (Two Amplified Output Channels) Amplifier

1

SIP Paging Zone Controller Connections

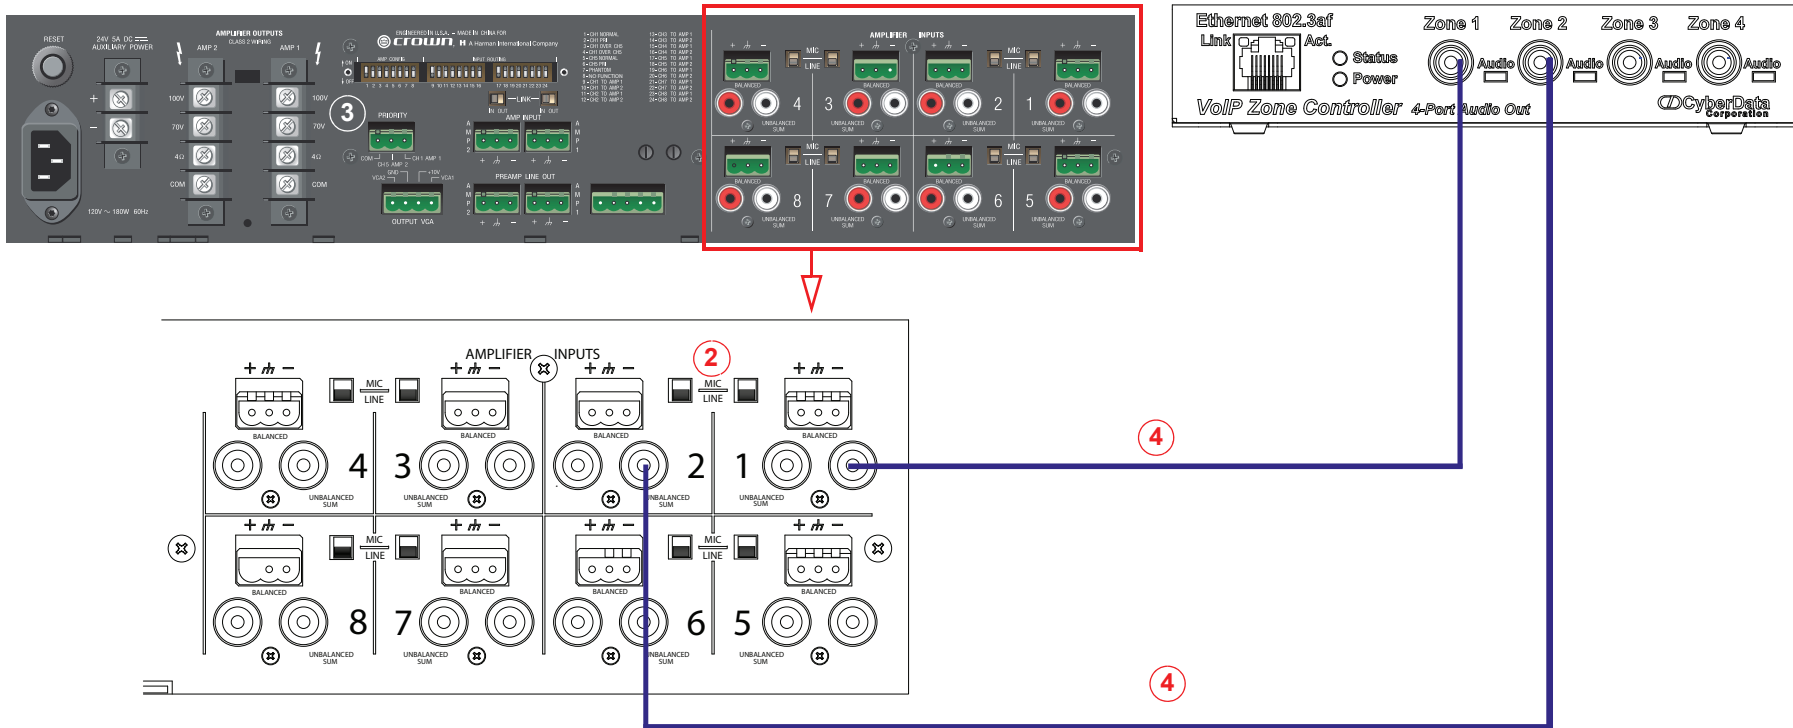

Notes

1. CyberData SIP Paging Zone Controller's Zone 1 and Zone 2 RCA line outputs connect to the RCA Line Input 1 and 2 respectively on the Crown 180MA/280MA/1160MA amplifier.
2. Move the MIC/LINE switch to the LINE position for the Respective Inputs
3. Set the Dipswitches on the Crown so Input 1 goes to amp 1 and Input 2 goes to amp 2
4. Use 2-conductor, shielded speaker wire terminated with RCA male connectors is recommended.
5. The Zone Controller can be set to play various Multicast streams designated out to specific Output port zones or to both zones simultaneously. It can also be set to be SIP called and then DTMF select a zone to page out thru, or DTMF select to "All Page".
6. In this configuration if Background Music is Needed to play out of the Amplifier channels, this can be done by setting up a line in to multicast channel on a CyberData Paging Server and have the 4-port zone controller listen for that multicast (at a low priority) to play out zone 1 and 2 of the V3 zone Controller