

SIP Compliant 011446 Parameter IP Addressing IP Address^a Web Access Username

Web Access Password Subnet Mask^a Default Gateway^a

a. Default if there is not a DHCP server present.

Getting Started

- Download the Multicast VoIP Microphone Operations Guide PDF file, from the product page at: https://www.cyberdata.net/products/011446
- Create a plan for the locations of your Multicast VoIP Microphones.
- instructions.
- WARNING: This enclosure is not rated for any AC voltages!

Parts



Contacting CyberData

Corporate Headquarters	
CyberData Corporation 3 Justin Court Monterey, CA 93940, USA	Sales: 8 Support Support
Phone: 831-373-2601 Fax: 831-373-4193 <u>https://www.cyberdata.net/</u>	RMA De Warrant

© 2023, CyberData Corporation, ALL RIGHTS RESERVED 931998A

CyberDataInstallation Quick ReferenceThe IP Endpoint CompanyMulticast VoIP Microphone

Factory Default Setting
DHCP
192.168.1.23
admin
admin
255.255.255.0
192.168.1.1

 WARNING: This product should be installed by a licensed electrician according to all local electrical and building codes. • WARNING: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation

• WARNING: The PoE connector is intended for intra-building connections only and does not route to the outside plant.

(1) Mounting Kit


(4) #6 x 1.25 inches Sheet Metal Screw




(4) #6 Ribbed Plastic Anchor

831-373-2601 ext. 334 t: 831-373-2601 ext. 333 Website: https://support.cyberdata.net/ epartment Contact and Status: https://support.cyberdata.net/ ty Information: https://support.cyberdata.net/


Dimensions

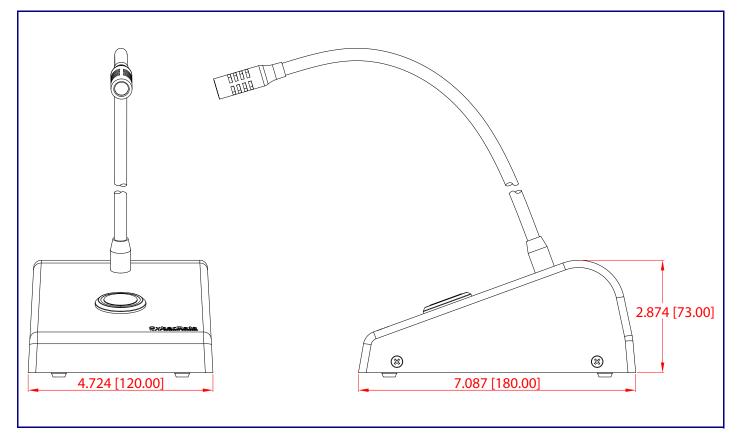


Paging to Multicast Enabled Endpoints

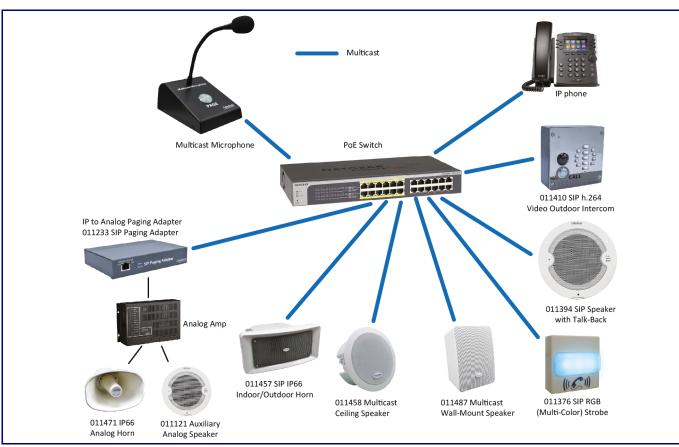

RTFM Button

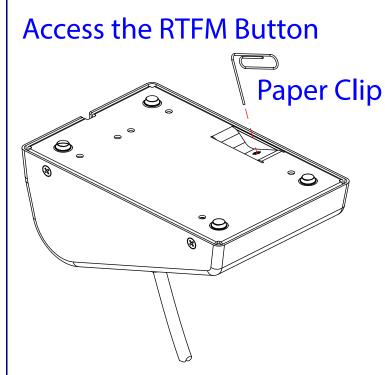

Connecting the Network Cable

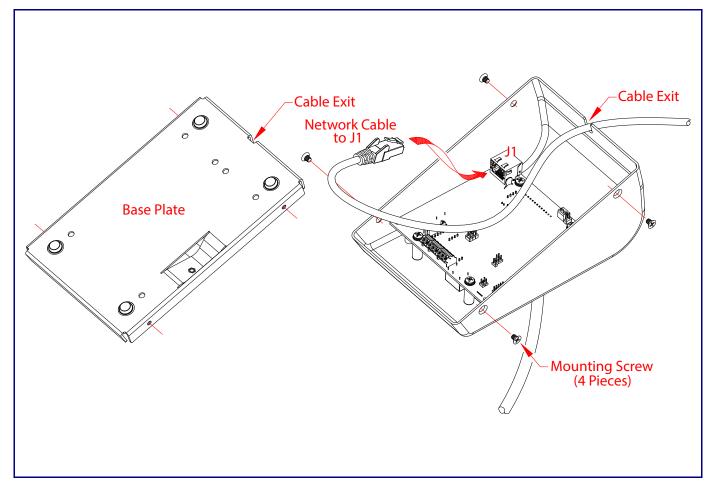

When the device is operational and linked to a network, you can use the Reset Test Function Management (RTFM) button to restore the device to the factory default settings.

To restore the device to factory default settings:

• Press and hold the RTFM button for more than five seconds, and then release the RTFM button.