RTFM Switch

RTFM Access

The RTFM switch access will be on the top side of the horn hidden under a screw that will be used to keep the unit secured. To access the RTFM, complete the following steps:

1. Remove the screw to gain access to the RTFM button (see the figure below).

2. Use a paper clip to feed through the hole to press the RTFM button (see the figure below).

Announce the IP Address


To broadcast the device's current IP address, press and hold the RTFM switch for a couple of seconds and then release it.

Restore the Factory Default Settings

To restore the factory defaults, complete the following steps:

1. Press and hold the RTFM switch until you hear the device announce the words, "restoring defaults" and "rebooting".

2. Release the RTFM switch. The device will be restored to the factory default settings.

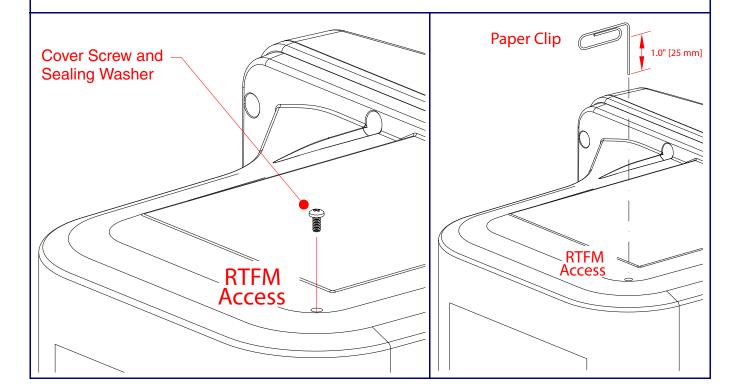


Contacting CyberData

Corporate Headquarters

CyberData Corporation **3 Justin Court** Monterey, CA 93940, USA

Phone: 831-373-2601 Fax: 831-373-4193 http://www.cyberdata.net/ Sales: 831-373-2601 ext. 334 Support: 831-373-2601 ext. 333 Support Website: http://support.cyberdata.net/ RMA Department Contact and Status: http://support.cyberdata.net/ Warranty Information: http://support.cyberdata.net/

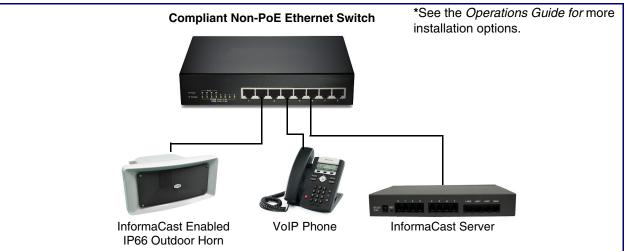

Getting Started

CyberData

The IP Endpoint Company

Typical System Installation

011472

Web Access Username

Web Access Password

Parameter **IP** Addressing


IP Address^a

Subnet Mask^a Default Gateway^a

- Download the Operations Guide PDF file from the **Documents** tab at the following webpage: https://www.cyberdata.net/products/011472
- · Create a plan for the locations of your paging amplifiers.
- instructions.
- WARNING: The InformaCast Enabled IP66 Outdoor Horn enclosure is not rated for any AC voltages!

Parts



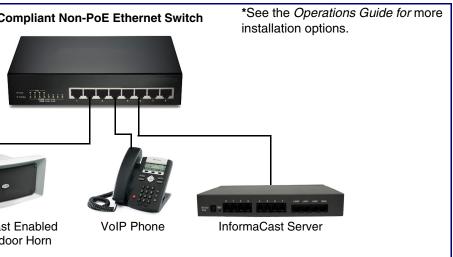

© 2021, CyberData Corporation, ALL RIGHTS RESERVED 931511F

Installation Quick Reference InformaCast Enabled IP66 Outdoor Horn


Factory Default Setting
DHCP
10.10.10.10
admin
admin
255.0.0.0
10.0.0.1

a. Default if there is not a DHCP server present.

WARNING: This product should be installed by a licensed electrician according to all local electrical and building codes. WARNING: To prevent injury, this apparatus must be securely attached to the floor/wall in accordance with the installation

WARNING: The PoE connector is intended for intra-building connections only and does not route to the outside plant.

Dimensions

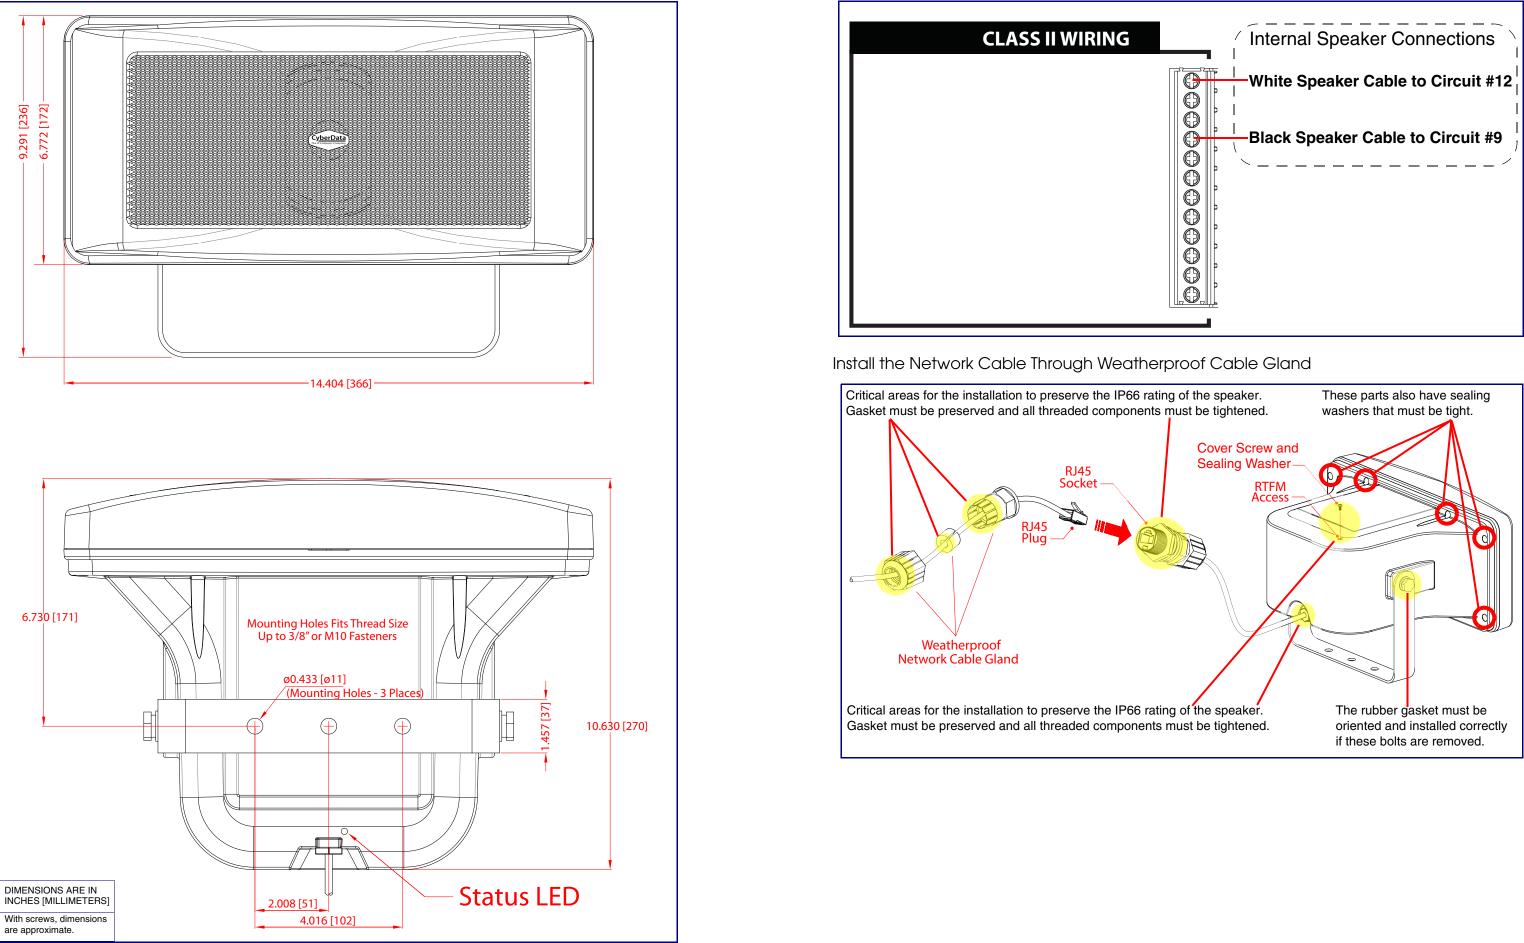

Connection Options