

# SIP Outdoor RGB (Multi-Color) Strobe

Now up to 38% brighter and upgraded to an IP66 rating, the wall-mounted SIP Outdoor RGB (Multi-Color) Strobe operates as a powerful and highly effective visual alerting device. The Outdoor Strobe can be set up as part of a ring group or page group to give visual notification of incoming calls or pages.

The Outdoor Strobe may also be activated by being part of a multicast group. The Strobe can be configured with up to 10 multicast addresses and is activated when a stream is sent to its address.

You can have the Strobe respond to message waiting signals by blinking. When the message has been heard, the Strobe stops blinking.

For each activation, the user may choose multiple colors, blink rates, and brightness levels. There are 10 multicast settings and two SIP extensions.

CyberData's SIP enabled VoIP products are compatible with a vast majority of VoIP systems including SBCs, Gateways, and phone systems both on-premise or cloud-based.

## Features

- Meets ADA requirements for telephony signaling and notification
- Simultaneous SIP and multicast
- Night Ringer function - second SIP extension that can be configured with its own strobe scene
- Door closure and tamper alert signals
- TLS 1.2 (including mutual authentication) and SRTP enhanced security for IP Endpoints in a local or cloud-based environment
- Autoprovisioning via HTTP, HTTPS, or TFTP
- HTTPS or HTTP web based configuration. HTTPS is enabled by default.
- Configurable event generation for device health and status monitoring
- 802.11q VLAN tagging
- HTTP command interface
- Support for Cisco SRST resiliency

## Use areas include:

- Shipping and receiving areas
- Parking garages and parking lots
- Socially Distanced Outdoor Gathering Areas
- Outdoor school amphitheaters, stadiums and playgrounds
- Anyplace needing an IP rated outdoor visual alert




## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
Brightness	366 Lux (white color)
On-Board Relay	1A @ 30 VDC
Network Security	TLS 1.2, SRTP, HTTPS
Payload Types	G.711 a-law, G.711μ-law, G.722, and G.729
IP Rating	IP66
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	5.1 inches [129.5 mm] Length 2.9 inches [73.66 mm] Width 5.1 inches [129.5 mm] Height
Weight	2.0 lbs [0.90 kg]
Boxed Weight	3.0 lbs [1.35 kg]
Compliance	CE: EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive –EN 62368-1; RoHS Compliant; FCC Part 15 Class A; Industry Canada ICES-3 Class A; IEEE 802.3 Compliant; TAA Compliant
Warranty	2 Years Limited
Part Number	011479


\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

# SIP Outdoor RGB (Multi-Color) Strobe

## Typical Installation

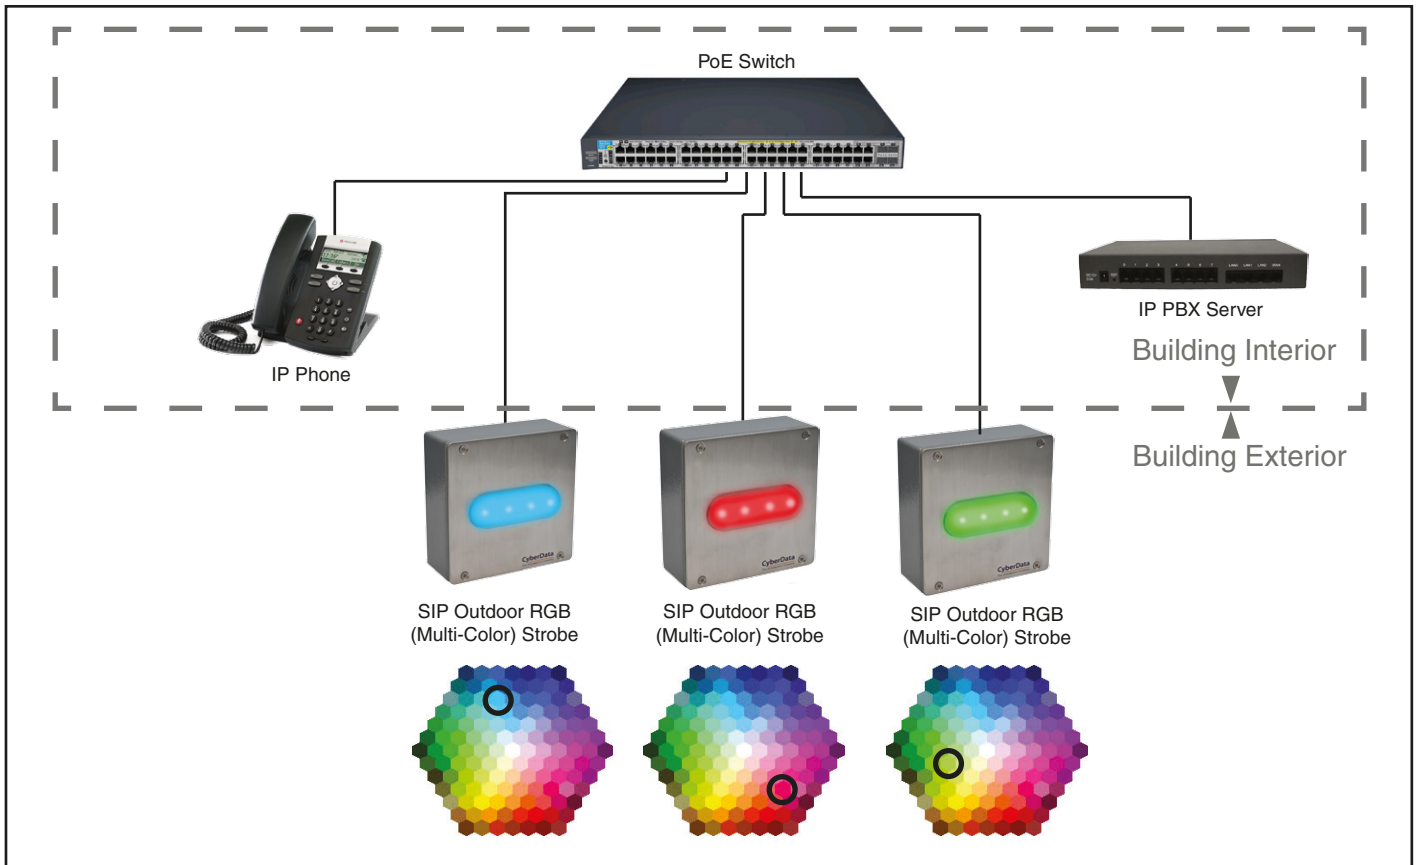

## Wall Mounting Option

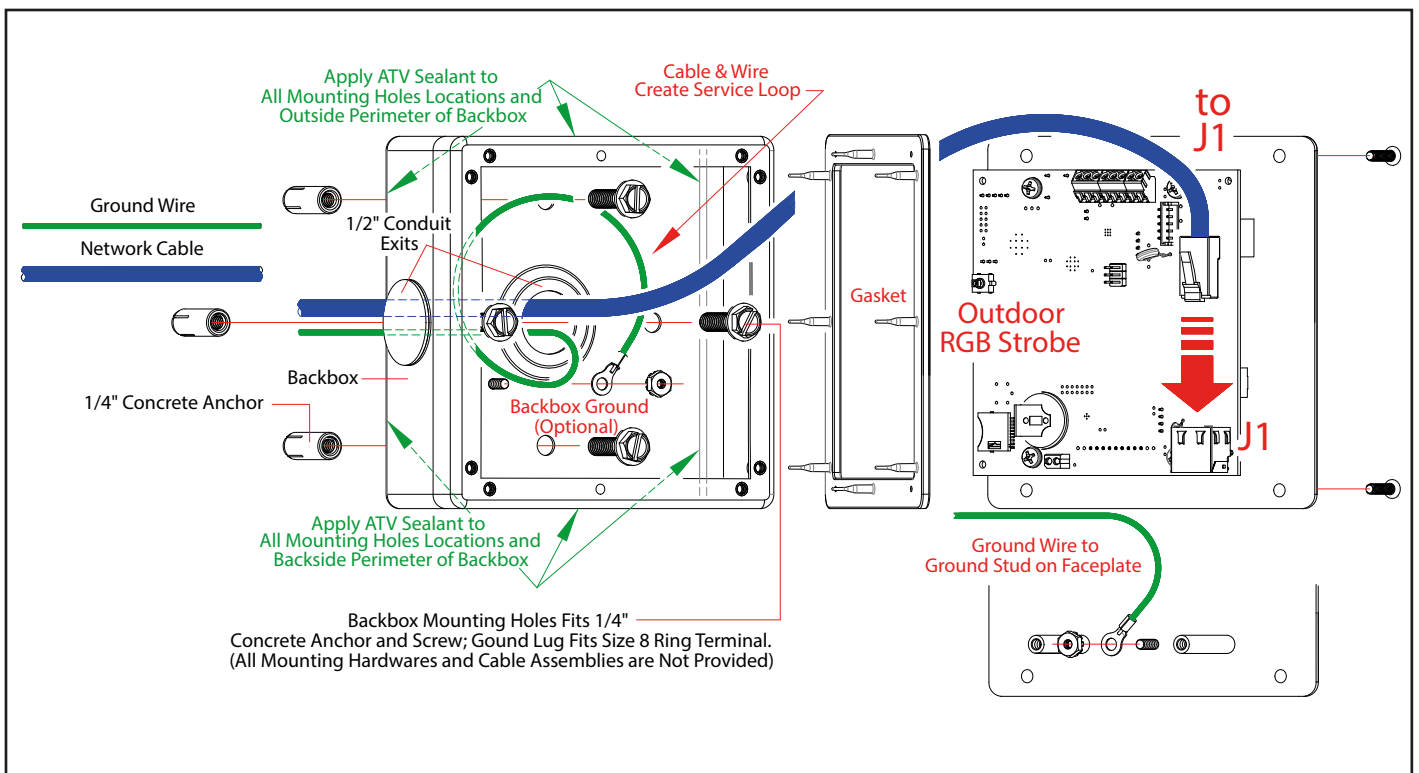

# SIP Outdoor RGB (Multi-Color) Strobe

## Dimensions

