

The wall-mounted InformaCast Enabled Outdoor RGB (Multi-Color) Strobe operates as an IP66 rated visual alerting device.

In InformaCast mode, when an audio page is sent to the Strobe, a specific color, brightness and blink rate can be selected based on the priority of the page. The Strobe supports 10 InformaCast priority levels\*.

In the SIP mode, the device can be set up as part of a ring group or call group to give visual notification of incoming calls or pages. You can have the Strobe respond to message waiting signals by blinking. When the message has been heard, the Strobe stops blinking.

The Outdoor Strobe may also be activated by being part of a multicast group. The Strobe can be configured with up to 10 multicast addresses and is activated when a stream is sent to its address. Users may also use CyberData's HTTP command set to directly access the Strobe's functions.

\*InformaCast v9.0.1 or higher is required to take advantage of this feature.

## Features

- Meets ADA requirements for telephony signaling and notification
- Compatible with Singlewire InformaCast v12.1, including support for downloading SIP credentials from InformaCast
- TLS 1.2, enhanced security for IP Endpoints in a local or cloud-based environment
- Compatible with Cisco Call Manager
- Multiple colors, blink rate, and brightness can be selected for each of the different activation methods
- SIP and multicast activation
- Cisco SRST support
- Event-controlled relay and tamper sensor
- Web-based setup

## Use areas include:

- Shipping and receiving areas
- Parking garages and parking lots
- Playgrounds
- Places of Refuge
- Anyplace needing an IP rated outdoor visual alert




## Specifications

Ethernet I/F	10/100 Mbps
Protocol	SIP RFC 3261 Compatible
Notification Software	Singlewire InformaCast v4.0 and above
Power Input	PoE 802.3af compliant or +8 to +12VDC @ 1000mA Regulated Power Supply (not included)
Flash rate	5 user-defined scenes
LED MTBF	100,000 Hours
On-Board Relay	1A @ 30 VDC
Network Security	TLS/SSL 1.2
IP Rating	IP66
Operating Range	Temperature: -40° C to 55° C (-40° F to 131° F) Humidity: 5-95%, non-condensing
Storage Temperature	-40° C to 70° C (-40° F to 158° F)
Storage Altitude	Up to 15,000 ft. (4573 m)
Dimensions*	5.1 inches [129.5 mm] Length 2.9 inches [73.66 mm] Width 5.1 inches [129.5 mm] Height
Weight	2.0 lbs [0.90 kg]
Boxed Weight	3.0 lbs [1.35 kg]
Compliance	CE; EMC Directive – Class A EN 55032 & EN 55024, LV Safety Directive – EN 60950-1, RoHS Compliant, FCC; Part 15 Class A, Industry Canada; ICES-3 Class A, IEEE 802.3 Compliant
Warranty	2 Years Limited
Part Number	011489

\*Dimensions are measured from the perspective of the product being upright with the front of the product facing you.

# InformaCast Enabled Outdoor RGB (Multi-Color) Strobe

## Typical Installation

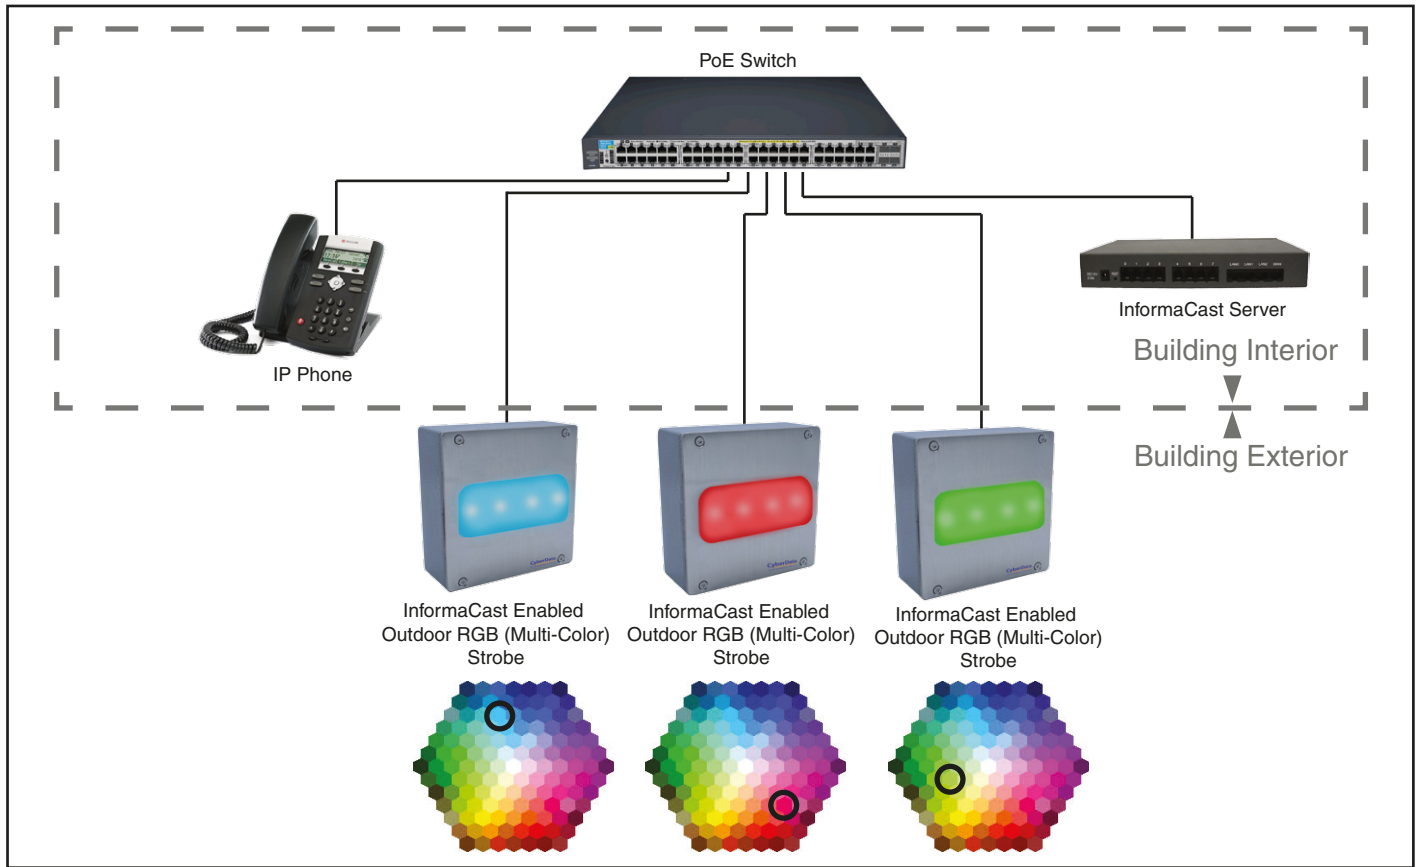

## Wall Mounting Option

